


日立照明器具 照明特性

形式: MK4011P+HF400X	反射率	天井	80%			70%				50%			30%			0%
<高効率・広照形>		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%												0%	
	室指数	照明率 S/H=1.0														
姿図 	0.6	0.64	0.57	0.52	0.63	0.56	0.52	0.49	0.56	0.52	0.49	0.55	0.52	0.49	0.48	
	0.8	0.71	0.65	0.61	0.70	0.65	0.61	0.58	0.64	0.60	0.58	0.63	0.60	0.57	0.56	
	1	0.75	0.70	0.66	0.74	0.69	0.66	0.63	0.68	0.65	0.63	0.68	0.65	0.62	0.61	
	1.25	0.79	0.74	0.71	0.78	0.74	0.70	0.68	0.72	0.70	0.67	0.71	0.69	0.67	0.66	
	1.5	0.81	0.77	0.74	0.80	0.77	0.74	0.71	0.75	0.73	0.71	0.74	0.72	0.70	0.69	
	2	0.84	0.81	0.78	0.83	0.80	0.78	0.76	0.79	0.77	0.75	0.78	0.76	0.74	0.73	
	2.5	0.86	0.83	0.81	0.85	0.82	0.80	0.78	0.81	0.79	0.77	0.80	0.78	0.77	0.75	
	3	0.87	0.84	0.82	0.86	0.84	0.82	0.80	0.82	0.80	0.79	0.81	0.79	0.78	0.76	
	光源	4	0.88	0.86	0.84	0.87	0.85	0.84	0.82	0.84	0.82	0.81	0.82	0.81	0.80	0.78
	品名	5	0.89	0.87	0.86	0.88	0.87	0.85	0.84	0.85	0.84	0.83	0.83	0.82	0.82	0.80
形式	7	0.90	0.89	0.88	0.89	0.88	0.87	0.87	0.87	0.86	0.85	0.85	0.84	0.84	0.82	
光束	10	0.91	0.91	0.90	0.90	0.90	0.89	0.89	0.88	0.88	0.87	0.86	0.86	0.86	0.83	

器具効率 Ft= 84.8%			
上方光束 Fu= 0.0%			
下方光束 Fd= 84.8%			
配光分類			
BZ-			
最大取付間隔			
A-A	1.24 H		
B-B	H		
保守率	良	0.73	
	中	0.69	
	否	0.61	
光度 (cd/1000 lm)			
	A-0	B-B	C-0
0	512		
10	506		
20	582		
30	463		
40	236		
50	104		
60	18		
70			
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

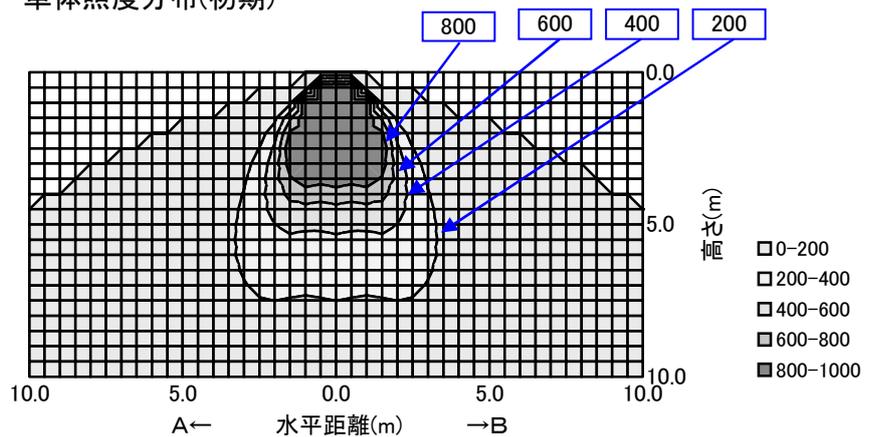

配光曲線

