

日立照明器具 照明特性

形式：MK4011P+MF180CL		反 射 率	天井	80%			70%				50%			30%			0%
<高効率・広照形>			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			床	10%													
		室指数	照明率 S/H=1.0														
		0.6	0.65	0.57	0.53	0.64	0.57	0.53	0.50	0.56	0.52	0.49	0.55	0.52	0.49	0.48	
		0.8	0.72	0.66	0.62	0.71	0.65	0.61	0.58	0.64	0.61	0.58	0.63	0.60	0.58	0.56	
		1	0.77	0.71	0.67	0.75	0.70	0.67	0.64	0.69	0.66	0.63	0.68	0.65	0.63	0.61	
		1.25	0.80	0.75	0.72	0.79	0.75	0.71	0.69	0.73	0.70	0.68	0.72	0.69	0.67	0.66	
		1.5	0.83	0.78	0.75	0.82	0.78	0.75	0.72	0.76	0.74	0.71	0.75	0.73	0.71	0.69	
		2	0.86	0.82	0.80	0.85	0.81	0.79	0.77	0.80	0.78	0.76	0.78	0.76	0.75	0.73	
		2.5	0.87	0.84	0.82	0.86	0.83	0.81	0.79	0.82	0.80	0.78	0.80	0.78	0.77	0.75	
		3	0.88	0.86	0.83	0.87	0.85	0.83	0.81	0.83	0.81	0.80	0.81	0.80	0.78	0.76	
光 源		4	0.89	0.87	0.86	0.88	0.86	0.85	0.83	0.84	0.83	0.82	0.83	0.81	0.80	0.78	
品名	<メテラム・L>	5	0.90	0.89	0.87	0.89	0.88	0.86	0.85	0.86	0.85	0.84	0.84	0.83	0.82	0.79	
形式	MF200CL/BUD/180-V	7	0.92	0.91	0.90	0.91	0.90	0.89	0.88	0.88	0.87	0.86	0.86	0.85	0.84	0.82	
光束	19,800 lm	10	0.93	0.92	0.92	0.92	0.91	0.91	0.90	0.89	0.89	0.88	0.87	0.87	0.86	0.83	

器具効率 Ft= 86.7%

上方光束 Fu= 2.0%

下方光束 Fd= 84.7%

配光分類

BZ-

最大取付間隔

A-A 1.46 H


B-B H

保守率	良	0.74
	中	0.70
	否	0.62

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	352		
10	453		
20	598		
30	491		
40	249		
50	88		
60	10		
70	2		
80	1		
90	1		
100	2		
110	1		
120	2		
130	3		
140	6		
150	7		
160	8		
170	4		
180			

単体照度分布(初期)

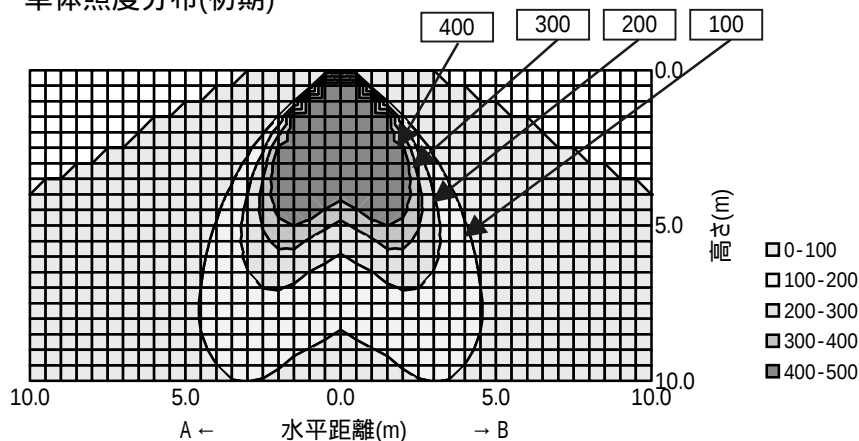

配光曲線

