

日立照明器具 照明特性

形式: MK4011P+MF250CL		天井	80%			70%				50%			30%			0%
<高効率・広照形>		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.66	0.59	0.55	0.66	0.59	0.55	0.52	0.58	0.55	0.52	0.58	0.54	0.52	0.50
		0.8	0.74	0.68	0.64	0.73	0.67	0.64	0.61	0.67	0.63	0.61	0.66	0.63	0.60	0.59
		1	0.78	0.73	0.69	0.77	0.72	0.69	0.66	0.71	0.68	0.66	0.71	0.68	0.66	0.64
		1.25	0.82	0.77	0.74	0.81	0.77	0.73	0.71	0.76	0.73	0.70	0.74	0.72	0.70	0.69
		1.5	0.84	0.80	0.77	0.83	0.80	0.77	0.74	0.78	0.76	0.74	0.77	0.75	0.73	0.72
		2	0.87	0.84	0.82	0.86	0.83	0.81	0.79	0.82	0.80	0.78	0.81	0.79	0.77	0.76
		2.5	0.89	0.86	0.84	0.88	0.85	0.83	0.81	0.84	0.82	0.80	0.82	0.81	0.80	0.78
		3	0.90	0.87	0.85	0.89	0.86	0.85	0.83	0.85	0.83	0.82	0.83	0.82	0.81	0.79
		4	0.91	0.89	0.87	0.90	0.88	0.87	0.85	0.87	0.85	0.84	0.85	0.84	0.83	0.81
		5	0.92	0.90	0.89	0.91	0.89	0.88	0.87	0.88	0.87	0.86	0.86	0.85	0.84	0.82
品名	<メタセラム・L>	7	0.93	0.92	0.91	0.92	0.91	0.90	0.90	0.90	0.89	0.88	0.88	0.87	0.87	0.85
形式	MF250CL/BUD/230VB	10	0.94	0.94	0.93	0.93	0.93	0.92	0.92	0.91	0.91	0.90	0.89	0.89	0.89	0.86
光束	25,300 lm															

器具効率 Ft= 87.5%

上方光束 Fu= 0.0%

下方光束 Fd= 87.5%

配光分類

BZ-

最大取付間隔

A-A 1.54 H


B-B H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	307		
10	504		
20	649		
30	486		
40	258		
50	94		
60	5		
70			
80			
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

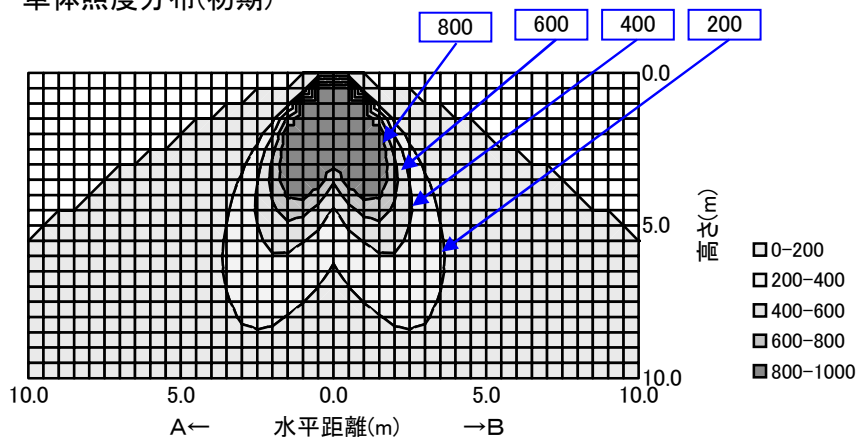

配光曲線

