

日立照明器具 照明特性

形式： MK4011P+MF400CL		反 射 率	天井	80%			70%				50%			30%			0%		
＜高効率・広照形＞			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.68	0.60	0.55	0.67	0.59	0.55	0.51	0.58	0.54	0.51	0.58	0.54	0.51	0.50			
		0.8	0.76	0.69	0.64	0.75	0.68	0.64	0.61	0.67	0.63	0.60	0.66	0.63	0.60	0.59			
		1	0.80	0.74	0.70	0.79	0.74	0.70	0.67	0.73	0.69	0.66	0.71	0.68	0.66	0.64			
		1.25	0.84	0.79	0.75	0.83	0.78	0.75	0.72	0.77	0.74	0.71	0.76	0.73	0.71	0.69			
		1.5	0.87	0.83	0.79	0.86	0.82	0.78	0.76	0.80	0.77	0.75	0.79	0.76	0.74	0.72			
		2	0.91	0.87	0.84	0.89	0.86	0.83	0.81	0.84	0.82	0.80	0.83	0.81	0.79	0.77			
		2.5	0.92	0.89	0.86	0.91	0.88	0.86	0.84	0.86	0.84	0.82	0.85	0.83	0.81	0.79			
		3	0.93	0.91	0.88	0.92	0.90	0.87	0.85	0.88	0.86	0.84	0.86	0.84	0.83	0.81			
光 源		4	0.95	0.93	0.91	0.94	0.92	0.90	0.88	0.90	0.88	0.87	0.88	0.86	0.85	0.83			
品名	＜メタセラム・L＞	5	0.96	0.94	0.92	0.95	0.93	0.92	0.90	0.91	0.90	0.89	0.89	0.88	0.87	0.85			
形式	MF400CL/BUD/360VB	7	0.97	0.96	0.95	0.96	0.95	0.94	0.93	0.93	0.92	0.91	0.91	0.90	0.90	0.87			
光束	43,500 lm	10	0.99	0.98	0.97	0.97	0.97	0.96	0.96	0.95	0.94	0.94	0.93	0.92	0.92	0.89			

器具効率 $F_t = 91.9\%$
 上方光束 $F_u = 1.3\%$
 下方光束 $F_d = 90.6\%$

配光分類

BZ-

最大取付間隔

A-A 1.32 H


B-B H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	498		
10	516		
20	576		
30	511		
40	258		
50	112		
60	22		
70	4		
80	2		
90	1		
100	2		
110	3		
120	4		
130	4		
140			
150			
160			
170			
180			

単体照度分布(初期)

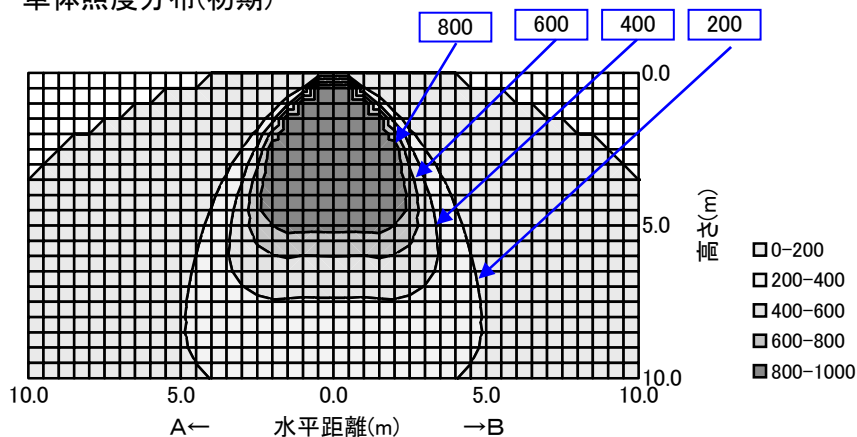

配光曲線

