

日立照明器具 照明特性

形式：MK4011P+MF400L		反 射 率	天井	80%			70%				50%			30%			0%	
＜高効率・広照形＞			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%														0%
			室指数	照明率 S/H=1.0														
		0.6	0.68	0.60	0.55	0.67	0.59	0.55	0.51	0.58	0.54	0.51	0.58	0.54	0.51	0.50		
		0.8	0.76	0.69	0.64	0.75	0.68	0.64	0.61	0.67	0.63	0.60	0.66	0.63	0.60	0.59		
		1	0.80	0.74	0.70	0.79	0.74	0.70	0.67	0.73	0.69	0.66	0.71	0.68	0.66	0.64		
		1.25	0.84	0.79	0.75	0.83	0.78	0.75	0.72	0.77	0.74	0.71	0.76	0.73	0.71	0.69		
		1.5	0.87	0.83	0.79	0.86	0.82	0.78	0.76	0.80	0.77	0.75	0.79	0.76	0.74	0.72		
		2	0.91	0.87	0.84	0.89	0.86	0.83	0.81	0.84	0.82	0.80	0.83	0.81	0.79	0.77		
		2.5	0.92	0.89	0.86	0.91	0.88	0.86	0.84	0.86	0.84	0.82	0.85	0.83	0.81	0.79		
		3	0.93	0.91	0.88	0.92	0.90	0.87	0.85	0.88	0.86	0.84	0.86	0.84	0.83	0.81		
光 源		4	0.95	0.93	0.91	0.94	0.92	0.90	0.88	0.90	0.88	0.87	0.88	0.86	0.85	0.83		
品名	メタルハライドランプ	5	0.96	0.94	0.92	0.95	0.93	0.92	0.90	0.91	0.90	0.89	0.89	0.88	0.87	0.85		
形式	MF400L-B/BU-P	7	0.97	0.96	0.95	0.96	0.95	0.94	0.93	0.93	0.92	0.91	0.91	0.90	0.90	0.87		
光束	42,000 lm	10	0.99	0.98	0.97	0.97	0.97	0.96	0.96	0.95	0.94	0.94	0.93	0.92	0.92	0.89		

器具効率 F_t	91.9%
上方光束 F_u	1.3%
下方光束 F_d	90.6%

配光分類

BZ-

最大取付間隔

A-A	1.32	H
-----	------	---


B-B	H
-----	---

保守率	良	0.50
	中	0.47
	否	0.42

光 度 (cd/1000 lm)

	A-0	B-B	C-0
0	498		
10	516		
20	576		
30	511		
40	258		
50	112		
60	22		
70	4		
80	2		
90	1		
100	2		
110	3		
120	4		
130	4		
140			
150			
160			
170			
180			

单体照度分布(初期)

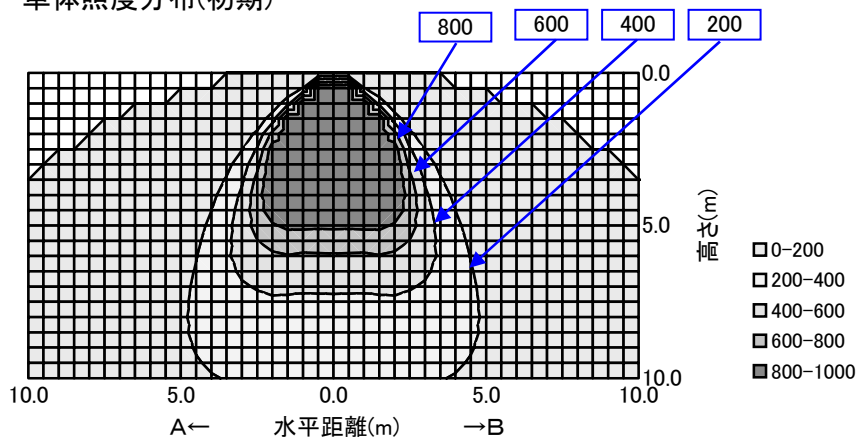

配光曲線

