


日立照明器具 照明特性

形式: MK4012+HF400X		天井	80%			70%				50%			30%			0%
<狭照明>	反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
		室指数	照明率 S/H=1.0													
姿図 	0.6		0.59	0.54	0.50	0.58	0.53	0.50	0.48	0.53	0.50	0.48	0.52	0.49	0.47	0.46
	0.8		0.64	0.60	0.56	0.63	0.59	0.56	0.54	0.58	0.55	0.53	0.57	0.55	0.53	0.52
	1		0.67	0.63	0.60	0.66	0.62	0.60	0.57	0.61	0.59	0.57	0.60	0.58	0.56	0.55
	1.25		0.70	0.66	0.63	0.69	0.66	0.63	0.61	0.64	0.62	0.60	0.63	0.61	0.59	0.58
	1.5		0.72	0.69	0.66	0.71	0.68	0.65	0.63	0.66	0.64	0.63	0.65	0.63	0.62	0.60
	2		0.74	0.71	0.69	0.73	0.71	0.69	0.67	0.69	0.67	0.66	0.67	0.66	0.65	0.63
	2.5		0.75	0.73	0.71	0.74	0.72	0.70	0.69	0.70	0.69	0.68	0.69	0.67	0.66	0.64
	3		0.76	0.74	0.72	0.75	0.73	0.72	0.70	0.71	0.70	0.69	0.69	0.68	0.67	0.65
	4		0.77	0.76	0.74	0.76	0.75	0.73	0.72	0.73	0.71	0.70	0.71	0.70	0.69	0.66
	5		0.78	0.77	0.76	0.77	0.76	0.75	0.74	0.74	0.73	0.72	0.71	0.71	0.70	0.67
光源																
品名	蛍光水銀ランプ															
形式	HF400X															
光束	22,000 lm															
			7													
			10													

器具効率 Ft= 75.1%
 上方光束 Fu= 3.6%
 下方光束 Fd= 71.5%

配光分類

BZ-

最大取付間隔

A-A 0.74 H


B-B H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	897		
10	806		
20	551		
30	268		
40	143		
50	73		
60	21		
70	6		
80	2		
90	2		
100	3		
110	5		
120	7		
130	8		
140	9		
150	8		
160	5		
170	3		
180	2		

単体照度分布(初期)

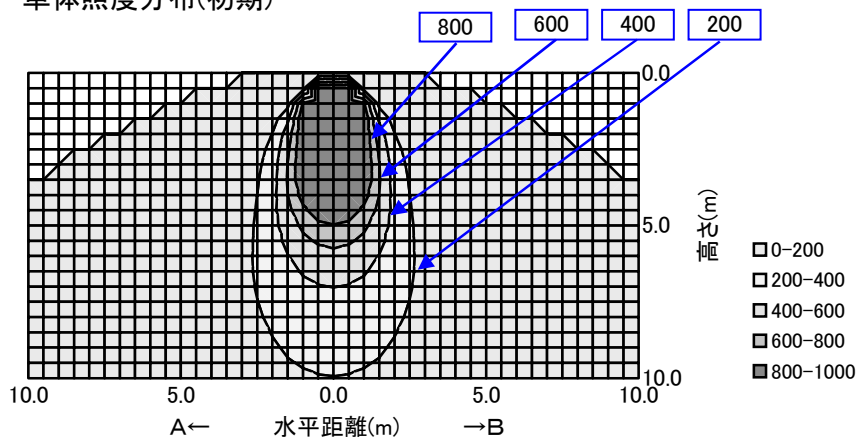

配光曲線

