


日立照明器具 照明特性

形式：MK4012+MF400L		反 射 率	天井	80%			70%				50%			30%			0%		
＜狭照明＞			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.61	0.56	0.52	0.60	0.55	0.52	0.50	0.55	0.52	0.49	0.54	0.51	0.49	0.48			
		0.8	0.66	0.62	0.58	0.66	0.61	0.58	0.56	0.60	0.57	0.55	0.59	0.57	0.55	0.54			
		1	0.70	0.65	0.62	0.69	0.65	0.62	0.59	0.64	0.61	0.59	0.63	0.60	0.58	0.57			
		1.25	0.72	0.69	0.66	0.71	0.68	0.65	0.63	0.67	0.64	0.62	0.65	0.63	0.62	0.60			
		1.5	0.74	0.71	0.68	0.73	0.70	0.68	0.66	0.69	0.67	0.65	0.68	0.66	0.64	0.63			
		2	0.77	0.74	0.72	0.76	0.73	0.71	0.69	0.72	0.70	0.68	0.70	0.69	0.67	0.66			
		2.5	0.78	0.76	0.74	0.77	0.75	0.73	0.71	0.73	0.72	0.70	0.72	0.70	0.69	0.67			
		3	0.79	0.77	0.75	0.78	0.76	0.74	0.73	0.74	0.73	0.72	0.73	0.71	0.70	0.68			
光 源		4	0.80	0.78	0.77	0.79	0.77	0.76	0.75	0.76	0.74	0.73	0.74	0.73	0.72	0.70			
品名	メタルハライドランプ	5	0.81	0.79	0.78	0.80	0.78	0.77	0.76	0.77	0.76	0.75	0.75	0.74	0.73	0.71			
形式	MF400L-B/BU-P	7	0.82	0.81	0.80	0.81	0.80	0.79	0.78	0.78	0.77	0.77	0.76	0.76	0.75	0.73			
光束	42,000 lm	10	0.83	0.82	0.81	0.82	0.81	0.81	0.80	0.79	0.79	0.78	0.77	0.77	0.76	0.74			

器具効率 $F_t = 77.4\%$

上方光束 $F_u = 2.1\%$

下方光束 $F_d = 75.3\%$

配光分類

BZ-

最大取付間隔

A-A 0.58 H


B-B H

保守率	良	0.73
	中	0.69
	否	0.61

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	1156		
10	842		
20	541		
30	296		
40	143		
50	78		
60	28		
70	9		
80	2		
90	2		
100	2		
110	3		
120	4		
130	4		
140	5		
150	4		
160	3		
170	3		
180	2		

単体照度分布(初期)

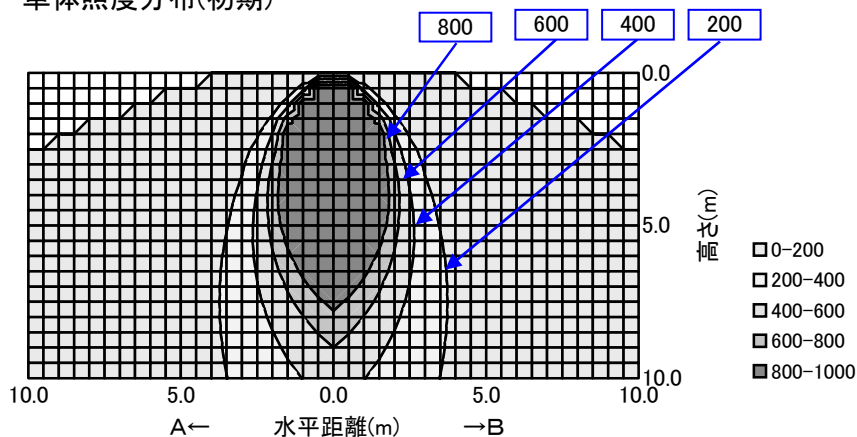

配光曲線

