


日立照明器具 照明特性

形式：MK4012+HN360FL		反 射 率	天井	80%			70%				50%			30%			0%		
＜狭照明＞			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
			室指数	照明率 S/H=1.0															
姿図 		0.6	0.57	0.52	0.48	0.56	0.51	0.48	0.46	0.51	0.48	0.46	0.50	0.47	0.46	0.45			
		0.8	0.62	0.57	0.54	0.61	0.57	0.54	0.52	0.56	0.53	0.51	0.55	0.53	0.51	0.50			
		1	0.65	0.61	0.58	0.64	0.60	0.57	0.55	0.59	0.57	0.55	0.58	0.56	0.54	0.53			
		1.25	0.67	0.64	0.61	0.66	0.63	0.61	0.59	0.62	0.60	0.58	0.61	0.59	0.57	0.56			
		1.5	0.69	0.66	0.63	0.68	0.65	0.63	0.61	0.64	0.62	0.60	0.63	0.61	0.60	0.58			
		2	0.71	0.69	0.67	0.70	0.68	0.66	0.64	0.67	0.65	0.64	0.65	0.64	0.63	0.61			
		2.5	0.72	0.70	0.68	0.71	0.69	0.68	0.66	0.68	0.66	0.65	0.66	0.65	0.64	0.62			
		3	0.73	0.71	0.70	0.72	0.70	0.69	0.68	0.69	0.67	0.66	0.67	0.66	0.65	0.63			
光 源		4	0.74	0.73	0.71	0.73	0.72	0.70	0.69	0.70	0.69	0.68	0.68	0.67	0.67	0.65			
品名	高圧ナトリウムランプ	5	0.75	0.74	0.73	0.74	0.73	0.72	0.71	0.71	0.70	0.69	0.69	0.68	0.68	0.66			
形式	NH360FL	7	0.76	0.75	0.74	0.75	0.74	0.73	0.73	0.72	0.72	0.71	0.70	0.70	0.69	0.67			
光束	47,000 lm	10	0.77	0.76	0.76	0.76	0.75	0.75	0.74	0.73	0.73	0.72	0.71	0.71	0.71	0.68			

器具効率 Ft= 71.8%

上方光束 Fu= 2.3%

下方光束 Fd= 69.4%

配光分類

BZ-

最大取付間隔

A-A 0.68 H


B-B H

保守率	良	0.78
	中	0.74
	否	0.65

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	924		
10	787		
20	512		
30	272		
40	143		
50	68		
60	23		
70	4		
80	2		
90	1		
100	2		
110	4		
120	5		
130	5		
140	5		
150	4		
160	3		
170	2		
180	2		

単体照度分布(初期)

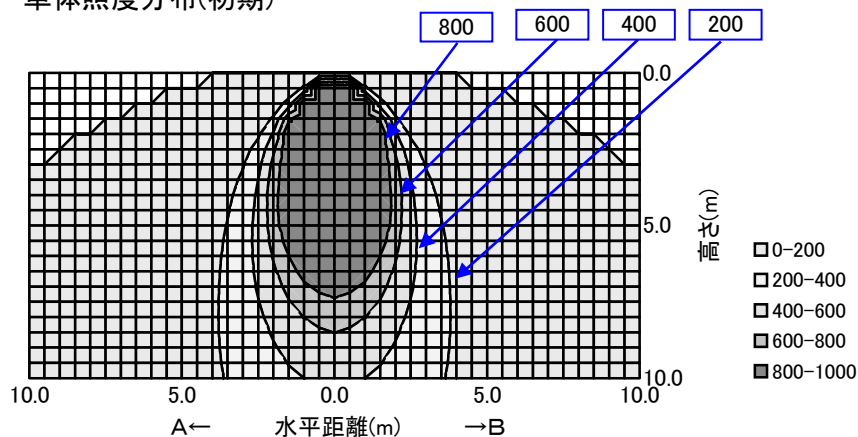

配光曲線

