

日立照明器具 照明特性

形式: MT10011A+M1000BSC

<狭角形・重耐塩耐食形(アルミ反射板)>

姿図



光源

品名	メタルハライドランプ・SC(透明)
形式	M1000B/BH-SC
光束	103,600 lm

ビーム特性




ビーム効率	1/10°-ム効率	31.8%
	30° 効率	38.2%
	60° 効率	57.3%
	90° 効率	68.8%

ビームの開き(1/10°-ム角)	24.0°
中心光度 (cd/1000 lm)	10,480

保守率	良	0.69
	中	0.66
	否	0.62

光度 (cd/1000 lm)

0°	10480	25°	248
1°	9740	30°	158
2°	6890	35°	118
3°	5035	40°	106
4°	4145	45°	98
5°	3100	50°	68
6°	2580	55°	32
7°	2160	60°	4
8°	1865	65°	2
9°	1610	70°	1
10°	1440	75°	1
11°	1265	80°	1
12°	1048	85°	1
13°	913	90°	
14°	771		
15°	658		
16°	567		
17°	485		
18°	438		
19°	398		
20°	355		

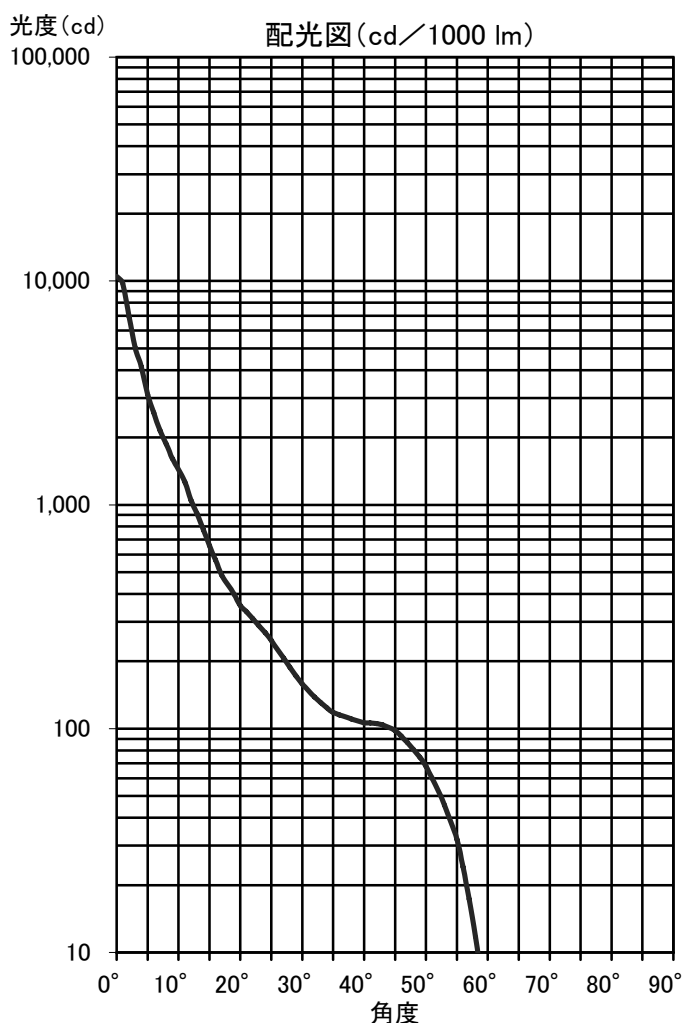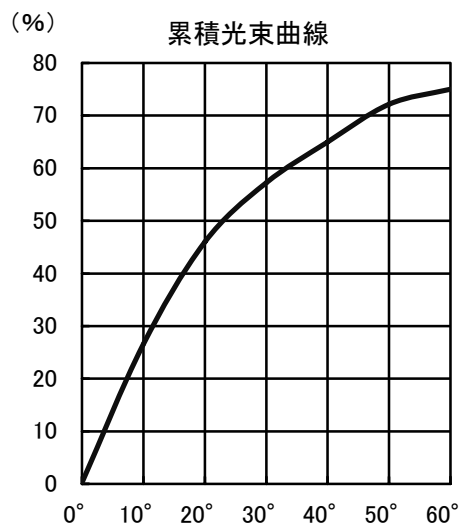

MT10011A+M1000BSC(R0)