

日立照明器具 照明特性

形式: MT10014A+H700

<中角形・重耐塩耐食形(ステンレス反射板)>

姿図



光源

品名	透明水銀ランプ
形式	H700
光束	38,000 lm

ビーム特性




ビーム効率	1/10ビーム効率	43.1%
	30° 効率	29.3%
	60° 効率	50.4%
	90° 効率	62.1%

ビームの開き(1/10ビーム角)	46.4°
中心光度 (cd/1000 lm)	2,960

保守率	良	0.78
	中	0.74
	否	0.70

光度 (cd/1000 lm)

0°	2960	25°	245
1°		30°	185
2°		35°	132
3°		40°	101
4°		45°	75
5°	2320	50°	48
6°		55°	15
7°		60°	7
8°		65°	3
9°		70°	1
10°	1210	75°	1
11°		80°	
12°		85°	
13°		90°	
14°			
15°	692		
16°			
17°			
18°			
19°			
20°	425		

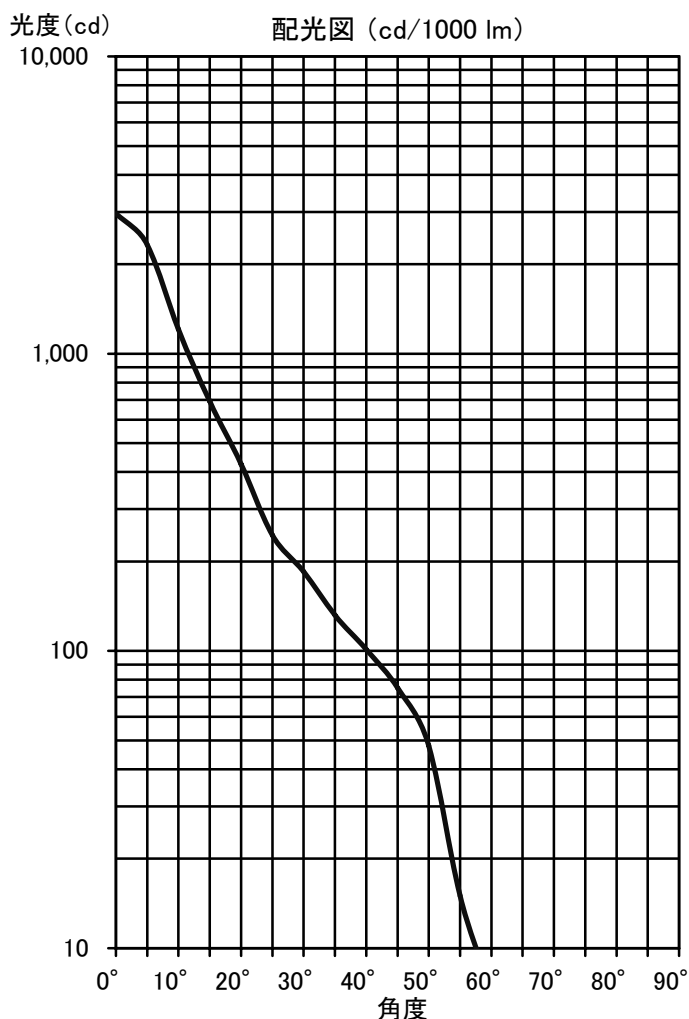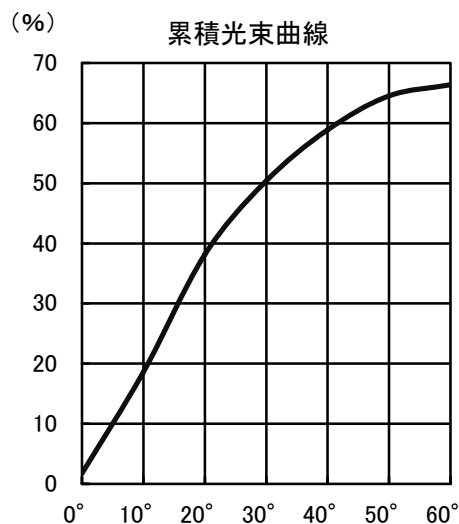

MT10014A+H700(R0)