

日立照明器具 照明特性

形式: MT1001B+M1000BSC

<狭角形・普及タイプ>

姿図



光源

品名	メタルハライドランプ・SC(透明)
形式	M1000B/BH-SC
光束	103,600 lm

ビーム特性




ビーム効率	1/10°-ム効率	25.8%
	30° 効率	27.2%
	60° 効率	46.2%
	90° 効率	59.1%

ビームの開き(1/10°-ム角)	28.4°
中心光度 (cd/1000 lm)	6,400

保守率	良	0.69
	中	0.66
	否	0.62

光度 (cd/1000 lm)

0°	6400	25°	242
1°	5800	30°	193
2°	4720	35°	132
3°	3630	40°	118
4°	2970	45°	100
5°	2300	50°	72
6°	1770	55°	33
7°	1430	60°	7
8°	1270	65°	3
9°	1050	70°	2
10°	985	75°	1
11°	915	80°	1
12°	772	85°	
13°	711	90°	
14°	663		
15°	562		
16°	518		
17°	460		
18°	423		
19°	402		
20°	360		

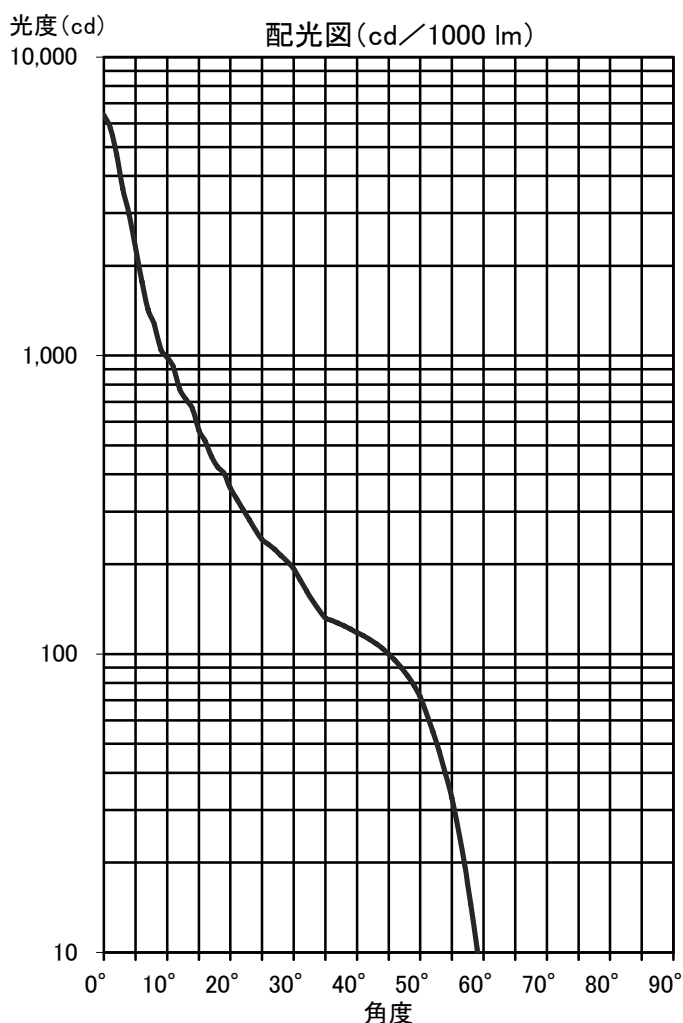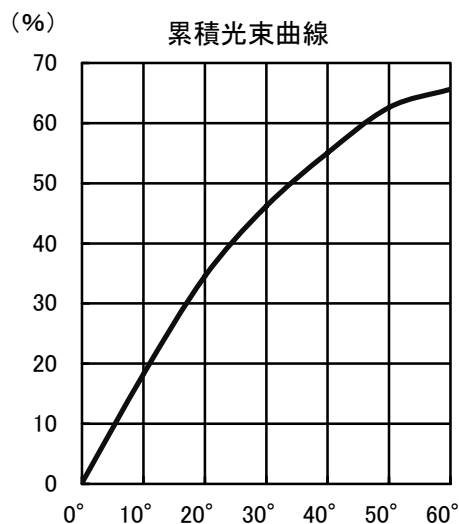

MT1001B+M1000BSC(R0)