

日立照明器具 照明特性

形式: MT1002B+H1000

<中角形・普及タイプ>

姿図



光源

品名	透明水銀ランプ
形式	H1000
光束	55,000 lm

ビーム特性




ビーム効率	1/10°-ム効率	45.0%
	30° 効率	22.1%
	60° 効率	46.7%
	90° 効率	63.5%

ビームの開き(1/10°-ム角)	57.5°
中心光度 (cd/1000 lm)	2,640

保守率	良	0.78
	中	0.74
	否	0.70

光度 (cd/1000 lm)

0°	2640	25°	342
1°	2290	30°	243
2°	2042	35°	187
3°	1797	40°	144
4°	1672	45°	124
5°	1480	50°	78
6°	1368	55°	47
7°	1332	60°	17
8°	1178	65°	8
9°	1052	70°	8
10°	956	75°	4
11°	850	80°	1
12°	813	85°	1
13°	762	90°	
14°	716		
15°	650		
16°	646		
17°	578		
18°	543		
19°	465		
20°	451		

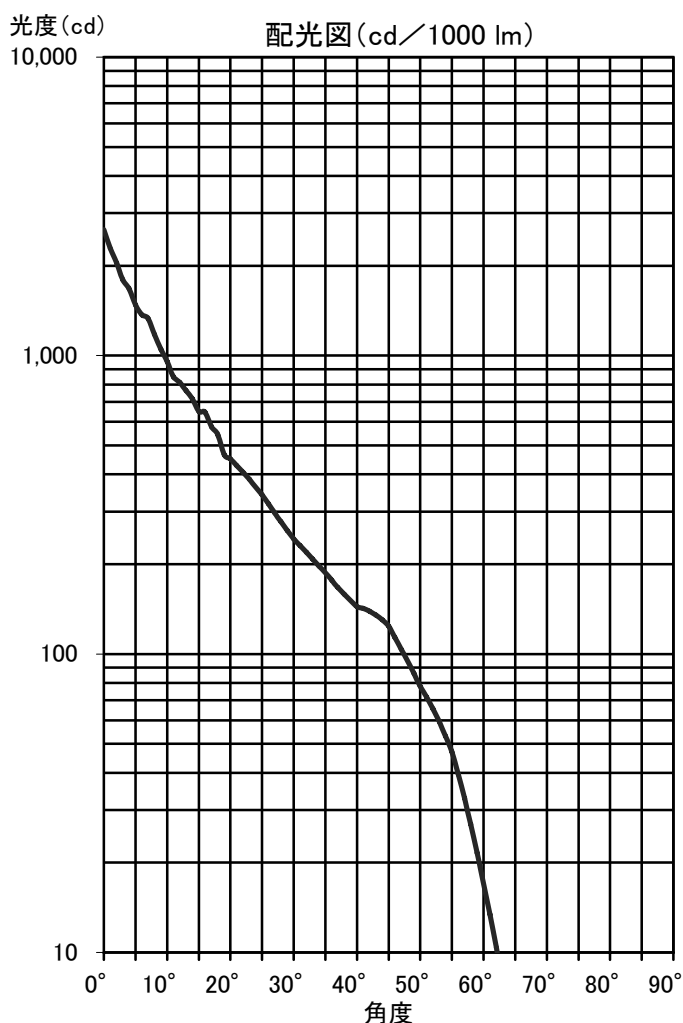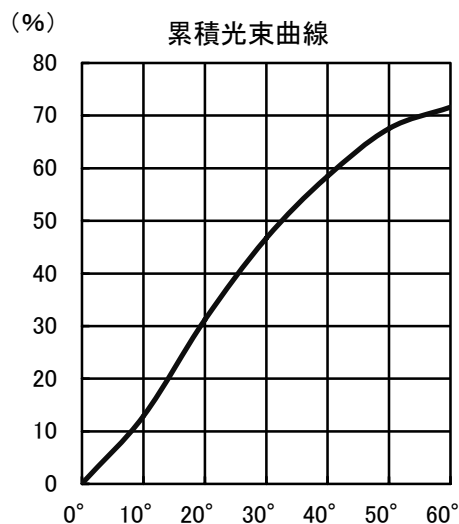

MT1002B+H1000(R0)