

日立照明器具 照明特性

形式: MT1002B+M1000BSC

<中角形・普及タイプ>

姿図



光源

品名	メタルハライドランプ・SC(透明)
形式	M1000B/BH-SC
光束	103,600 lm

ビーム特性




ビーム効率	1/10°-ム効率	42.9%
	30° 効率	25.1%
	60° 効率	47.5%
	90° 効率	62.8%

ビームの開き(1/10°-ム角)	52.5°
中心光度 (cd/1000 lm)	2,700

保守率	良	0.69
	中	0.66
	否	0.62

光度 (cd/1000 lm)

0°	2700	25°	295
1°	2420	30°	210
2°	2240	35°	165
3°	2110	40°	140
4°	1960	45°	115
5°	1750	50°	80
6°	1600	55°	40
7°	1510	60°	8
8°	1355	65°	5
9°	1230	70°	3
10°	1120	75°	2
11°	1010	80°	1
12°	918	85°	1
13°	825	90°	
14°	740		
15°	668		
16°	634		
17°	555		
18°	510		
19°	456		
20°	420		

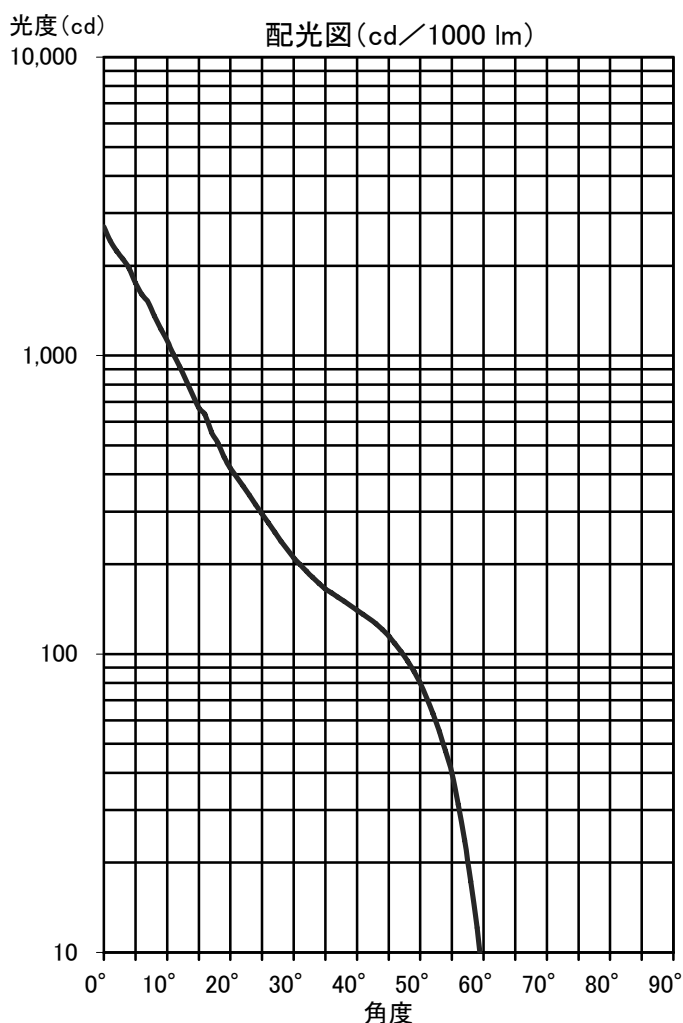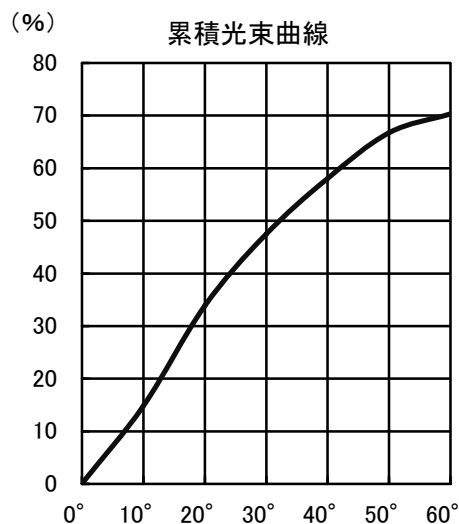

MT1002B+M1000BSC(R0)