

日立照明器具 照明特性

形式: MT1004B+H1000

<中角形・高級タイプ>

姿図



光源

品名	透明水銀ランプ
形式	H1000
光束	55,000 lm

ビーム特性




ビーム効率	1/10°-ム効率	45.0%
	30° 効率	26.0%
	60° 効率	50.5%
	90° 効率	67.2%

ビームの開き(1/10°-ム角)	52.0°
中心光度 (cd/1000 lm)	3,060

保守率	良	0.78
	中	0.74
	否	0.70

光度 (cd/1000 lm)

0°	3060	25°	330
1°	2890	30°	232
2°	2640	35°	186
3°	2290	40°	149
4°	2050	45°	119
5°	1850	50°	74
6°	1690	55°	46
7°	1540	60°	13
8°	1390	65°	5
9°	1260	70°	3
10°	1150	75°	2
11°	990	80°	1
12°	932	85°	1
13°	842	90°	
14°	765		
15°	689		
16°	642		
17°	582		
18°	538		
19°	510		
20°	462		

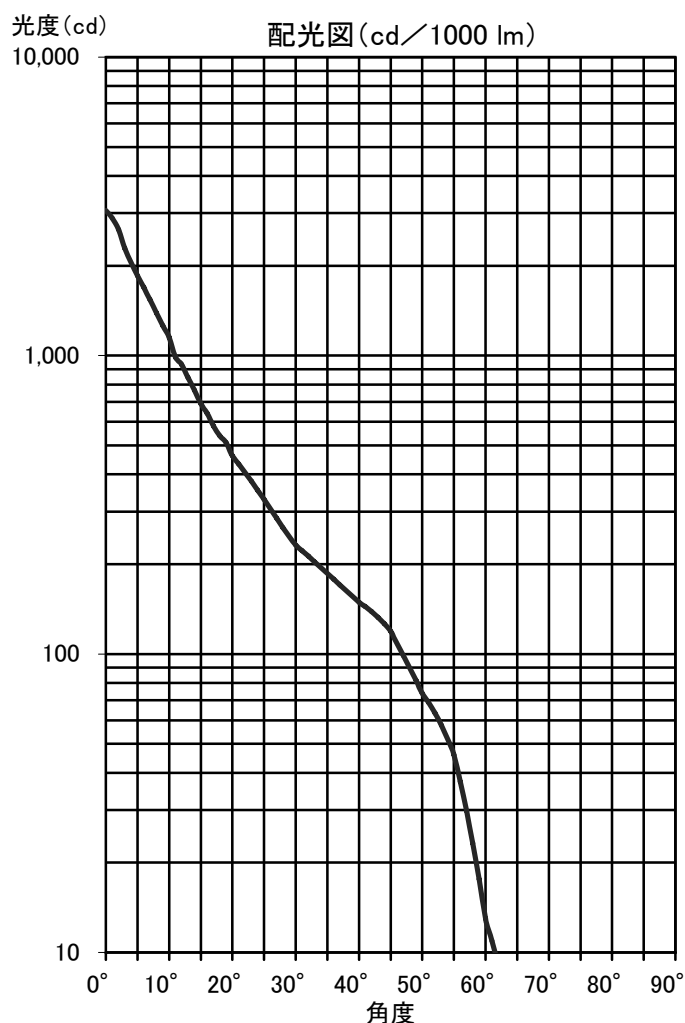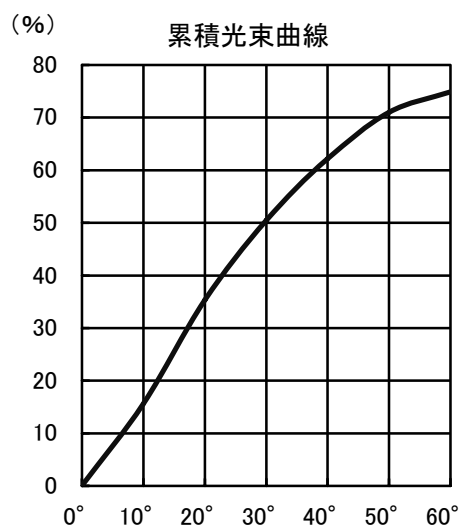

MT1004B+H1000(R0)