

日立照明器具 照明特性

形式: MT4011A+H400

<狭角形・重耐塩耐食形(アルミ反射板)>

姿図



光源

品名	透明水銀ランプ
形式	H400
光束	20,500 lm

ビーム特性

ビーム効率	1/10°-ム効率	30.1%
	30° 効率	36.6%
	60° 効率	58.2%
	90° 効率	68.1%




ビームの開き(1/10°-ム角) 24.6°

中心光度 (cd/1000 lm) 10,500

保守率	良	0.78
	中	0.74
	否	0.70

光度 (cd/1000 lm)

0°	10500	25°	234
1°	8810	30°	138
2°	6540	35°	101
3°	4660	40°	89
4°	3280	45°	86
5°	2760	50°	73
6°	2310	55°	42
7°	2040	60°	19
8°	1740	65°	4
9°	1590	70°	2
10°	1350	75°	
11°	1220	80°	
12°	1100	85°	
13°	965	90°	
14°	908		
15°	842		
16°	748		
17°	509		
18°	604		
19°	534		
20°	477		

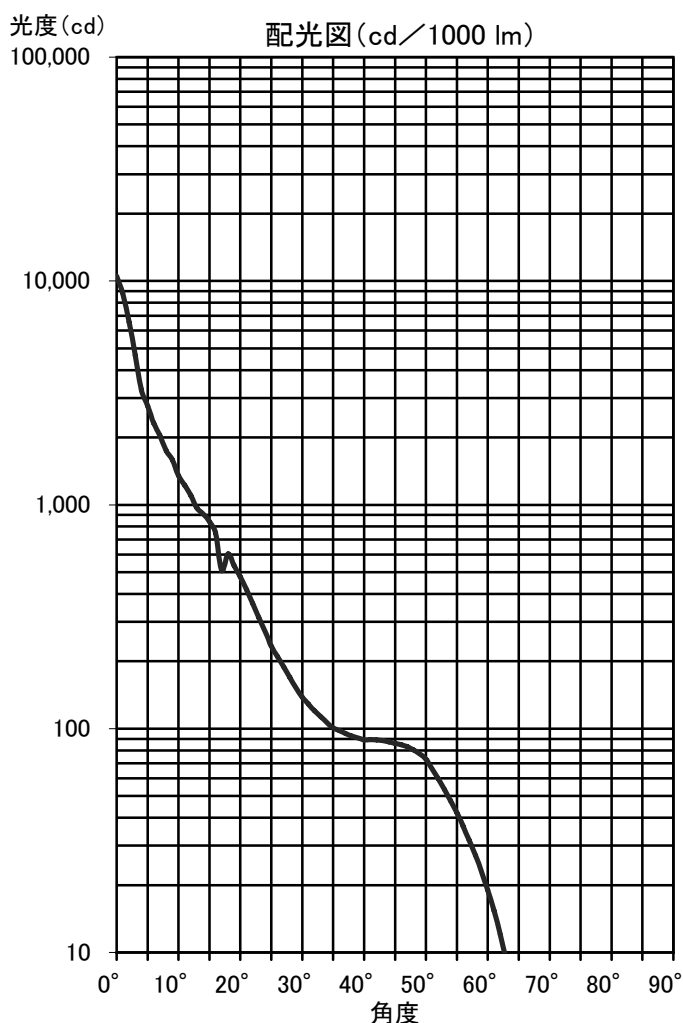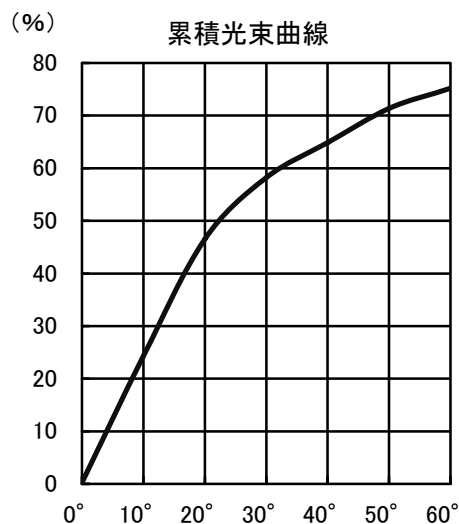

MT4011A+H400(R0)