

日立照明器具 照明特性

形式: MT4011A+HF250X

<広角形・重耐塩耐食形(アルミ反射板)>

姿図



光源

品名	蛍光水銀ランプ
形式	HF250X
光束	12,700 lm

ビーム特性




ビーム効率	1/10ビーム効率	57.2%
	30° 効率	24.2%
	60° 効率	53.5%
	90° 効率	64.9%

ビームの開き(1/10ビーム角)	66.6°
中心光度 (cd/1000 lm)	1,520

保守率	良	0.78
	中	0.74
	否	0.70

光度 (cd/1000 lm)

0°	1520	25°	375
1°		30°	222
2°		35°	126
3°		40°	87
4°		45°	71
5°	1330	50°	49
6°		55°	30
7°		60°	11
8°		65°	5
9°		70°	2
10°	1140	75°	
11°		80°	
12°		85°	
13°		90°	
14°			
15°	858		
16°			
17°			
18°			
19°			
20°	610		

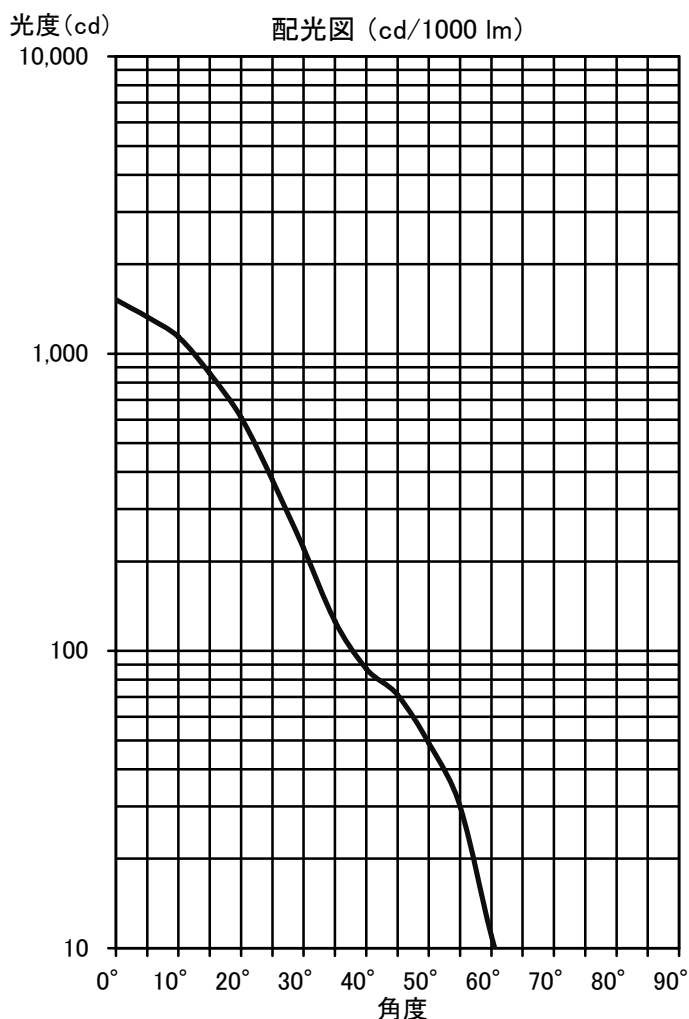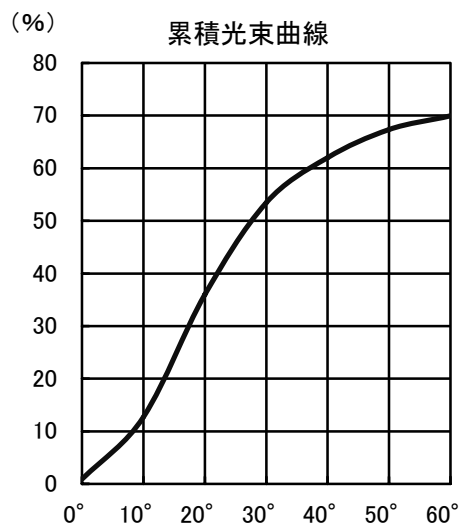

MT4011A+HF250X(R0)