

日立照明器具 照明特性

形式: MT4011A+HF400X

<広角形・重耐塩耐食形(アルミ反射板)>

姿図



光源

品名	蛍光水銀ランプ
形式	HF400X
光束	22,000 lm

ビーム特性

ビーム効率	1/10°-ム効率	66.2%
	30° 効率	16.3%
	60° 効率	46.8%
	90° 効率	65.4%




ビームの開き(1/10°-ム角) 93.2°

中心光度 (cd/1000 lm) 834

保守率	良	0.78
	中	0.74
	否	0.70

光度 (cd/1000 lm)

0°	834	25°	437
1°		30°	355
2°		35°	226
3°		40°	136
4°		45°	94
5°	804	50°	65
6°		55°	47
7°		60°	30
8°		65°	18
9°		70°	9
10°	748	75°	
11°		80°	
12°		85°	
13°		90°	
14°			
15°	680		
16°			
17°			
18°			
19°			
20°	571		

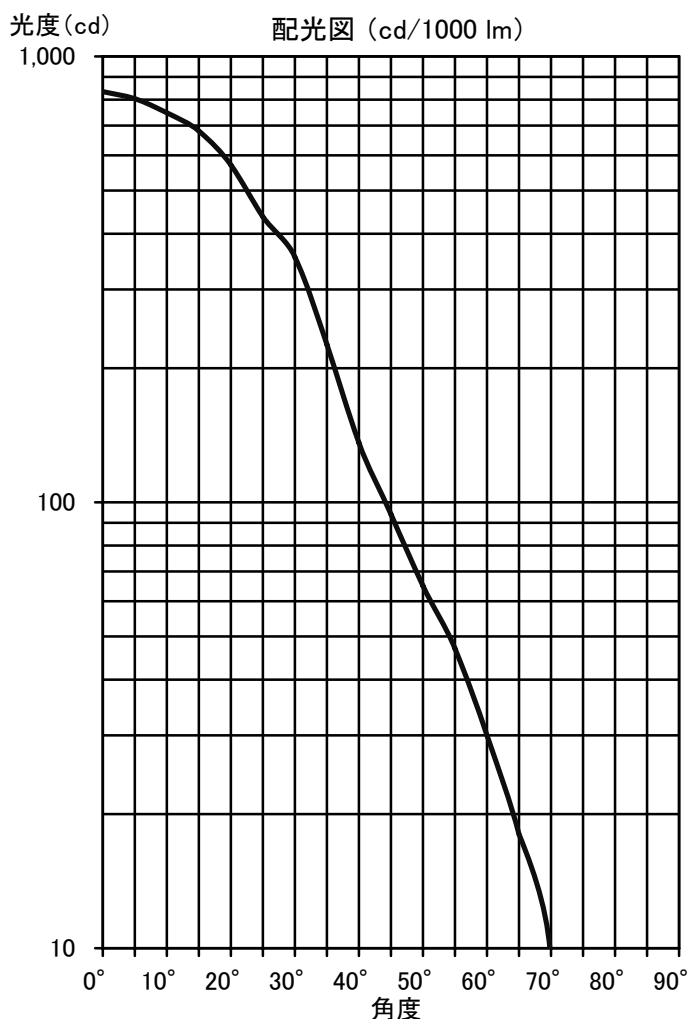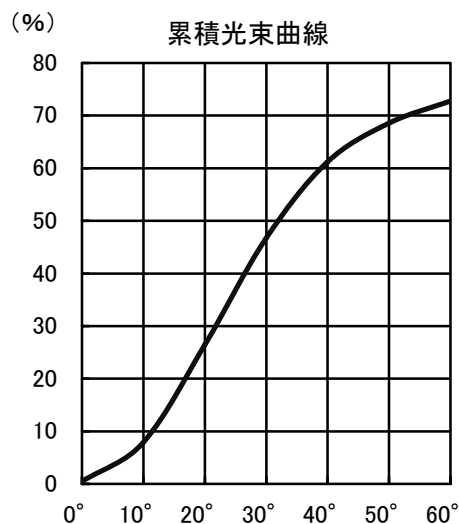

MT4011A+HF400X(R0)