

## 日立照明器具 照明特性

形式: MT4011A+NH180L

<狭角形・重耐塩耐食形(アルミ反射板)>

姿図



### 光源

|    |                |
|----|----------------|
| 品名 | 高圧ナトリウムランプ(透明) |
| 形式 | NH180L         |
| 光束 | 20,000 lm      |

### ビーム特性




|       |            |       |
|-------|------------|-------|
| ビーム効率 | 1/10°-光束効率 | 28.1% |
|       | 30° 効率     | 43.9% |
|       | 60° 効率     | 59.4% |
|       | 90° 効率     | 67.5% |

|                   |        |
|-------------------|--------|
| ビームの開き(1/10°-光束角) | 16.0°  |
| 中心光度 (cd/1000 lm) | 18,200 |

|     |   |      |
|-----|---|------|
| 保守率 | 良 | 0.83 |
|     | 中 | 0.79 |
|     | 否 | 0.75 |

### 光度 (cd/1000 lm)

|     |       |     |     |
|-----|-------|-----|-----|
| 0°  | 18200 | 25° | 161 |
| 1°  | 15600 | 30° | 87  |
| 2°  | 12400 | 35° | 81  |
| 3°  | 7440  | 40° | 78  |
| 4°  | 5250  | 45° | 78  |
| 5°  | 4080  | 50° | 49  |
| 6°  | 2970  | 55° | 10  |
| 7°  | 2270  | 60° | 2   |
| 8°  | 1820  | 65° | 1   |
| 9°  | 1540  | 70° | 1   |
| 10° | 1290  | 75° |     |
| 11° | 1080  | 80° |     |
| 12° | 919   | 85° |     |
| 13° | 839   | 90° |     |
| 14° | 735   |     |     |
| 15° | 625   |     |     |
| 16° | 547   |     |     |
| 17° | 487   |     |     |
| 18° | 423   |     |     |
| 19° | 380   |     |     |
| 20° | 334   |     |     |

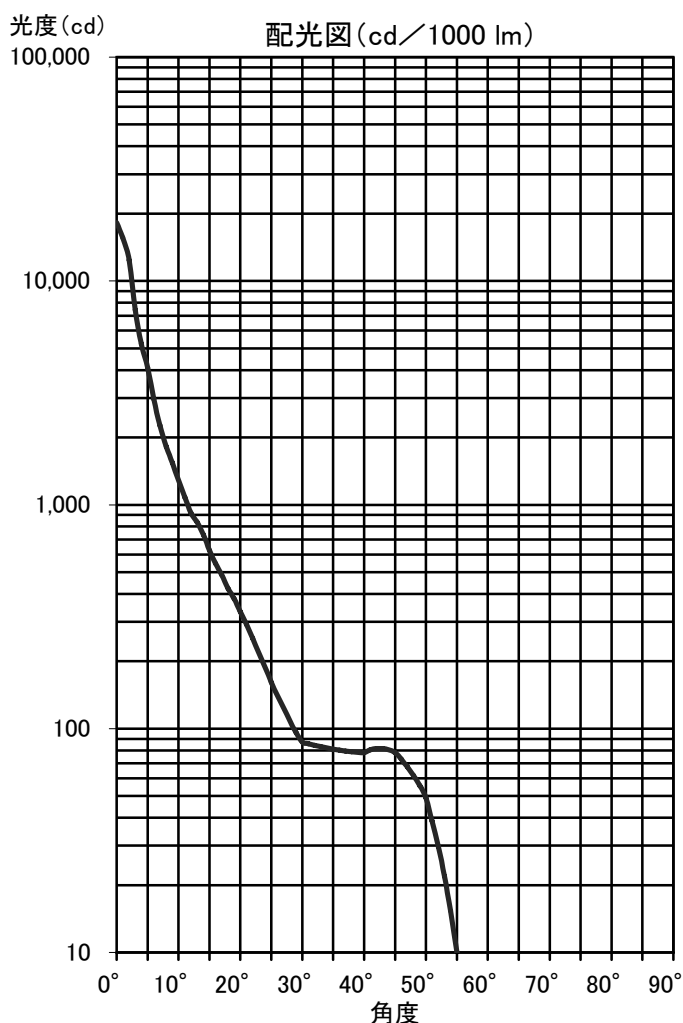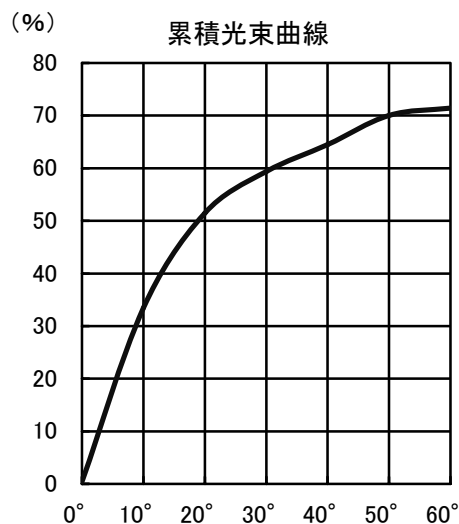

MT4011A+NH180L(R0)