

日立照明器具 照明特性

形式: MT4013A+HF400X

<広角形・重耐塩耐食形(ステンレス反射板)>

姿図



光源

品名	蛍光水銀ランプ
形式	HF400X
光束	22,000 lm

ビーム特性




ビーム効率	1/10°-ム効率	60.9%
	30° 効率	19.7%
	60° 効率	49.8%
	90° 効率	65.3%

ビームの開き(1/10°-ム角)	78.0°
中心光度 (cd/1000 lm)	1,250

保守率	良	0.78
	中	0.74
	否	0.70

光度 (cd/1000 lm)

0°	1250	25°	425
1°		30°	296
2°		35°	185
3°		40°	114
4°		45°	83
5°	1110	50°	63
6°		55°	35
7°		60°	20
8°		65°	9
9°		70°	2
10°	877	75°	1
11°		80°	
12°		85°	
13°		90°	
14°			
15°	740		
16°			
17°			
18°			
19°			
20°	585		

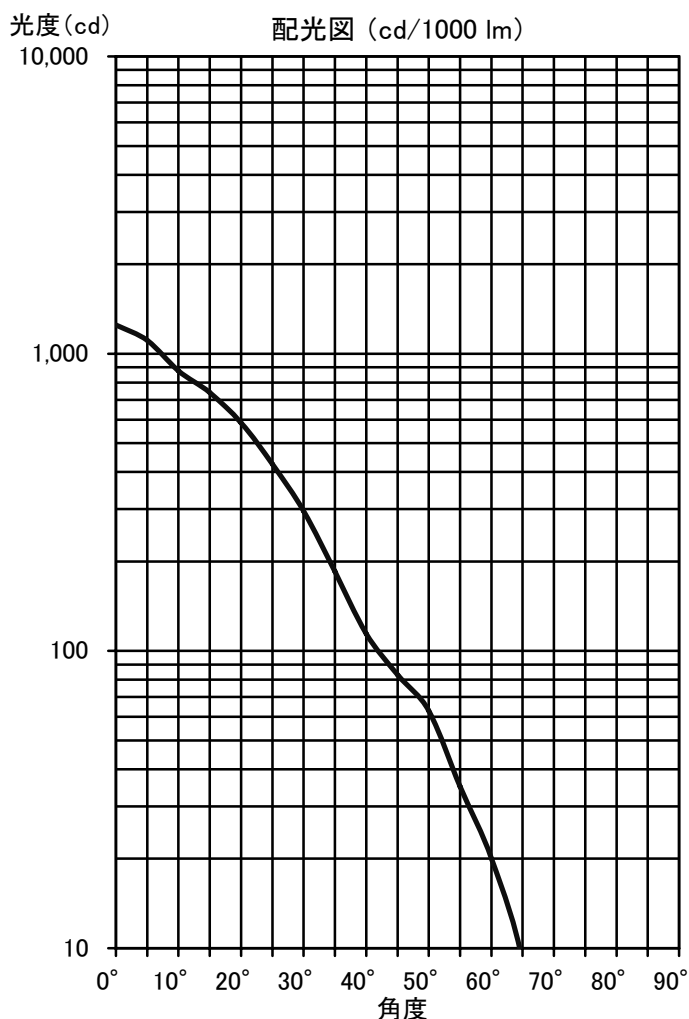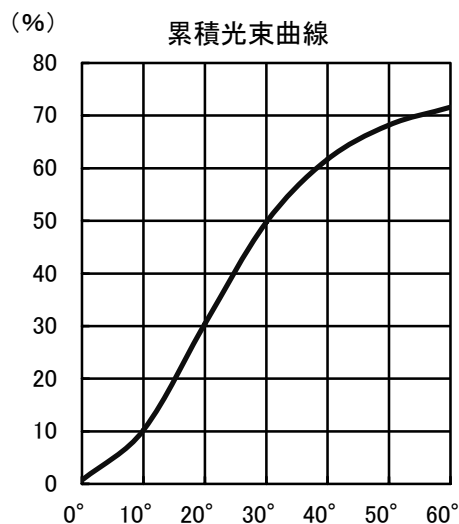

MT4013A+HF400X(R0)