

日立照明器具 照明特性

形式: MT4013A+NH360FL

<広角形・重耐塩耐食形(ステンレス反射板)>

姿図



光源

品名	高圧ナトリウムランプ(拡散)
形式	NH360FL
光束	47,500 lm

ビーム特性




ビーム効率	1/10ビーム効率	61.2%
	30° 効率	20.9%
	60° 効率	51.2%
	90° 効率	66.6%

ビームの開き(1/10ビーム角)	75.4°
中心光度 (cd/1000 lm)	1,450

保守率	良	0.83
	中	0.79
	否	0.75

光度 (cd/1000 lm)

0°	1450	25°	445
1°		30°	281
2°		35°	191
3°		40°	115
4°		45°	80
5°	1110	50°	58
6°		55°	32
7°		60°	18
8°		65°	8
9°		70°	3
10°	988	75°	1
11°		80°	
12°		85°	
13°		90°	
14°			
15°	745		
16°			
17°			
18°			
19°			
20°	578		

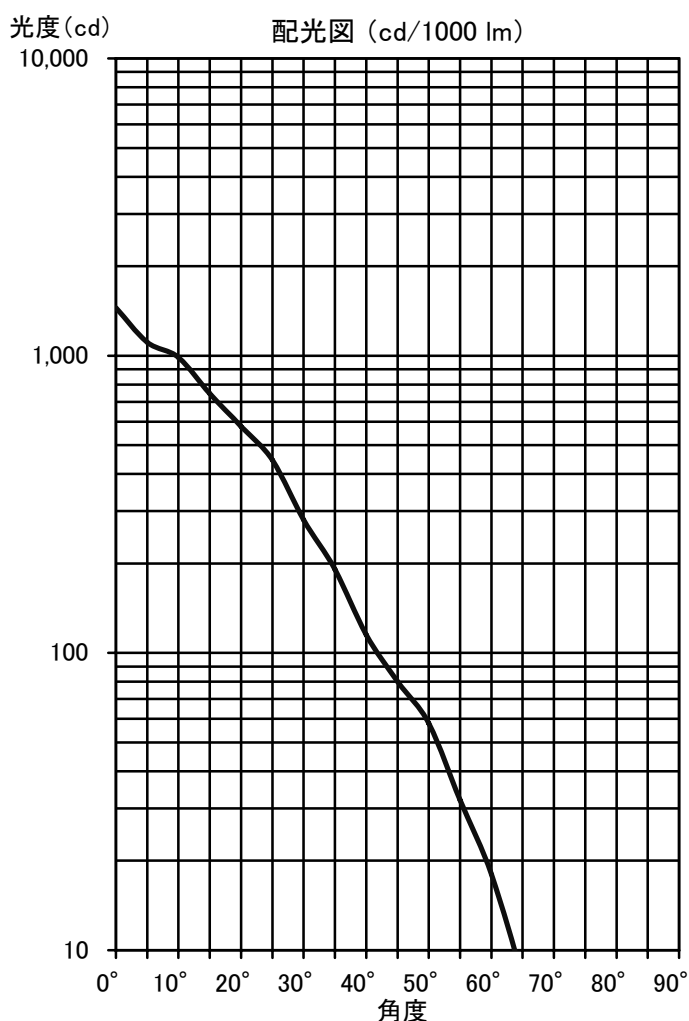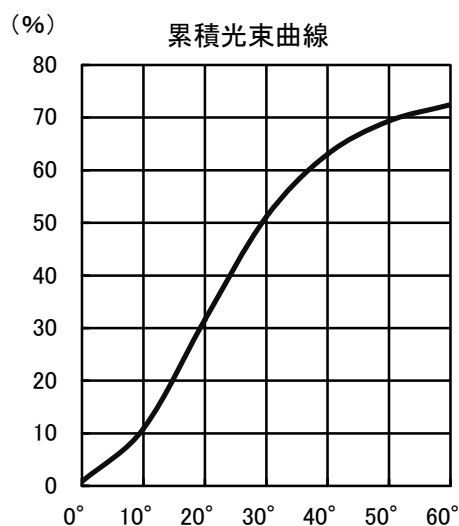

MT4013A+NH360FL(R0)