

日立照明器具 照明特性

形式: MT402B+H400

<中角形・普及タイプ>

姿図



光源

品名 透明水銀ランプ

形式 H400

光束 20,500 lm

ビーム特性

ビーム 効率	1/10ビーム効率	42.2%
	30° 効率	24.1%
	60° 効率	46.2%
	90° 効率	60.6%




ビームの開き(1/10ビーム角) 52.7°

中心光度 (cd/1000 lm) 2,450

保守率	良	0.78
	中	0.74
	否	0.70

光度 (cd/1000 lm)

0°	2450	25°	274
1°	2240	30°	185
2°	2130	35°	146
3°	2040	40°	137
4°	1850	45°	123
5°	1660	50°	92
6°	1560	55°	54
7°	1405	60°	15
8°	1296	65°	5
9°	1166	70°	3
10°	1090	75°	2
11°	958	80°	1
12°	878	85°	1
13°	810	90°	
14°	718		
15°	678		
16°	624		
17°	580		
18°	537		
19°	486		
20°	448		

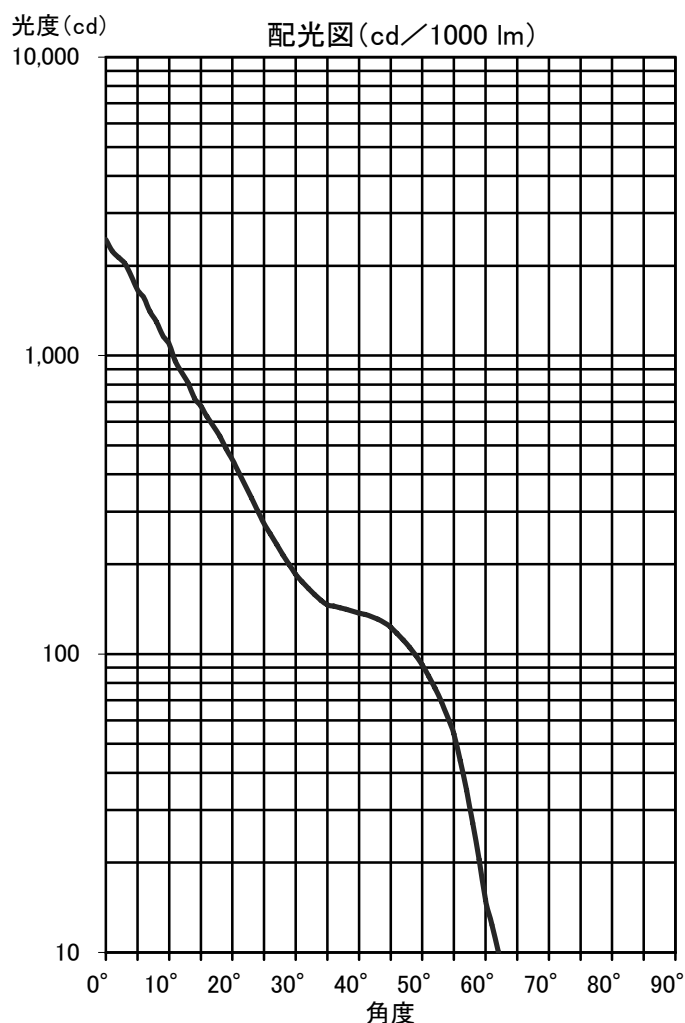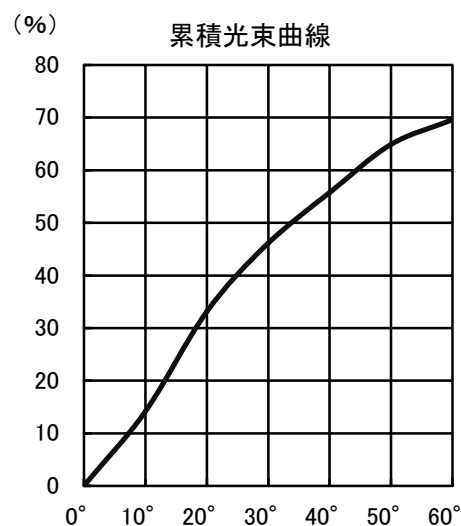

MT402B+H400(R0)