


日立照明器具 照明特性

形式: MTE0903MN 〈水銀ランプ 250ワ〉 〈ビームの開き: 90度〉	反 射 率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
			照明率 S/H=1.0													
姿図 	室指数	0.6	0.65	0.55	0.49	0.64	0.55	0.48	0.44	0.54	0.48	0.44	0.53	0.48	0.44	0.42
		0.8	0.75	0.66	0.60	0.74	0.66	0.59	0.55	0.64	0.59	0.55	0.63	0.58	0.55	0.53
		1	0.82	0.73	0.67	0.80	0.73	0.67	0.63	0.71	0.66	0.62	0.70	0.66	0.62	0.60
		1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67
		1.5	0.91	0.85	0.80	0.90	0.84	0.79	0.75	0.82	0.78	0.75	0.81	0.77	0.74	0.72
		2	0.96	0.91	0.86	0.94	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.79
		2.5	0.98	0.94	0.90	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82
		3	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.91	0.88	0.91	0.89	0.87	0.85
		4	1.02	0.99	0.96	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.88
		5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91
光源																
品名	LED															
形式	LED															
光束	8,880 lm															

器具効率 Ft= 100.0%
 上方光束 Fu= 0.0%
 下方光束 Fd= 100.0%

配光分類

BZ-

最大取付間隔

A-A 1.40 H


B-B H

保守率	良	0.79
	中	0.75
	否	0.71

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	374		
10	420		
20	496		
30	380		
40	296		
50	233		
60	107		
70	11		
80	1		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

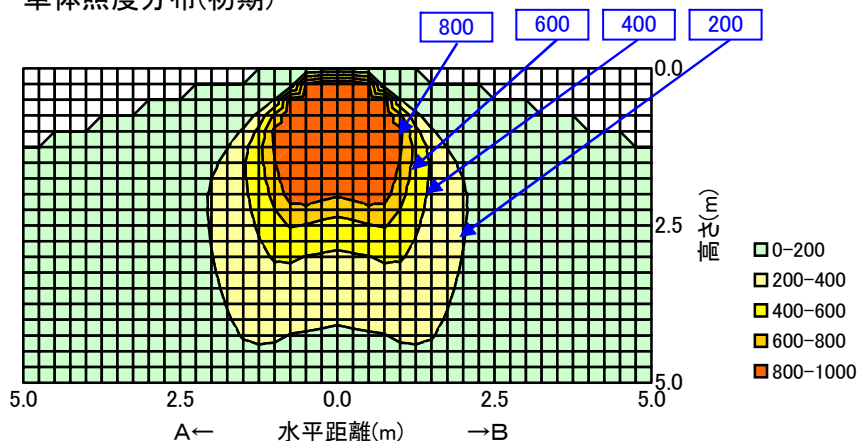

配光曲線

