



日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: MTE0903NN-J14B	室指数	固有照明率 S/H=1.0														
＜備考＞水銀ランプ250クラス ビームの開き角: 60° 姿図 	0.6	0.80	0.73	0.69	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64	
	0.8	0.87	0.81	0.77	0.86	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.73	0.72	
	1	0.92	0.86	0.82	0.91	0.86	0.82	0.79	0.85	0.81	0.79	0.84	0.81	0.78	0.77	
	1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.88	0.85	0.83	0.87	0.85	0.83	0.81	
	1.5	0.98	0.93	0.90	0.97	0.93	0.90	0.87	0.91	0.89	0.87	0.90	0.88	0.86	0.84	
	2	1.01	0.97	0.94	1.00	0.96	0.94	0.92	0.95	0.93	0.91	0.93	0.92	0.90	0.88	
	2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.94	0.92	0.90	
	3	1.03	1.00	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.91	
	4	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.98	0.97	0.96	0.93	
	光源形式	5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95
LED	7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97	
器具光束	10	1.08	1.07	1.06	1.07	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.02	1.01	0.99	
10,800 lm																

器具効率 Ft= 100%					
上方光束 Fu= 0.0%					
下方光束 Fd= 100.0%					
最大取付間隔					
A-A 0.94		H			
B-B		H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	941				
10	940				
20	764				
30	496				
40	225				
50	77				
60	17				
70	5				
80	2				
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布 (初期値)

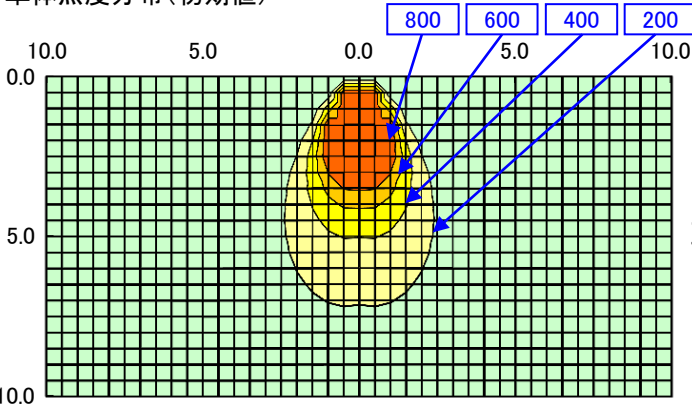

10.0 5.0 0.0 5.0 10.0


0.0 5.0 10.0

A← 水平距離(m) →B

単位: m

0-200
200-400
400-600
600-800
800-1000

配光曲線
(cd/1000 lm)

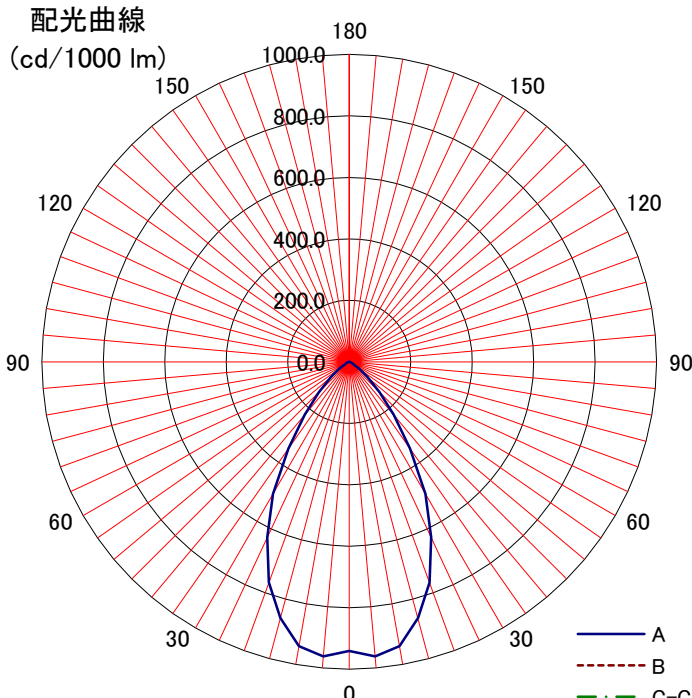

180 150 120 90 60 30 0

1000.0 800.0 600.0 400.0 200.0 0.0

A
B
C-C'