


日立照明器具 照明特性

形式: MTE0903NN		天井	80%			70%				50%			30%			0%
<水銀ランプ 250ワ> <ビームの開き:60度>		反射率	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		壁	10%													
		床	10%													
		室指数	照明率 S/H=1.0													
姿図 	光源	0.6	0.80	0.73	0.69	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64
		0.8	0.87	0.81	0.77	0.87	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.73	0.72
		1	0.92	0.86	0.82	0.91	0.86	0.82	0.79	0.85	0.81	0.79	0.84	0.81	0.78	0.77
		1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.88	0.86	0.83	0.87	0.85	0.83	0.81
		1.5	0.98	0.93	0.90	0.97	0.93	0.90	0.87	0.91	0.89	0.87	0.90	0.88	0.86	0.84
		2	1.01	0.97	0.95	1.00	0.96	0.94	0.92	0.95	0.93	0.91	0.94	0.92	0.90	0.88
		2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.94	0.92	0.90
		3	1.03	1.00	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.91
		4	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.98	0.97	0.96	0.93
		5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95
品名	LED	7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97
形式	LED	10	1.08	1.07	1.06	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.01	0.99
光束	9,300 lm															

器具効率 Ft= 100.0%
 上方光束 Fu= 0.0%
 下方光束 Fd= 100.0%

配光分類
BZ-

最大取付間隔


A-A 0.94 H
 B-B 0.02 H

保守率	良	0.79
	中	0.75
	否	0.71

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	941		
10	940		
20	764		
30	496		
40	225		
50	77		
60	17		
70	5		
80	2		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

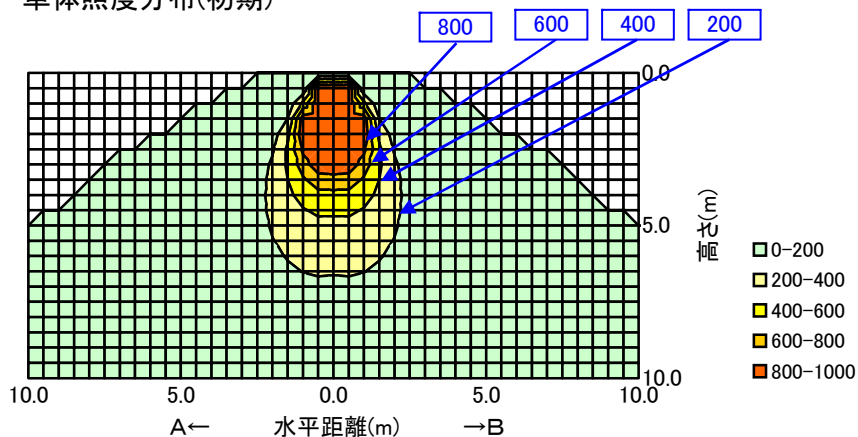

配光曲線

