
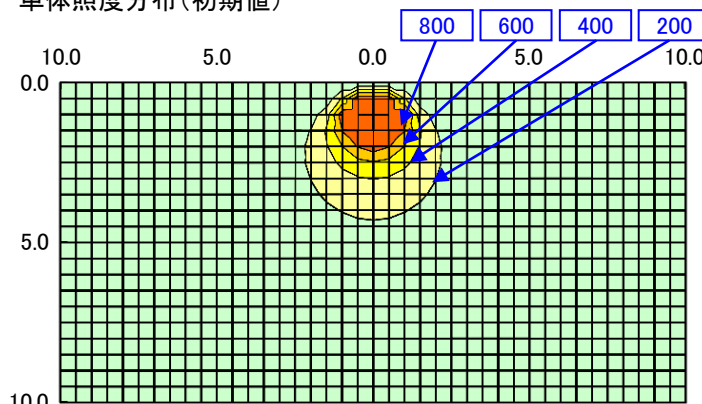
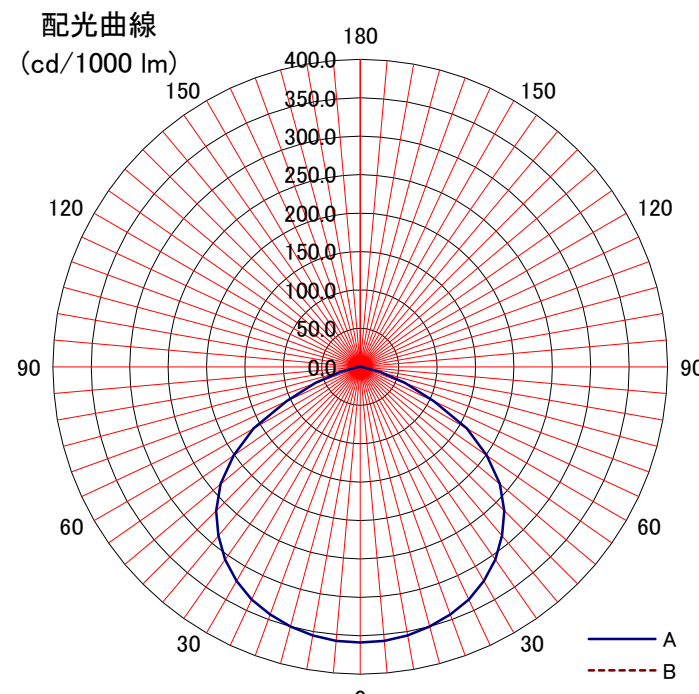


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%													0%																																																																																																																							
形式: MTE0903WN-Z14B	室指数	固有照明率 S/H=1.0																																																																																																																																					
＜備考＞ 水銀ランプ250クラス ビームの開き角:110°	0.6	0.60	0.48	0.41	0.59	0.48	0.40	0.35	0.47	0.40	0.35	0.46	0.40	0.35	0.33																																																																																																																								
	0.8	0.70	0.59	0.52	0.69	0.58	0.51	0.46	0.57	0.51	0.46	0.56	0.50	0.46	0.44																																																																																																																								
姿図 	1	0.77	0.67	0.60	0.75	0.66	0.59	0.54	0.64	0.58	0.54	0.63	0.58	0.53	0.51																																																																																																																								
	1.25	0.83	0.74	0.67	0.81	0.73	0.67	0.62	0.71	0.66	0.61	0.70	0.65	0.61	0.59																																																																																																																								
	1.5	0.87	0.79	0.73	0.86	0.78	0.73	0.68	0.77	0.72	0.67	0.75	0.71	0.67	0.65																																																																																																																								
	2	0.93	0.86	0.81	0.91	0.85	0.80	0.76	0.83	0.79	0.76	0.82	0.78	0.75	0.73																																																																																																																								
	2.5	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.84	0.81	0.85	0.82	0.80	0.77																																																																																																																								
	3	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.80																																																																																																																								
	4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85																																																																																																																								
光源形式	4	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85																																																																																																																								
LED	5	1.02	0.99	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.88																																																																																																																								
器具光束	7	1.05	1.02	1.00	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92																																																																																																																								
10,260 lm	10	1.06	1.05	1.04	1.05	1.04	1.02	1.01	1.02	1.00	1.00	0.99	0.99	0.98	0.95																																																																																																																								
器具効率 Ft= 100%		単体照度分布 (初期値) 																																																																																																																																					
上方光束 Fu= 0.0%																																																																																																																																							
下方光束 Fd= 100.0%																																																																																																																																							
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																					
A-A 1.34 H																																																																																																																																							
B-B H																																																																																																																																							
保守率																																																																																																																																							
良	0.81																																																																																																																																						
中	0.79																																																																																																																																						
否	0.75																																																																																																																																						
光度 (cd/1000 lm)		<table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>359</td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td>355</td><td></td><td></td><td></td><td></td></tr><tr><td>20</td><td>343</td><td></td><td></td><td></td><td></td></tr><tr><td>30</td><td>322</td><td></td><td></td><td></td><td></td></tr><tr><td>40</td><td>287</td><td></td><td></td><td></td><td></td></tr><tr><td>50</td><td>237</td><td></td><td></td><td></td><td></td></tr><tr><td>60</td><td>160</td><td></td><td></td><td></td><td></td></tr><tr><td>70</td><td>62</td><td></td><td></td><td></td><td></td></tr><tr><td>80</td><td>5</td><td></td><td></td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>															A-0	B-B	C-0	A'-0	C'-0	0	359					10	355					20	343					30	322					40	287					50	237					60	160					70	62					80	5					90						100						110						120						130						140						150						160						170						180					
	A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
0	359																																																																																																																																						
10	355																																																																																																																																						
20	343																																																																																																																																						
30	322																																																																																																																																						
40	287																																																																																																																																						
50	237																																																																																																																																						
60	160																																																																																																																																						
70	62																																																																																																																																						
80	5																																																																																																																																						
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							