


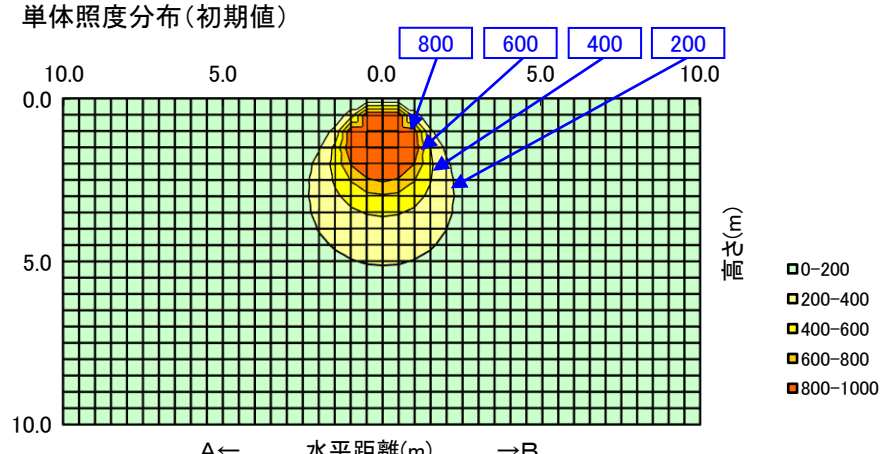


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: MTE11AMN-Z14A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(広角)	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
	0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51	
姿図 	1	0.80	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.64	0.60	0.68	0.64	0.60	0.58	
	1.25	0.86	0.78	0.72	0.84	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65	
	1.5	0.89	0.83	0.77	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.79	0.75	0.72	0.70	
	2	0.94	0.89	0.84	0.93	0.88	0.84	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76	
	2.5	0.97	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80	
	3	0.98	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.89	0.86	0.89	0.87	0.85	0.83	
光源形式 -	4	1.01	0.97	0.95	0.99	0.96	0.94	0.91	0.94	0.92	0.90	0.92	0.90	0.89	0.86	
	5	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.95	0.93	0.94	0.93	0.91	0.89	
器具光束 11,000 lm	7	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92	
	10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.95	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.24 H																
B-B 1.20 H																
保守率	良															0.81
	中															0.79
	否															0.75
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	476	476	476													
10	472	474	467													
20	447	448	447													
30	397	385	388													
40	308	282	288													
50	214	189	192													
60	105	93	89													
70	41	41	37													
80	13	12	14													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																



単体照度分布(初期値)

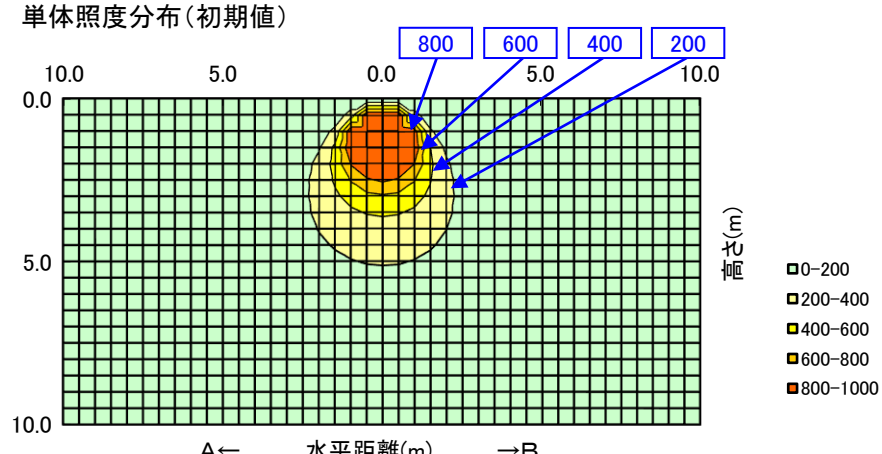

最大取付間隔

A-A 1.24 H

B-B 1.20 H

保守率


良 0.81

中 0.79


否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	476	476	476		
10	472	474	467		
20	447	448	447		
30	397	385	388		
40	308	282	288		
50	214	189	192		
60	105	93	89		
70	41	41	37		
80	13	12	14		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					



単体照度分布(初期値)

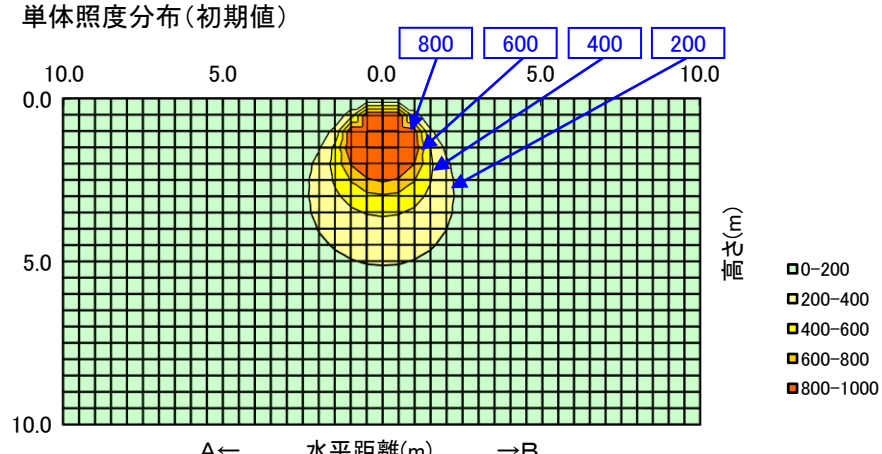

最大取付間隔

A-A 1.24 H

B-B 1.20 H

保守率


良 0.81

中 0.79


否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	476	476	476		
10	472	474	467		
20	447	448	447		
30	397	385	388		
40	308	282	288		
50	214	189	192		
60	105	93	89		
70	41	41	37		
80	13	12	14		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					



単体照度分布(初期値)

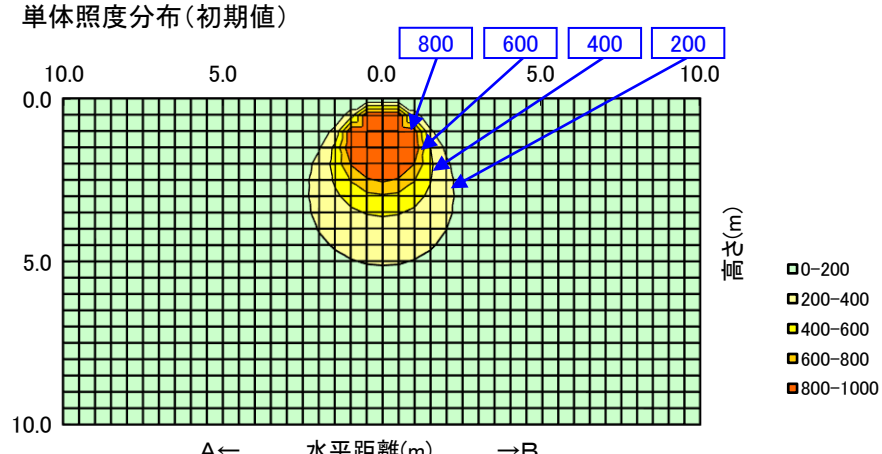

最大取付間隔

A-A 1.24 H

B-B 1.20 H

保守率


良 0.81

中 0.79


否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	476	476	476		
10	472	474	467		
20	447	448	447		
30	397	385	388		
40	308	282	288		
50	214	189	192		
60	105	93	89		
70	41	41	37		
80	13	12	14		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					



単体照度分布(初期値)

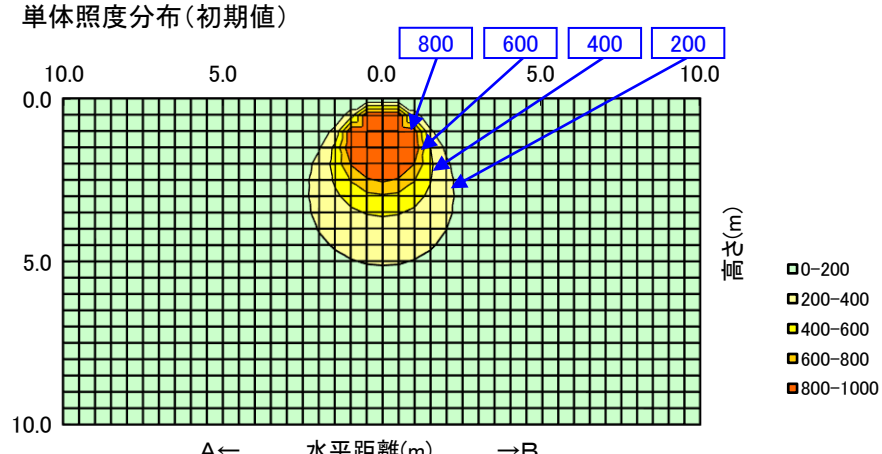

最大取付間隔

A-A 1.24 H

B-B 1.20 H

保守率


良 0.81

中 0.79


否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	476	476	476		
10	472	474	467		
20	447	448	447		
30	397	385	388		
40	308	282	288		
50	214	189	192		
60	105	93	89		
70	41	41	37		
80	13	12	14		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					



単体照度分布(初期値)

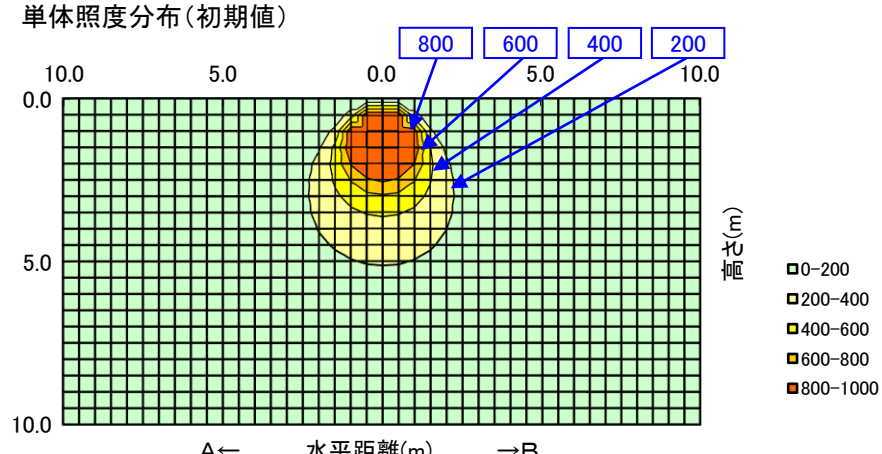

最大取付間隔

A-A 1.24 H

B-B 1.20 H

保守率


良 0.81

中 0.79


否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	476	476	476		
10	472	474	467		
20	447	448	447		
30	397	385	388		
40	308	282	288		
50	214	189	192		
60	105	93	89		
70	41	41	37		
80	13	12	14		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					



単体照度分布(初期値)

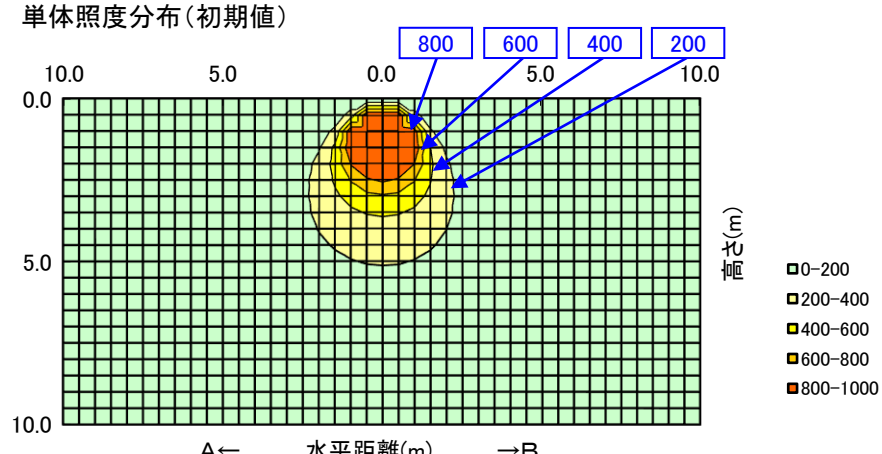

最大取付間隔

A-A 1.24 H

B-B 1.20 H

保守率


良 0.81

中 0.79


否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	476	476	476		
10	472	474	467		
20	447	448	447		
30	397	385	388		
40	308	282	288		
50	214	189	192		
60	105	93	89		
70	41	41	37		
80	13	12	14		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					



単体照度分布(初期値)

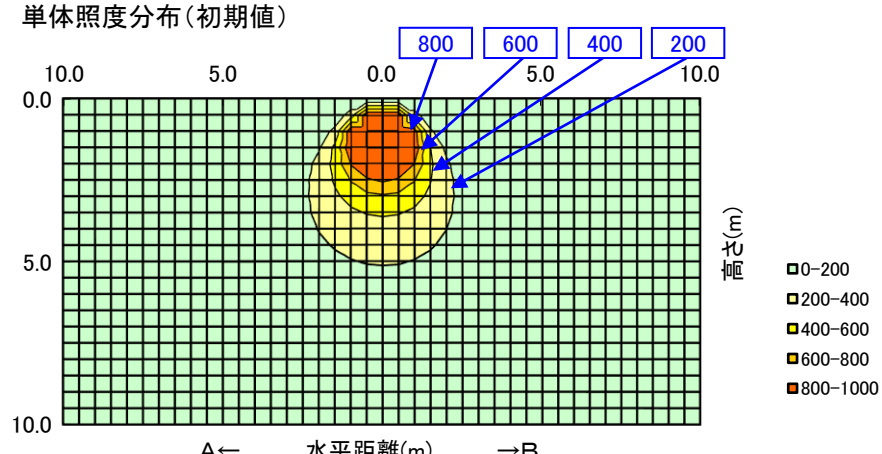

最大取付間隔

A-A 1.24 H

B-B 1.20 H

保守率


良 0.81

中 0.79


否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	476	476	476		
10	472	474	467		
20	447	448	447		
30	397	385	388		
40	308	282	288		
50	214	189	192		
60	105	93	89		
70	41	41	37		
80	13	12	14		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					



単体照度分布(初期値)

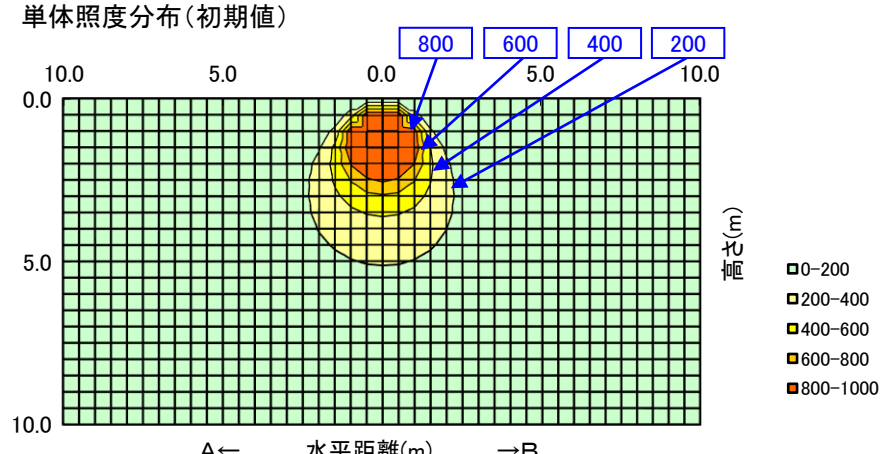

最大取付間隔

A-A 1.24 H

B-B 1.20 H

保守率


良 0.81

中 0.79


否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	476	476	476		
10	472	474	467		
20	447	448	447		
30	397	385	388		
40	308	282	288		
50	214	189	192		
60	105	93	89		
70	41	41	37		
80	13	12	14		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					



単体照度分布(初期値)

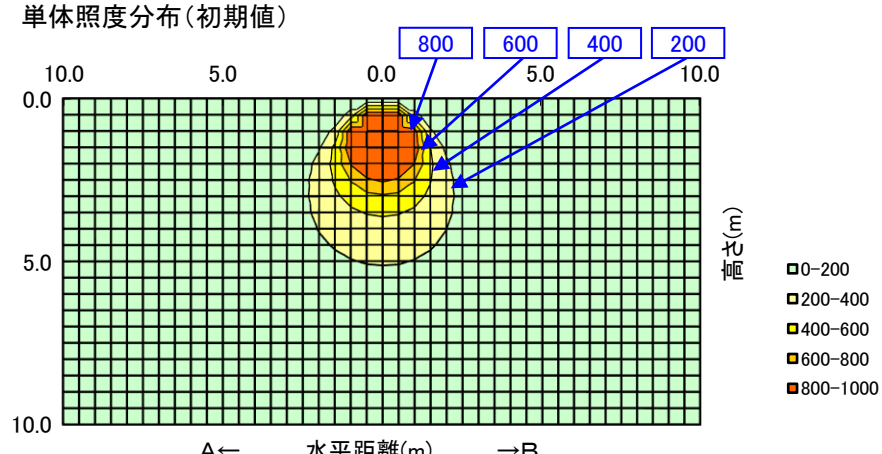

最大取付間隔

A-A 1.24 H

B-B 1.20 H

保守率

良 0.81

中 0.79

否 0.75

光度 (cd/1000 lm)

	A-0	B-B	C-0	A'-0	C'-0
0	476	476	476		
10	472	474	467		
20	447	448	447		
30	397	385	388		
40	308	282	288		
50	214	189	192		
60	105	93	89		
70	41	41	37		
80	13	12	14		