
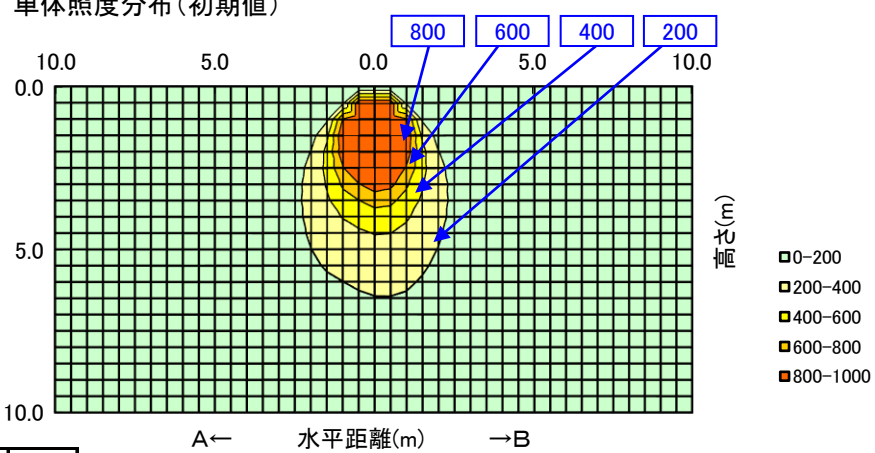
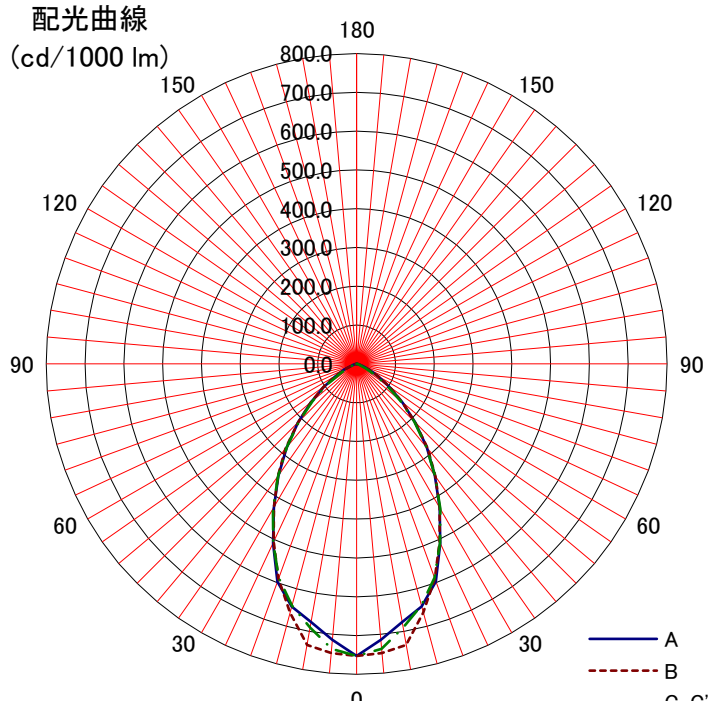


日立照明器具 照明特性

名称: 高天井用LED器具		天井	80%			70%				50%			30%			0%	
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: MTE11ANN-J14B		床	10%														0%
			室指数		固有照明率 S/H=1.0												
<備考>		0.6	0.72	0.63	0.58	0.71	0.63	0.57	0.54	0.62	0.57	0.54	0.61	0.57	0.53	0.52	
		0.8	0.81	0.73	0.68	0.80	0.72	0.67	0.64	0.71	0.67	0.63	0.70	0.66	0.63	0.61	
姿図 		1	0.86	0.79	0.74	0.85	0.78	0.74	0.70	0.77	0.73	0.70	0.76	0.72	0.69	0.68	
		1.25	0.91	0.84	0.80	0.90	0.84	0.79	0.76	0.82	0.78	0.75	0.81	0.78	0.75	0.73	
		1.5	0.94	0.88	0.84	0.93	0.88	0.84	0.80	0.86	0.83	0.80	0.85	0.82	0.79	0.77	
		2	0.98	0.93	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.86	0.89	0.87	0.85	0.83	
		2.5	1.00	0.96	0.93	0.99	0.95	0.92	0.90	0.93	0.91	0.89	0.92	0.90	0.88	0.86	
		3	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.88	
光源形式		4	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.96	0.94	0.96	0.94	0.93	0.90	
		5	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
器具光束 11,000 lm		7	1.06	1.05	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.99	0.98	0.95	
		10	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.97	
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		保守率 良 0.83 中 0.81 否 0.76															
A-A 0.94 H																	
B-B 0.94 H																	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 															
	A-0	B-B	C-0	A'-0	C'-0												
0	753	753	753														
10	675	736	690														
20	597	589	587														
30	427	427	431														
40	280	285	280														
50	155	155	148														
60	64	65	49														
70	16	15	11														
80	4	4	4														
90	1																
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	