
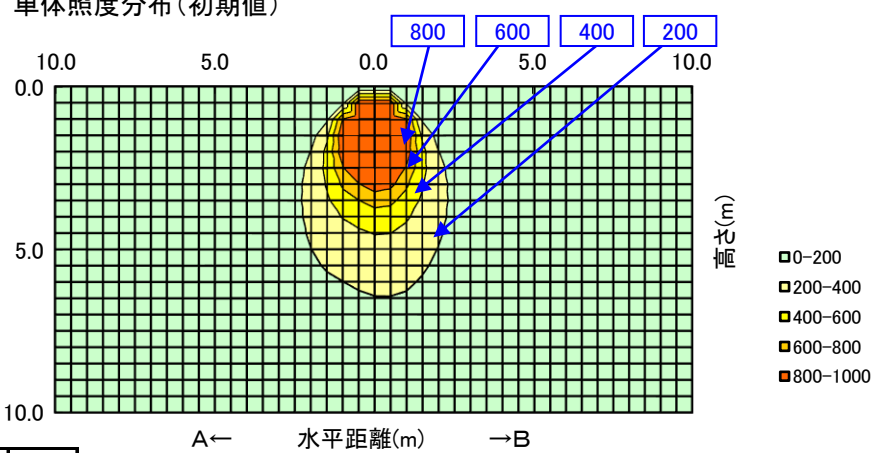


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: MTE11ANN-X14B	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.72	0.63	0.58	0.71	0.63	0.57	0.54	0.62	0.57	0.54	0.61	0.57	0.53	0.52	
	0.8	0.81	0.73	0.68	0.80	0.72	0.67	0.64	0.71	0.67	0.63	0.70	0.66	0.63	0.61	
姿図 	1	0.86	0.79	0.74	0.85	0.78	0.74	0.70	0.77	0.73	0.70	0.76	0.72	0.69	0.68	
	1.25	0.91	0.84	0.80	0.90	0.84	0.79	0.76	0.82	0.78	0.75	0.81	0.78	0.75	0.73	
	1.5	0.94	0.88	0.84	0.93	0.88	0.84	0.80	0.86	0.83	0.80	0.85	0.82	0.79	0.77	
	2	0.98	0.93	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.86	0.89	0.87	0.85	0.83	
	2.5	1.00	0.96	0.93	0.99	0.95	0.92	0.90	0.93	0.91	0.89	0.92	0.90	0.88	0.86	
	3	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.88	
	光源形式	4	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.96	0.94	0.96	0.94	0.93	0.90
-	5	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
器具光束 11,000 lm	7	1.06	1.05	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.99	0.98	0.95	
	10	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.97	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 0.94 H																
B-B 0.94 H																
保守率	良	0.83														
	中	0.81														
	否	0.76														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	753	753	753													
10	675	736	690													
20	597	589	587													
30	427	427	431													
40	280	285	280													
50	155	155	148													
60	64	65	49													
70	16	15	11													
80	4	4	4													
90	1															
100																
110																
120																
130																
140																
150																
160																
170																
180																

配光曲線 (cd/1000 lm)		180		150		120		90		60		30		0		A		B		C-C'	
		800.0		700.0		600.0		500.0		400.0		300.0		200.0		100.0		0.0			
		150		120		90		60		30		0									
		80		60		40		20		0											
		40		20		0															
		20		0																	
		0																			