
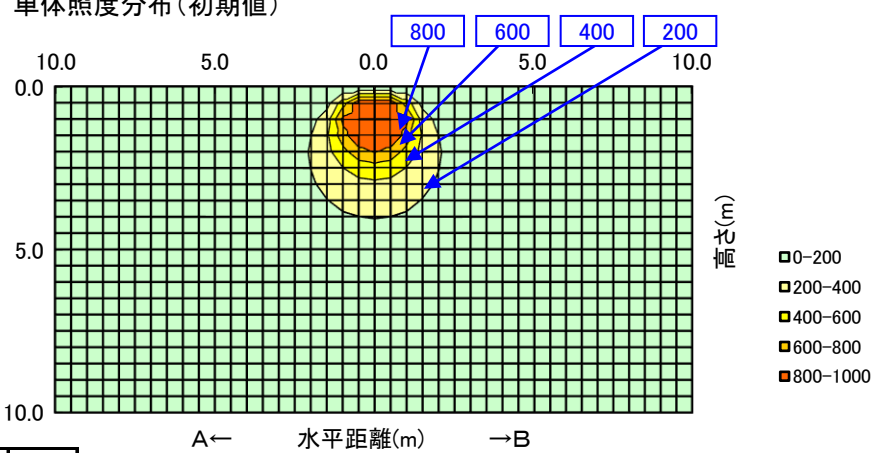
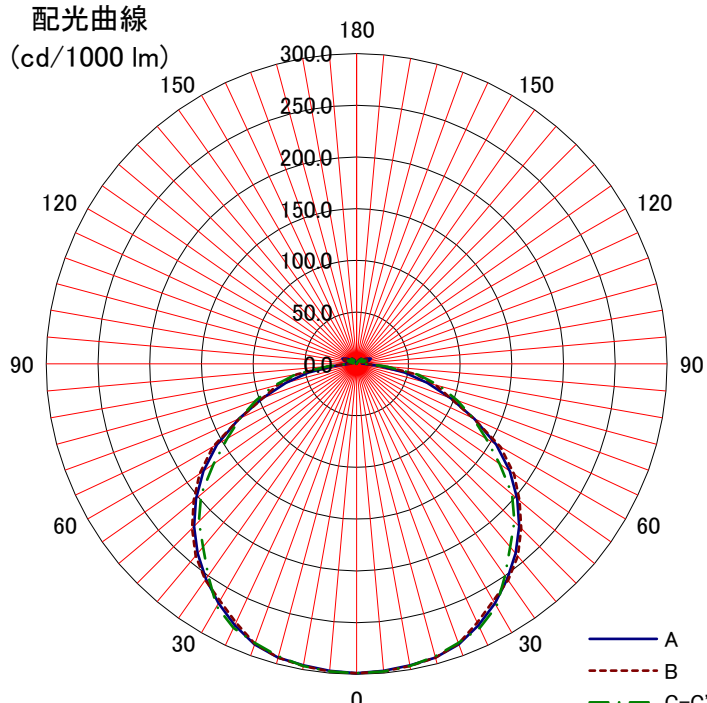


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: MTE11AWN-J14B	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.56	0.44	0.36	0.55	0.43	0.36	0.31	0.42	0.35	0.30	0.41	0.34	0.30	0.28	
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.51	0.45	0.40	0.50	0.44	0.39	0.37	
	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.51	0.46	0.56	0.50	0.46	0.43	
姿図 	1.25	0.78	0.68	0.60	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.62	0.57	0.52	0.50	
	1.5	0.83	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55	
	2	0.88	0.81	0.74	0.86	0.79	0.73	0.68	0.77	0.72	0.67	0.74	0.70	0.66	0.63	
	2.5	0.92	0.85	0.79	0.90	0.84	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68	
	3	0.94	0.88	0.83	0.92	0.87	0.82	0.78	0.84	0.80	0.76	0.81	0.78	0.75	0.71	
光源形式 -	4	0.97	0.93	0.88	0.95	0.91	0.87	0.84	0.88	0.85	0.82	0.85	0.82	0.80	0.76	
	5	0.99	0.95	0.92	0.97	0.94	0.91	0.88	0.91	0.88	0.86	0.88	0.86	0.84	0.80	
器具光束 12,000 lm	7	1.02	0.99	0.96	1.00	0.97	0.95	0.93	0.94	0.92	0.90	0.92	0.90	0.88	0.85	
	10	1.04	1.02	1.00	1.02	1.00	0.99	0.97	0.97	0.96	0.94	0.94	0.93	0.92	0.88	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 3.6%																
下方光束 Fd= 96.4%																
最大取付間隔		配光曲線 (cd/1000 lm) 														
A-A 1.34 H																
B-B 1.34 H																
保守率	良	0.83														
	中	0.81														
	否	0.76														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	299	299	299													
10	296	296	296													
20	288	288	287													
30	267	264	270													
40	239	242	231													
50	203	205	196													
60	156	161	145													
70	97	96	104													
80	47	59	61													
90	7	9	8													
100	5	5	3													
110	15	13	9													
120	10	8	4													
130	5		7													
140	7		5													
150	4		2													
160																
170																
180																