


日立照明器具 照明特性

形式： MTE1403MN <水銀ランプ 400クラス> <ビームの開き：90度>	反 射 率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
		室指数	照明率 S/H=1.0														
	0.6	0.66	0.55	0.49	0.64	0.55	0.48	0.44	0.54	0.48	0.44	0.53	0.48	0.44	0.42		
	0.8	0.76	0.66	0.60	0.74	0.66	0.60	0.55	0.64	0.59	0.55	0.63	0.58	0.55	0.53		
	1	0.82	0.74	0.68	0.81	0.73	0.67	0.63	0.71	0.66	0.62	0.70	0.66	0.62	0.60		
	1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.78	0.73	0.69	0.76	0.72	0.69	0.67		
	1.5	0.91	0.85	0.80	0.90	0.84	0.79	0.75	0.82	0.78	0.75	0.81	0.77	0.74	0.72		
	2	0.96	0.91	0.86	0.94	0.90	0.86	0.83	0.88	0.85	0.82	0.86	0.83	0.81	0.79		
	2.5	0.98	0.94	0.90	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82		
	3	1.00	0.96	0.93	0.99	0.95	0.92	0.89	0.93	0.91	0.88	0.91	0.89	0.87	0.85		
光源	4	1.02	0.99	0.96	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.88		
品名	LED	5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91	
形式	LED	7	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.94	
光束	13,090 lm	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97	

器具効率 Ft= 100.0%
 上方光束 Fu= 0.0%
 下方光束 Fd= 100.0%

配光分類
BZ-

最大取付間隔

A-A 1.40 H


B-B 0.02 H

保守率	良	0.79
	中	0.75
	否	0.71

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	386		
10	419		
20	498		
30	386		
40	304		
50	223		
60	104		
70	15		
80	1		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

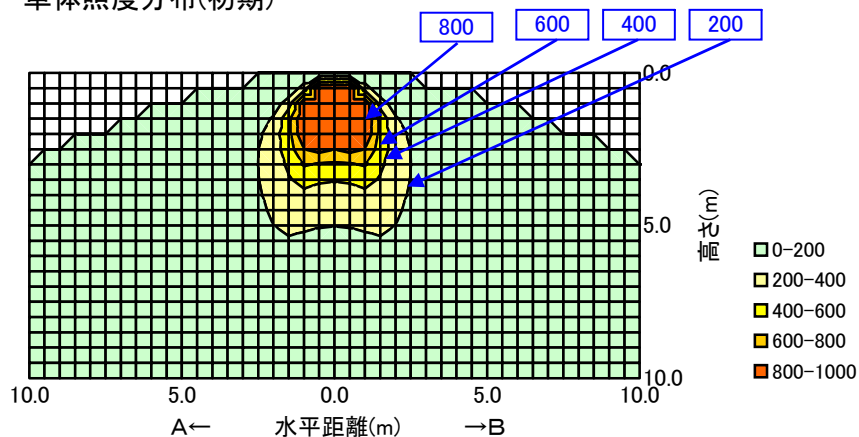

配光曲線

