
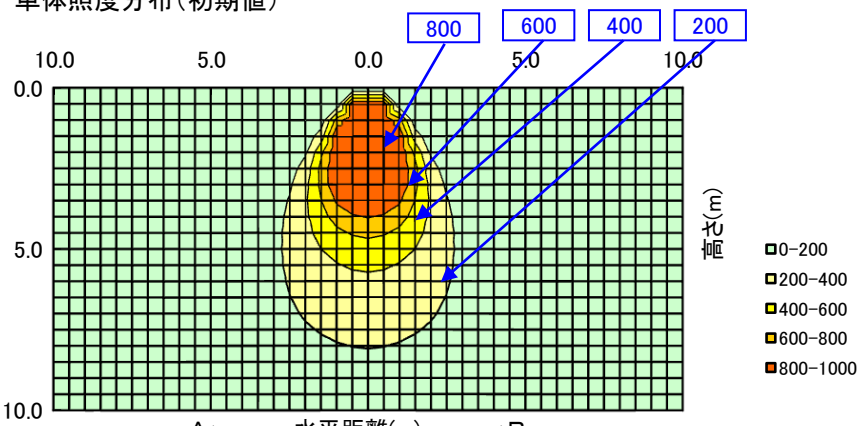
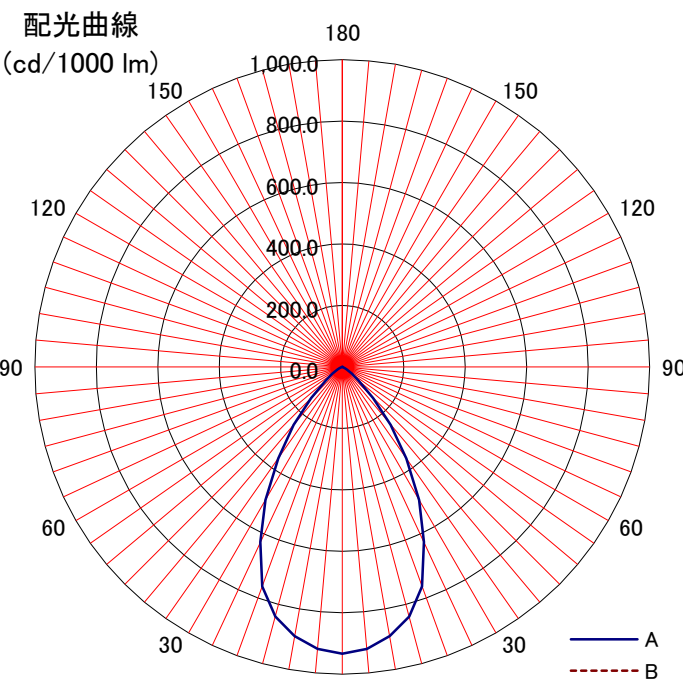


日立照明器具 照明特性

名称: 水銀ランプ 400クラス	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: MTE1403NN	室指数	固有照明率 S/H=1.0														
＜備考＞ ＜水銀ランプ 400クラス＞ ＜ビームの開き:60度＞	0.6	0.80	0.72	0.68	0.79	0.72	0.68	0.65	0.71	0.67	0.64	0.71	0.67	0.64	0.63	
	0.8	0.87	0.81	0.77	0.86	0.80	0.76	0.73	0.79	0.76	0.73	0.79	0.75	0.73	0.71	
姿図 	1	0.91	0.86	0.82	0.90	0.85	0.81	0.79	0.84	0.81	0.78	0.83	0.80	0.78	0.76	
	1.25	0.95	0.90	0.86	0.94	0.89	0.86	0.83	0.88	0.85	0.83	0.87	0.84	0.82	0.81	
	1.5	0.97	0.93	0.90	0.96	0.92	0.89	0.87	0.91	0.88	0.86	0.90	0.88	0.86	0.84	
	2	1.00	0.97	0.94	0.99	0.96	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.88	
	2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.93	0.92	0.90	
	3	1.03	1.00	0.98	1.02	0.99	0.97	0.96	0.98	0.96	0.94	0.96	0.95	0.93	0.91	
光源形式	4	1.04	1.02	1.00	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.98	0.96	0.95	0.93	
--	5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.95	
器具光束	7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.99	0.97	
14,000 lm	10	1.08	1.07	1.06	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	1.01	0.99	
器具効率 Ft= 100.0%		単体照度分布 (初期値) 														
上方光束 Fu= 0.0%																
下方光束 Fd= 100.0%																
最大取付間隔																
A-A 0.94 H																
B-B H																
保守率	良															0.81
	中															0.79
	否															0.75
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0	配光曲線 (cd/1000 lm) 										
0	933															
10	889															
20	760															
30	500															
40	246															
50	70															
60	17															
70	5															
80	2															
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																