


日立照明器具 照明特性

形式: MTE1403NN 〈水銀ランプ 400クラス〉 〈ビームの開き: 60度〉	反 射 率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
			照明率 S/H=1.0													
姿図 	室指数	0.6	0.80	0.73	0.68	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64
		0.8	0.87	0.81	0.77	0.86	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.73	0.72
		1	0.92	0.86	0.82	0.91	0.86	0.82	0.79	0.84	0.81	0.79	0.83	0.81	0.78	0.77
		1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.88	0.85	0.83	0.87	0.85	0.83	0.81
		1.5	0.98	0.93	0.90	0.97	0.93	0.90	0.87	0.91	0.89	0.87	0.90	0.88	0.86	0.84
		2	1.01	0.97	0.94	0.99	0.96	0.94	0.92	0.95	0.93	0.91	0.93	0.92	0.90	0.88
		2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.94	0.92	0.90
		3	1.03	1.00	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91
		4	1.04	1.02	1.00	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.98	0.97	0.95	0.93
		5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95
光源																
品名	LED															
形式	LED															
光束	14,000 lm															

器具効率 Ft= 100.0%
 上方光束 Fu= 0.0%
 下方光束 Fd= 100.0%

配光分類

BZ-

最大取付間隔

A-A 0.94 H


B-B H

保守率	良	0.79
	中	0.75
	否	0.71

光度 (cd/1000 lm)

	A-0	B-B	C-0
0	933		
10	889		
20	760		
30	500		
40	246		
50	70		
60	17		
70	5		
80	2		
90			
100			
110			
120			
130			
140			
150			
160			
170			
180			

単体照度分布(初期)

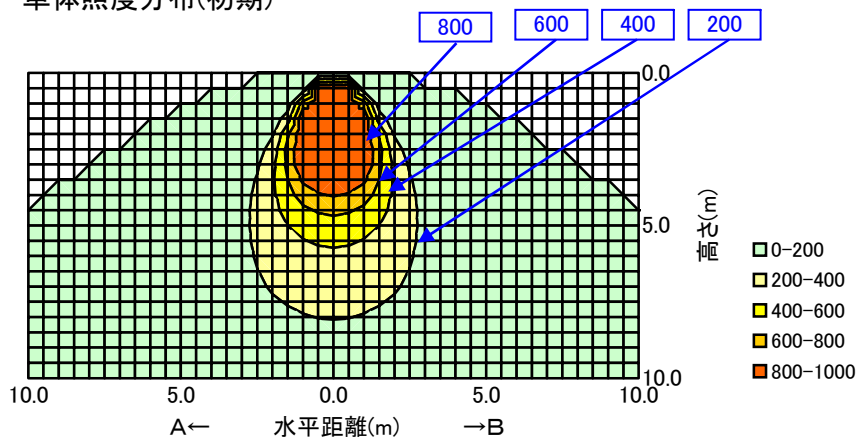

配光曲線

