
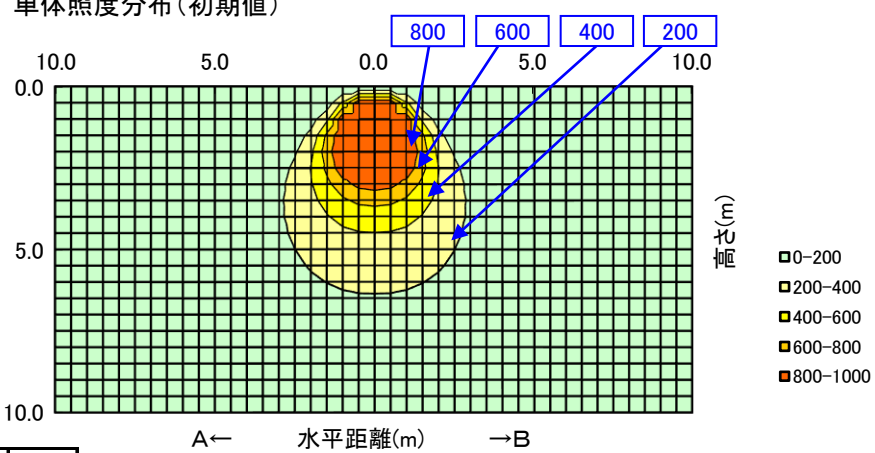
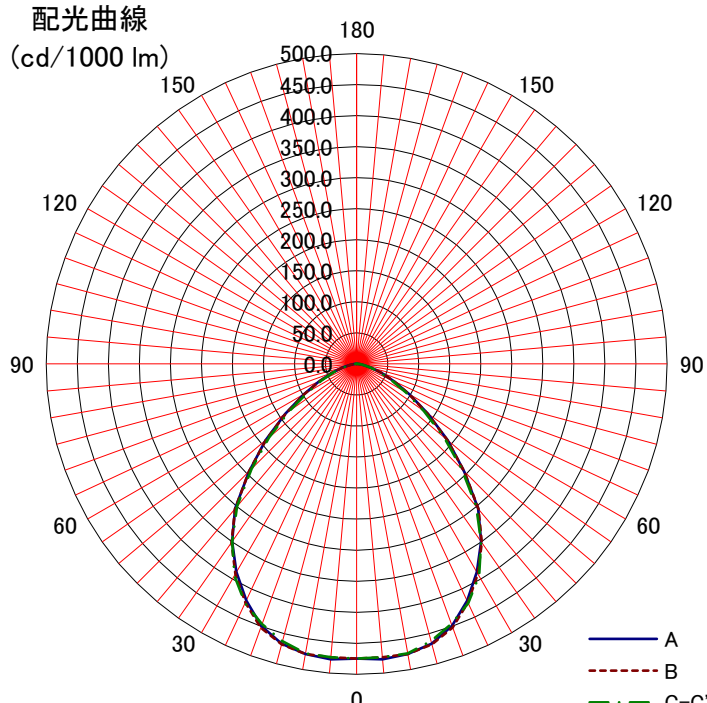


日立照明器具 照明特性

名称: 高天井用LED器具		天井 反射率	80%			70%				50%			30%			0%	
			壁 70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: MTE17AMN-X14B		床 室指数	固有照明率 S/H=1.0														0%
			10%														0%
＜備考＞		0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
		0.8	0.75	0.65	0.59	0.73	0.65	0.58	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52	
姿図 		1	0.81	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.65	0.61	0.69	0.64	0.60	0.58	
		1.25	0.86	0.78	0.73	0.85	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65	
		1.5	0.90	0.83	0.78	0.88	0.82	0.77	0.73	0.80	0.76	0.73	0.79	0.75	0.72	0.70	
		2	0.95	0.89	0.85	0.93	0.88	0.84	0.80	0.86	0.83	0.80	0.85	0.81	0.79	0.77	
		2.5	0.97	0.92	0.88	0.96	0.91	0.88	0.85	0.90	0.86	0.84	0.88	0.85	0.83	0.80	
		3	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.87	0.85	0.83	
光源形式 -		4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.92	0.90	0.93	0.91	0.89	0.87	
		5	1.03	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89	
器具光束 17,000 lm		7	1.05	1.03	1.01	1.03	1.02	1.00	0.99	1.00	0.98	0.97	0.98	0.96	0.95	0.93	
		10	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96	
器具効率 Ft= 100%			単体照度分布(初期値)														
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A 1.22 H																	
B-B 1.22 H																	
保守率	良	0.83															
	中	0.81															
	否	0.76															
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm)														
	A-0	B-B	C-0	A'-0	C'-0												
0	475	475	475														
10	475	475	473														
20	449	452	446														
30	387	391	394														
40	305	305	299														
50	191	190	184														
60	99	97	91														
70	42	43	39														
80	12	12	12														
90	1	1	1														
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	