
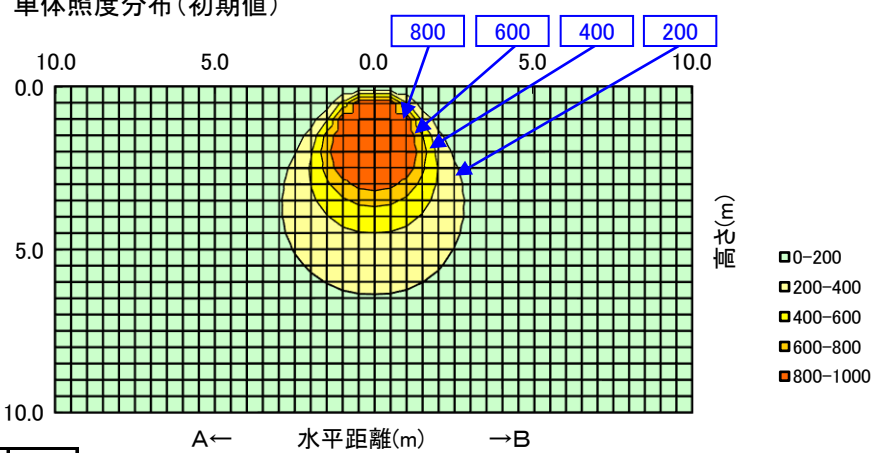
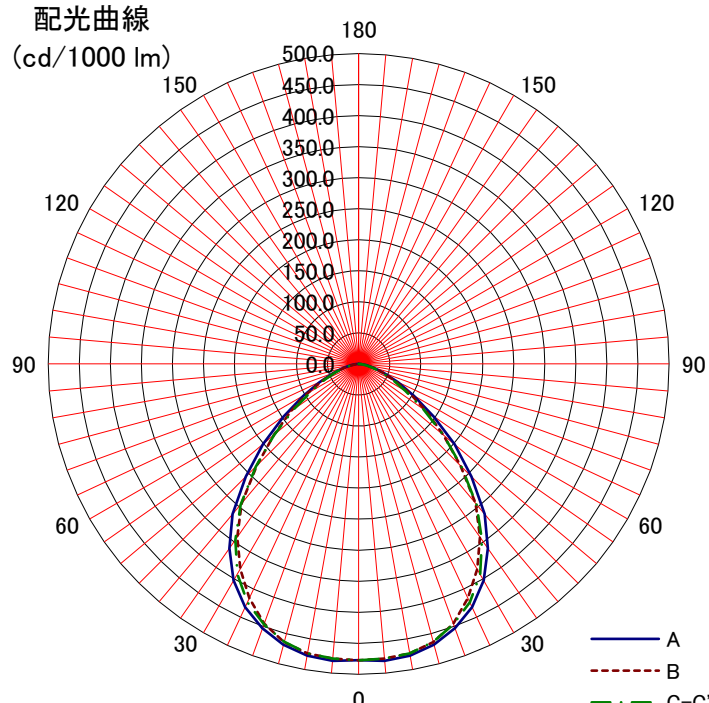


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: MTE17AMN-Z14A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(広角)	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
	0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51	
姿図 	1	0.80	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.64	0.60	0.68	0.64	0.60	0.58	
	1.25	0.85	0.78	0.72	0.84	0.77	0.72	0.68	0.76	0.71	0.67	0.74	0.70	0.67	0.65	
	1.5	0.89	0.83	0.77	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.78	0.75	0.72	0.70	
	2	0.94	0.88	0.84	0.93	0.88	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76	
	2.5	0.96	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80	
	3	0.98	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82	
光源形式	4	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.92	0.90	0.89	0.86	
	5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.89	
器具光束 17,000 lm	7	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
	10	1.05	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.98	0.95	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.26 H																
B-B 1.20 H																
保守率	良	0.81	配光曲線 (cd/1000 lm) 													
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	477	477	477													
10	477	474	474													
20	453	445	446													
30	403	382	391													
40	316	293	296													
50	202	178	178													
60	103	95	87													
70	44	41	39													
80	12	11	11													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																