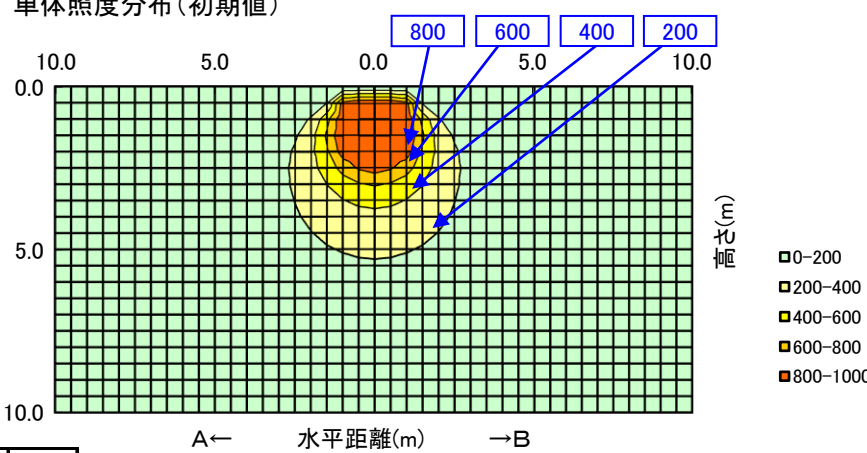
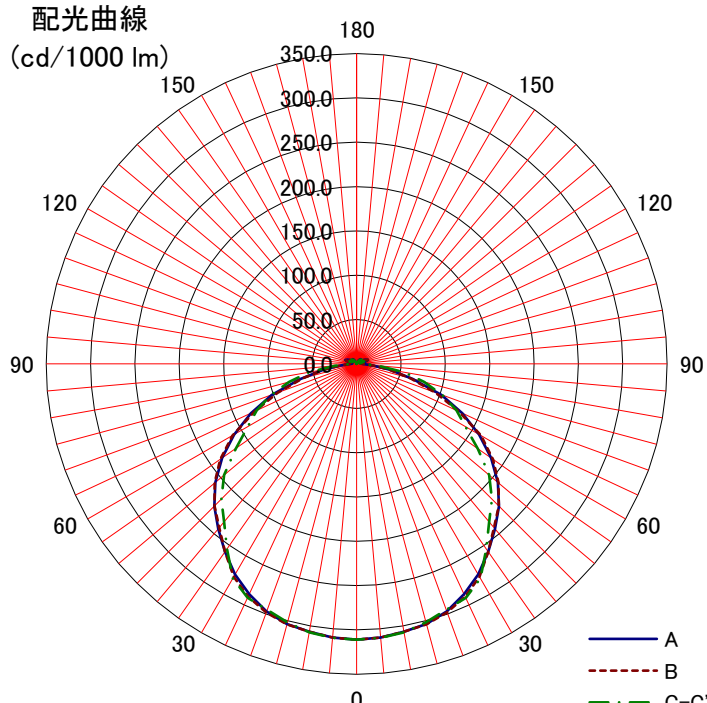


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: MTE17AWN-J14B	床		10%													0%
	室指数	固有照明率 S/H=1.0														
<備考>	0.6	0.57	0.45	0.37	0.55	0.44	0.37	0.31	0.43	0.36	0.31	0.41	0.35	0.31	0.29	
	0.8	0.66	0.55	0.47	0.65	0.54	0.46	0.41	0.52	0.46	0.40	0.51	0.45	0.40	0.38	
姿図	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.52	0.47	0.57	0.51	0.47	0.44	
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.65	0.59	0.54	0.63	0.58	0.54	0.51	
	1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.60	0.68	0.63	0.59	0.56	
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.70	0.77	0.73	0.68	0.75	0.71	0.67	0.64	
	2.5	0.92	0.86	0.80	0.90	0.84	0.79	0.75	0.82	0.77	0.74	0.79	0.75	0.72	0.69	
	3	0.95	0.89	0.84	0.93	0.87	0.83	0.79	0.85	0.81	0.77	0.82	0.79	0.76	0.72	
光源形式	4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.89	0.86	0.83	0.86	0.83	0.81	0.77	
	5	1.00	0.96	0.93	0.98	0.95	0.91	0.88	0.92	0.89	0.86	0.89	0.86	0.84	0.81	
器具光束 18,000 lm	7	1.02	1.00	0.97	1.01	0.98	0.96	0.93	0.95	0.93	0.91	0.92	0.91	0.89	0.85	
	10	1.04	1.02	1.01	1.02	1.01	0.99	0.98	0.98	0.96	0.95	0.95	0.94	0.93	0.89	
器具効率 Ft= 100%		单体照度分布(初期値) 														
上方光束 Fu= 3.6%																
下方光束 Fd= 96.4%																
最大取付間隔																
A-A 1.32 H																
B-B 1.32 H																
保守率	良	0.83														
	中	0.81														
	否	0.76														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	311	311	311													
10	307	307	307													
20	297	298	295													
30	274	277	279													
40	243	241	233													
50	208	209	195													
60	160	162	142													
70	102	95	104													
80	38	37	54													
90	6	6	6													
100	6	5	3													
110	13	14	9													
120	9	9	5													
130	6		8													
140	7		5													
150	4		3													
160																
170																
180																

配光曲線 (cd/1000 lm)														
180	150	120	90	60	30	0	30	60	90	120	150	180		
350.0	300.0	250.0	200.0	150.0	100.0	50.0	0.0	50.0	100.0	150.0	200.0	250.0	300.0	350.0
														
A B C-C'														