

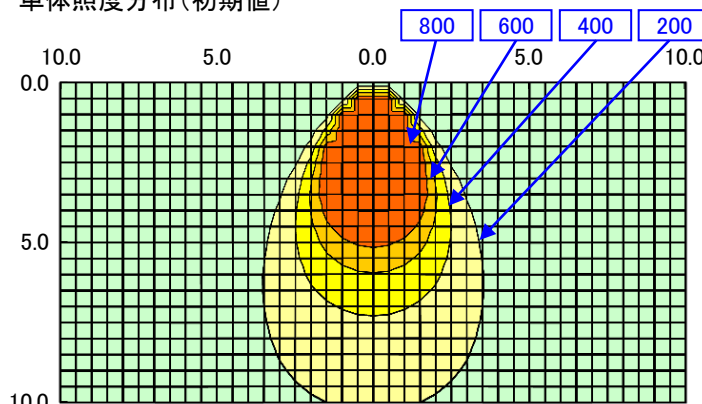


日立照明器具 照明特性

名称: 高天井用LED器具	反 射 率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													0%
形式: MTE2203NN-Z14B	室指数	固有照明率 S/H=1.0														
＜備考＞ 高天井用LED器具 光束の開き角: 60°	0.6	0.80	0.73	0.68	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64	
	0.8	0.87	0.81	0.77	0.86	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.73	0.72	
姿図 	1	0.92	0.86	0.82	0.91	0.86	0.82	0.79	0.85	0.81	0.79	0.84	0.81	0.78	0.77	
	1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.89	0.86	0.83	0.87	0.85	0.83	0.81	
	1.5	0.98	0.94	0.90	0.97	0.93	0.90	0.87	0.91	0.89	0.87	0.90	0.88	0.86	0.84	
	2	1.01	0.97	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.94	0.92	0.90	0.88	
	2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.94	0.92	0.90	
	3	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.92	
光源形式	4	1.04	1.02	1.01	1.03	1.01	1.00	0.98	1.00	0.98	0.97	0.98	0.97	0.96	0.93	
LED	5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95	
器具光束	7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97	
22,800 lm	10	1.08	1.07	1.07	1.07	1.06	1.06	1.05	1.04	1.04	1.03	1.02	1.02	1.01	0.99	
器具効率 Ft=		100%														
上方光束 Fu=		0.0%														
下方光束 Fd=		100.0%														
最大取付間隔																
A-A		0.96	H													
B-B			H													
保守率	良	0.81														
	中	0.79														
	否	0.75														
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	932															
10	896															
20	766															
30	512															
40	241															
50	66															
60	16															
70	5															
80																
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																

配光曲線
(cd/1000 lm)

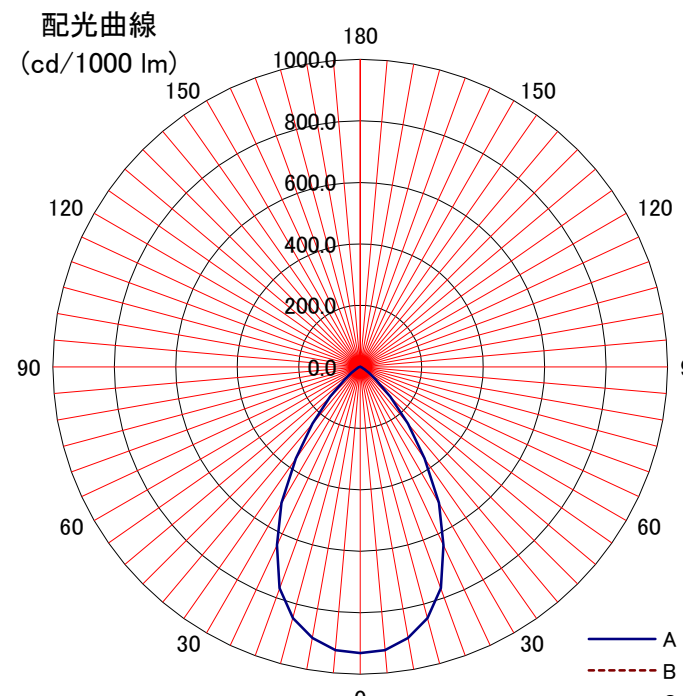

— A
- - - B
- · - C-C'