
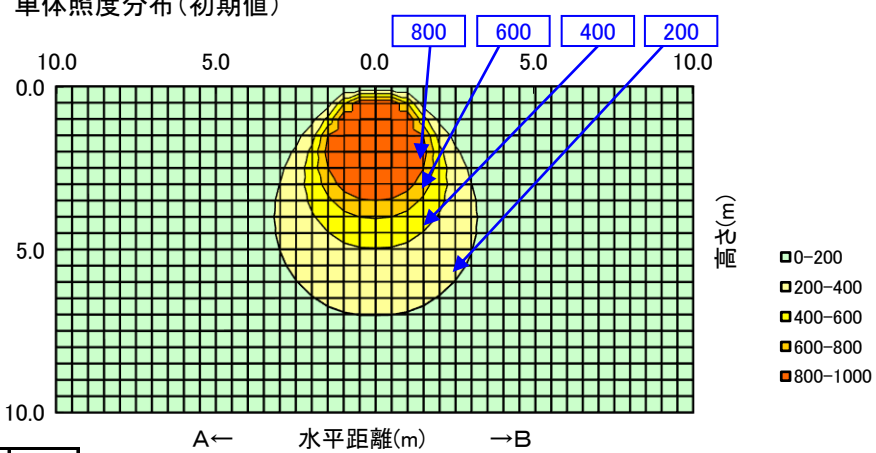
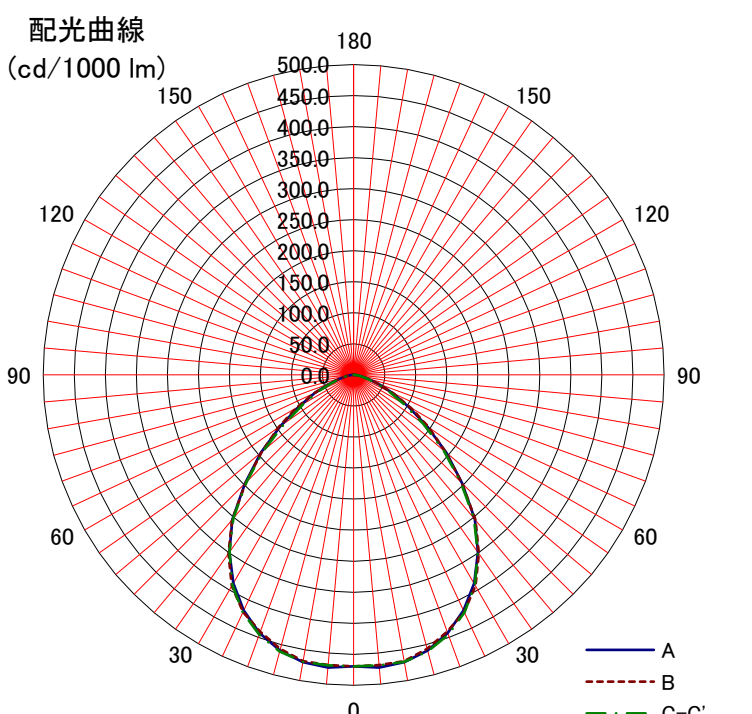


日立照明器具 照明特性																																																																																																																																								
名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: MTE22AMN-J14B		床	10%													0%																																																																																																																								
姿図 	室指数	固有照明率 S/H=1.0																																																																																																																																						
	0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41																																																																																																																									
	0.8	0.75	0.65	0.59	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51																																																																																																																									
	1	0.81	0.72	0.66	0.80	0.71	0.65	0.61	0.70	0.65	0.61	0.69	0.64	0.60	0.58																																																																																																																									
	1.25	0.86	0.78	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.67	0.75	0.70	0.67	0.65																																																																																																																									
	1.5	0.90	0.83	0.78	0.89	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.70																																																																																																																									
	2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77																																																																																																																									
	2.5	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81																																																																																																																									
	3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83																																																																																																																									
	光源形式	4	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87																																																																																																																								
-	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90																																																																																																																									
器具光束	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93																																																																																																																									
21,000 lm	10	1.07	1.06	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.99	0.96																																																																																																																									
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 100%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																						
A-A 1.24 H																																																																																																																																								
B-B 1.24 H																																																																																																																																								
保守率																																																																																																																																								
良	0.83	光度 (cd/1000 lm) <table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>470</td><td>470</td><td>470</td><td></td><td></td></tr><tr><td>10</td><td>470</td><td>468</td><td>469</td><td></td><td></td></tr><tr><td>20</td><td>443</td><td>440</td><td>445</td><td></td><td></td></tr><tr><td>30</td><td>388</td><td>392</td><td>391</td><td></td><td></td></tr><tr><td>40</td><td>304</td><td>305</td><td>301</td><td></td><td></td></tr><tr><td>50</td><td>195</td><td>194</td><td>190</td><td></td><td></td></tr><tr><td>60</td><td>102</td><td>108</td><td>93</td><td></td><td></td></tr><tr><td>70</td><td>43</td><td>43</td><td>38</td><td></td><td></td></tr><tr><td>80</td><td>11</td><td>11</td><td>11</td><td></td><td></td></tr><tr><td>90</td><td>1</td><td>1</td><td>1</td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>																A-0	B-B	C-0	A'-0	C'-0	0	470	470	470			10	470	468	469			20	443	440	445			30	388	392	391			40	304	305	301			50	195	194	190			60	102	108	93			70	43	43	38			80	11	11	11			90	1	1	1			100						110						120						130						140						150						160						170						180					
	A-0																B-B	C-0	A'-0	C'-0																																																																																																																				
0	470																470	470																																																																																																																						
10	470																468	469																																																																																																																						
20	443	440	445																																																																																																																																					
30	388	392	391																																																																																																																																					
40	304	305	301																																																																																																																																					
50	195	194	190																																																																																																																																					
60	102	108	93																																																																																																																																					
70	43	43	38																																																																																																																																					
80	11	11	11																																																																																																																																					
90	1	1	1																																																																																																																																					
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
中	0.81																																																																																																																																							
否	0.76																																																																																																																																							