
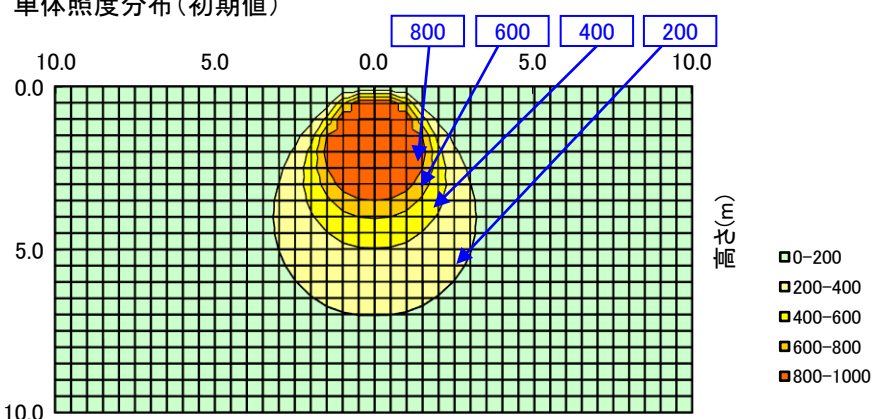
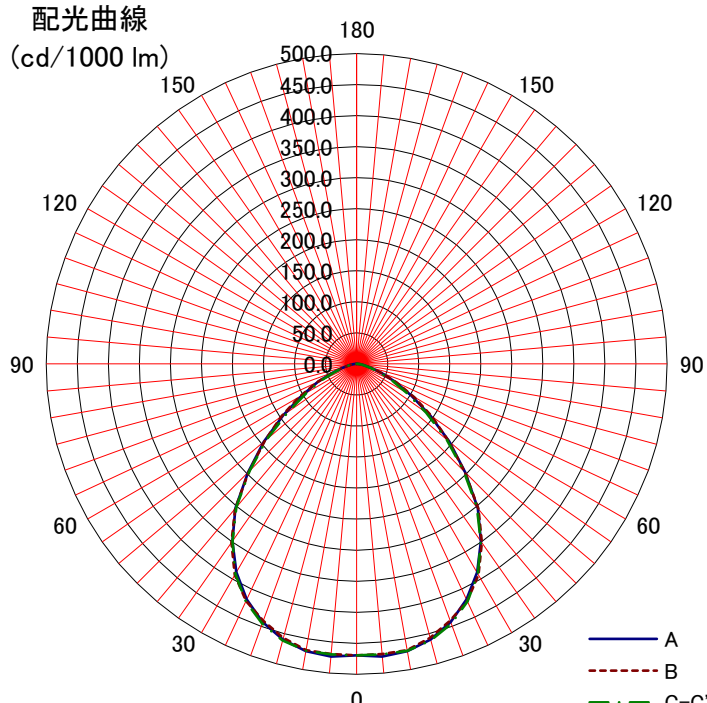


日立照明器具 照明特性

名称: 高天井用LED器具		天井 反射率	80%			70%				50%			30%			0%	
			壁 70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: MTE22AMN-X14B		床 室指数	固有照明率 S/H=1.0														0%
			10%														0%
<備考>		0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
		0.8	0.75	0.65	0.59	0.73	0.64	0.58	0.54	0.63	0.58	0.53	0.62	0.57	0.53	0.51	
姿図 		1	0.81	0.72	0.66	0.80	0.71	0.65	0.61	0.70	0.65	0.61	0.69	0.64	0.60	0.58	
		1.25	0.86	0.78	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.67	0.75	0.70	0.67	0.65	
		1.5	0.90	0.83	0.78	0.89	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.70	
		2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77	
		2.5	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81	
		3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83	
光源形式 -		4	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87	
		5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90	
器具光束 21,000 lm		7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93	
		10	1.07	1.06	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.99	0.96	
器具効率 Ft= 100%			単体照度分布(初期値) 														
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔			A-A 1.24 H B-B 1.24 H														
保守率	良	0.83	配光曲線 (cd/1000 lm) 														
	中	0.81															
	否	0.76															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	470	470	470														
10	470	468	469														
20	443	440	445														
30	388	392	391														
40	304	305	301														
50	195	194	190														
60	102	108	93														
70	43	43	38														
80	11	11	11														
90	1	1	1														
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	