

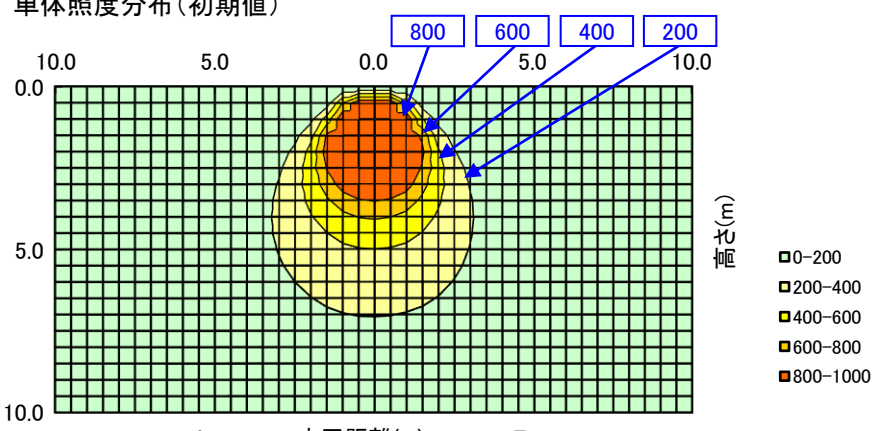


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: MTE22AMN-Z14A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(広角)	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
	0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.57	0.53	0.62	0.57	0.53	0.51	
姿図 	1	0.80	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.64	0.60	0.68	0.64	0.60	0.58	
	1.25	0.86	0.78	0.72	0.84	0.77	0.72	0.67	0.76	0.71	0.67	0.74	0.70	0.67	0.65	
	1.5	0.89	0.83	0.77	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.78	0.75	0.72	0.70	
	2	0.94	0.89	0.84	0.93	0.88	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76	
	2.5	0.97	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80	
	3	0.98	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82	
	4	1.01	0.97	0.94	0.99	0.96	0.94	0.91	0.94	0.92	0.90	0.92	0.90	0.89	0.86	
光源形式 -	5	1.02	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.89	
	7	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92	
器具光束 20,900 lm	10	1.06	1.05	1.03	1.04	1.03	1.02	1.01	1.01	1.00	1.00	0.99	0.99	0.98	0.95	

器具効率 Ft= 100%			単体照度分布(初期値) 		
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		1.24 H			
B-B		1.20 H			
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	477	477	477		
10	475	471	473		
20	448	443	446		
30	398	379	388		
40	316	289	296		
50	205	181	180		
60	112	92	89		
70	44	41	39		
80	12	11	11		
90	2	1	2		
100					
110					
120					
130					
140					
150					
160					
170					
180					

配光曲線
(cd/1000 lm)

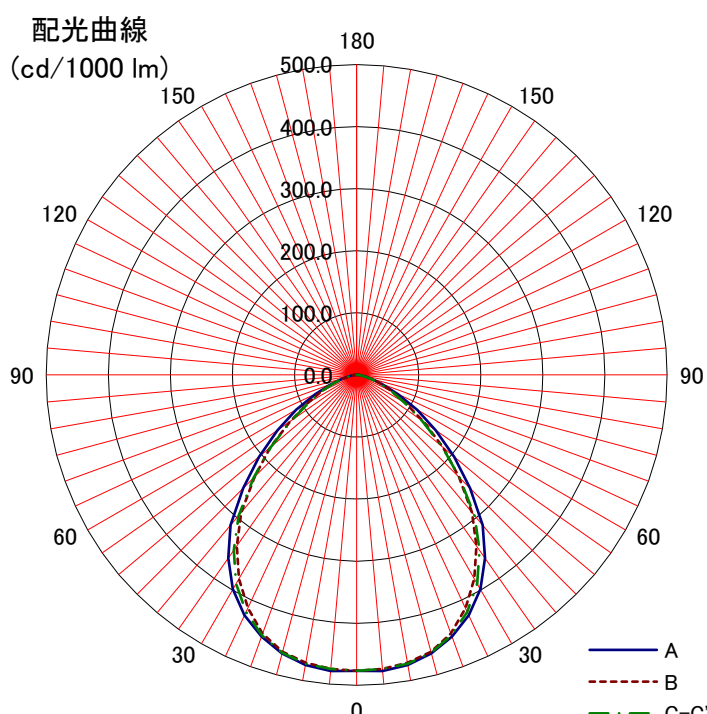

A
B
C-C'