
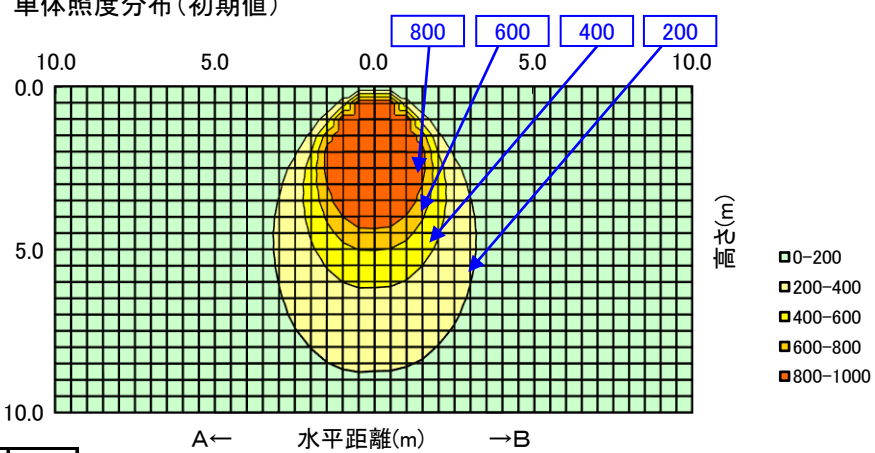
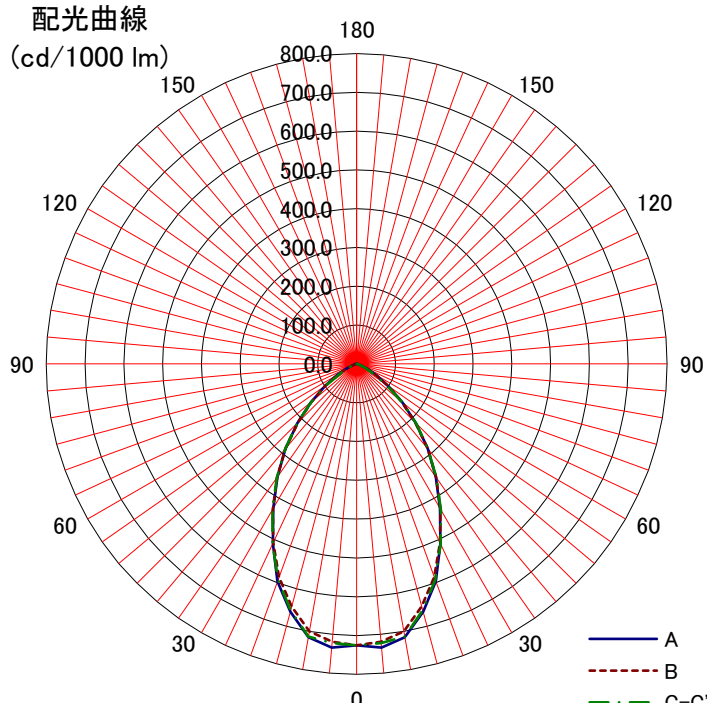


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: MTE22ANN-J14B	室指数	床	10%														0%
		固有照明率 S/H=1.0															
〈備考〉	0.6	0.72	0.64	0.58	0.71	0.63	0.58	0.54	0.62	0.57	0.54	0.61	0.57	0.54	0.52		
	0.8	0.81	0.73	0.68	0.80	0.73	0.68	0.64	0.72	0.67	0.64	0.71	0.67	0.63	0.62		
姿図 	1	0.87	0.80	0.74	0.85	0.79	0.74	0.70	0.78	0.73	0.70	0.76	0.73	0.70	0.68		
	1.25	0.91	0.85	0.80	0.90	0.84	0.80	0.76	0.83	0.79	0.76	0.81	0.78	0.75	0.74		
	1.5	0.94	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.80	0.78		
	2	0.98	0.94	0.90	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.90	0.87	0.85	0.83		
	2.5	1.00	0.96	0.93	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86		
	3	1.01	0.98	0.95	1.00	0.97	0.95	0.92	0.95	0.93	0.91	0.94	0.92	0.90	0.88		
光源形式	4	1.03	1.01	0.98	1.02	1.00	0.97	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.91		
	5	1.04	1.02	1.00	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.93		
器具光束 21,000 lm	7	1.06	1.05	1.03	1.05	1.04	1.02	1.01	1.02	1.01	1.00	1.00	0.99	0.98	0.95		
	10	1.07	1.07	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.98		
器具効率 Ft= 100%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A 0.98 H																	
B-B 0.98 H																	
保守率	良	0.83	配光曲線 (cd/1000 lm) 														
	中	0.81															
	否	0.76															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	725	725	725														
10	715	700	714														
20	596	585	592														
30	430	432	434														
40	285	285	287														
50	155	151	154														
60	60	58	48														
70	13	11	8														
80	4	2	4														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	