



日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: MTE22ANN-Z14A	室指数	固有照明率 S/H=1.0														
<備考> 配光角(中角)	0.6	0.74	0.66	0.61	0.73	0.66	0.61	0.57	0.65	0.60	0.57	0.64	0.60	0.57	0.55	
	0.8	0.83	0.75	0.70	0.82	0.75	0.70	0.67	0.74	0.70	0.66	0.73	0.69	0.66	0.65	
姿図 	1	0.88	0.81	0.77	0.87	0.81	0.76	0.73	0.79	0.75	0.72	0.78	0.75	0.72	0.71	
	1.25	0.92	0.86	0.82	0.91	0.86	0.81	0.78	0.84	0.81	0.78	0.83	0.80	0.77	0.76	
	1.5	0.95	0.90	0.86	0.94	0.89	0.86	0.83	0.88	0.85	0.82	0.86	0.84	0.81	0.80	
	2	0.99	0.95	0.91	0.97	0.94	0.91	0.88	0.92	0.90	0.87	0.91	0.88	0.86	0.85	
	2.5	1.00	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.93	0.91	0.89	0.87	
	3	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.89	
	4	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91	
光源形式 -	5	1.04	1.03	1.01	1.03	1.01	1.00	0.98	1.00	0.98	0.97	0.98	0.97	0.95	0.93	
	7	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96	
器具光束 20,600 lm	10	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	0.98	

器具効率 Ft= 100%					
上方光束 Fu= 0%					
下方光束 Fd= 100%					
最大取付間隔					
A-A		0.96	H		
B-B		0.94	H		
保守率	良	0.81			
	中	0.79			
	否	0.75			
光度 (cd/1000 lm)					
	A-0	B-B	C-0	A'-0	C'-0
0	793	793	793		
10	790	782	776		
20	635	639	637		
30	449	435	443		
40	291	262	275		
50	146	123	132		
60	44	37	39		
70	8	8	8		
80	2	4	2		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

単体照度分布(初期値)

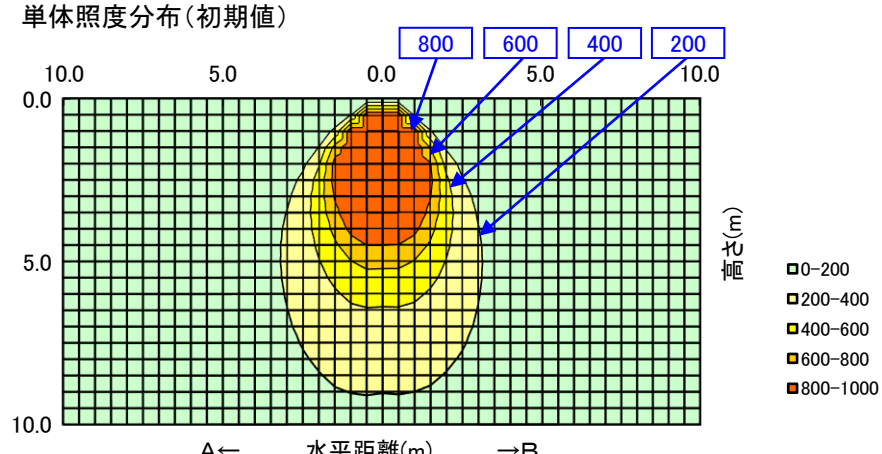


A ← 水平距離(m) → B

(E) 照度

- 0-200
- 200-400
- 400-600
- 600-800
- 800-1000

配光曲線
(cd/1000 lm)

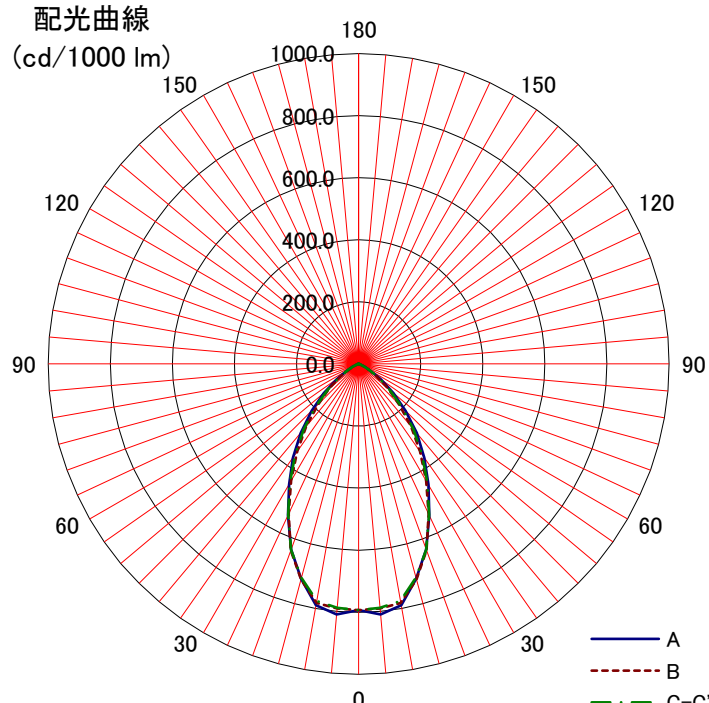

180
150
120
90
60
30
0

1000.0
800.0
600.0
400.0
200.0
0.0

A
B
C-C'