
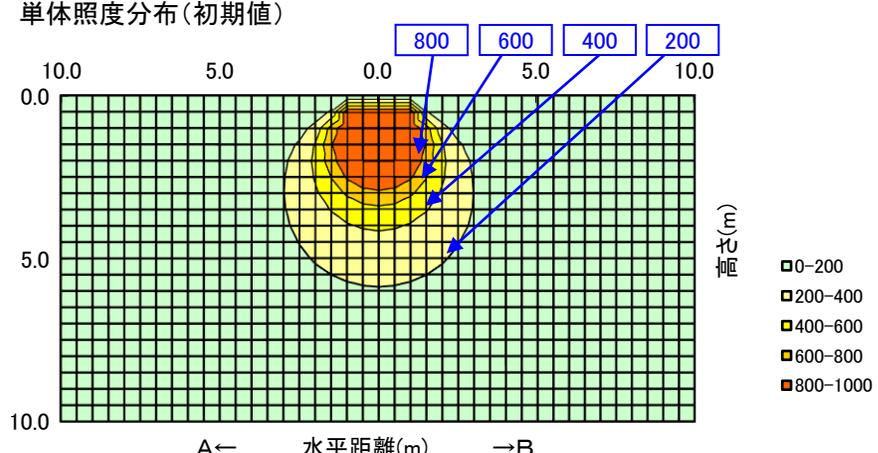


## 日立照明器具 照明特性

名称: 高天井用LED器具	反射率	80%			70%				50%			30%			0%
		天井	壁	床	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: MTE22AWN-J14B		固有照明率 S/H=1.0													
室指数		固有照明率 S/H=1.0													
<備考>	0.6	0.56	0.44	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.30	0.28
	0.8	0.66	0.54	0.47	0.64	0.54	0.46	0.41	0.52	0.45	0.40	0.50	0.44	0.40	0.37
姿図 	1	0.72	0.62	0.54	0.71	0.61	0.53	0.48	0.59	0.52	0.47	0.57	0.51	0.46	0.44
	1.25	0.78	0.69	0.61	0.76	0.67	0.60	0.55	0.65	0.59	0.54	0.63	0.58	0.53	0.51
	1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.70	0.65	0.60	0.68	0.63	0.59	0.56
	2	0.88	0.81	0.75	0.87	0.80	0.74	0.69	0.77	0.72	0.68	0.75	0.71	0.67	0.64
	2.5	0.92	0.86	0.80	0.90	0.84	0.79	0.75	0.81	0.77	0.73	0.79	0.75	0.72	0.69
	3	0.94	0.89	0.84	0.92	0.87	0.83	0.79	0.84	0.81	0.77	0.82	0.78	0.76	0.72
光源形式 -	4	0.97	0.93	0.89	0.95	0.91	0.88	0.84	0.88	0.85	0.82	0.86	0.83	0.81	0.77
	5	0.99	0.96	0.92	0.98	0.94	0.91	0.88	0.91	0.89	0.86	0.88	0.86	0.84	0.81
器具光束 22,500 lm	7	1.02	0.99	0.97	1.00	0.98	0.95	0.93	0.95	0.93	0.91	0.92	0.90	0.89	0.85
	10	1.04	1.02	1.00	1.02	1.00	0.99	0.97	0.97	0.96	0.95	0.95	0.93	0.92	0.89
器具効率 Ft= 100%															
上方光束 Fu= 3.6%															
下方光束 Fd= 96.0%															
最大取付間隔															
A-A		1.32	H												
B-B		1.34	H												
保守率	良	0.83													
	中	0.81													
	否	0.76													
光度 (cd/1000 lm)															
	A-0	B-B	C-0	A'-0	C'-0										
0	306	306	306												
10	303	303	303												
20	294	295	293												
30	272	274	273												
40	241	245	235												
50	206	204	198												
60	163	165	148												
70	94	87	109												
80	37	36	48												
90	6	6	5												
100	5	4	3												
110	14	11	8												
120	10	9	5												
130	5		8												
140	7		5												
150	5		2												
160															
170															
180															
単体照度分布(初期値)															
															
配光曲線 (cd/1000 lm)															
