
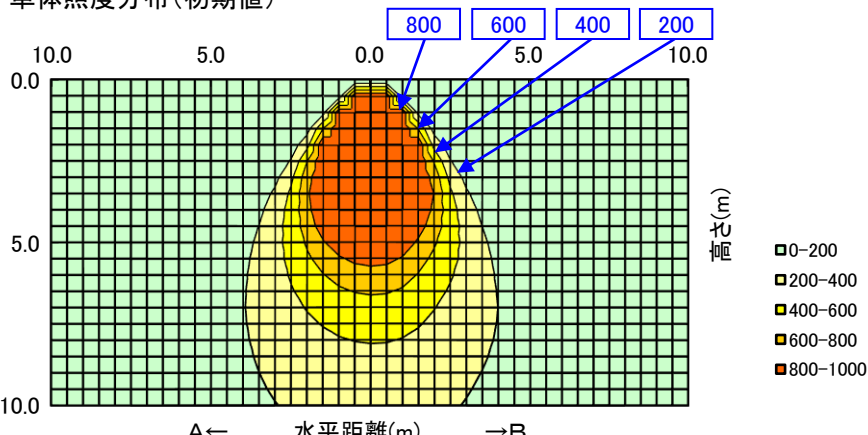
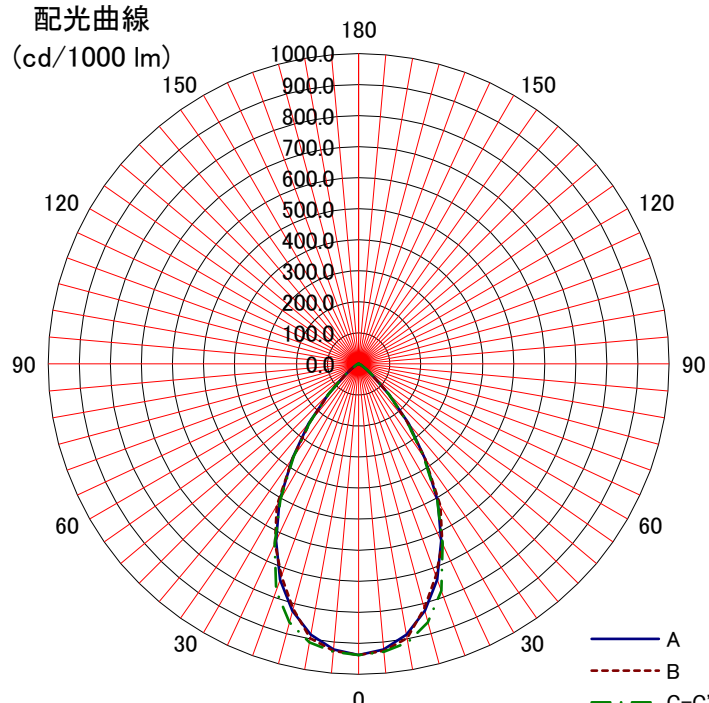


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井 壁 床	80%			70%				50%			30%			0%
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			10%													0%
形式: MTE28ANN-Z24A	室指数		固有照明率 S/H=1.0													
<備考> 配光角(中角)	0.6	0.80	0.73	0.68	0.79	0.72	0.68	0.65	0.72	0.68	0.65	0.71	0.67	0.65	0.64	
	0.8	0.87	0.81	0.77	0.86	0.81	0.77	0.74	0.80	0.76	0.73	0.79	0.76	0.73	0.72	
姿図 	1	0.91	0.86	0.82	0.90	0.85	0.82	0.79	0.84	0.81	0.79	0.83	0.80	0.78	0.77	
	1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.88	0.85	0.83	0.87	0.85	0.83	0.81	
	1.5	0.97	0.93	0.90	0.96	0.93	0.90	0.87	0.91	0.89	0.86	0.90	0.88	0.86	0.84	
	2	1.00	0.97	0.94	0.99	0.96	0.94	0.92	0.95	0.93	0.91	0.93	0.92	0.90	0.88	
	2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.93	0.92	0.90	
	3	1.03	1.00	0.98	1.02	0.99	0.97	0.96	0.98	0.96	0.94	0.96	0.95	0.93	0.91	
	4	1.04	1.02	1.00	1.03	1.01	0.99	0.98	0.99	0.98	0.97	0.98	0.96	0.95	0.93	
光源形式	5	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.01	0.99	0.98	0.99	0.98	0.97	0.95	
	7	1.06	1.05	1.04	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.97	
器具光束 28,000 lm	10	1.07	1.07	1.06	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	0.98	

器具効率 Ft= 100%			単体照度分布(初期値) 					
上方光束 Fu= 0%								
下方光束 Fd= 100%								
最大取付間隔			配光曲線 (cd/1000 lm) 					
A-A 0.94 H								
B-B 0.96 H								
保守率	良	0.81						
	中	0.79						
	否	0.75						
光度 (cd/1000 lm)								
	A-0	B-B	C-0	A'-0	C'-0			
0	938	938	938					
10	886	897	911					
20	740	727	778					
30	511	527	505					
40	251	242	245					
50	62	62	67					
60	14	14	15					
70	4	3	3					
80	1	1	1					
90								
100								
110								
120								
130								
140								
150								
160								
170								
180								