
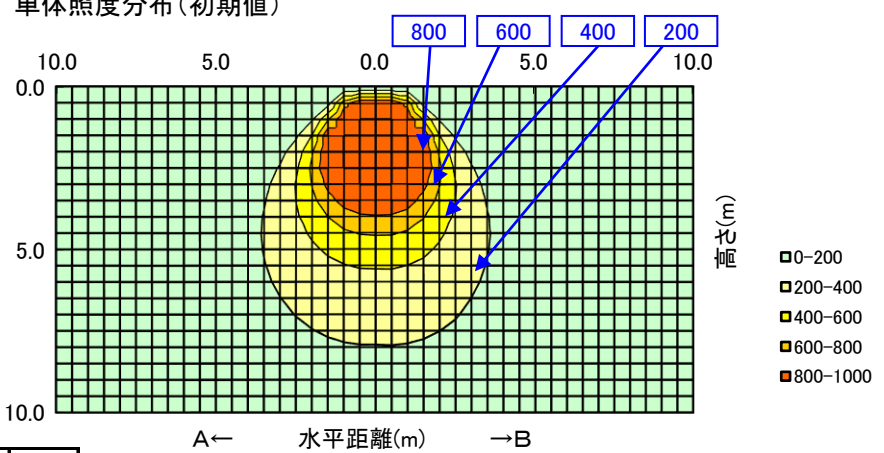
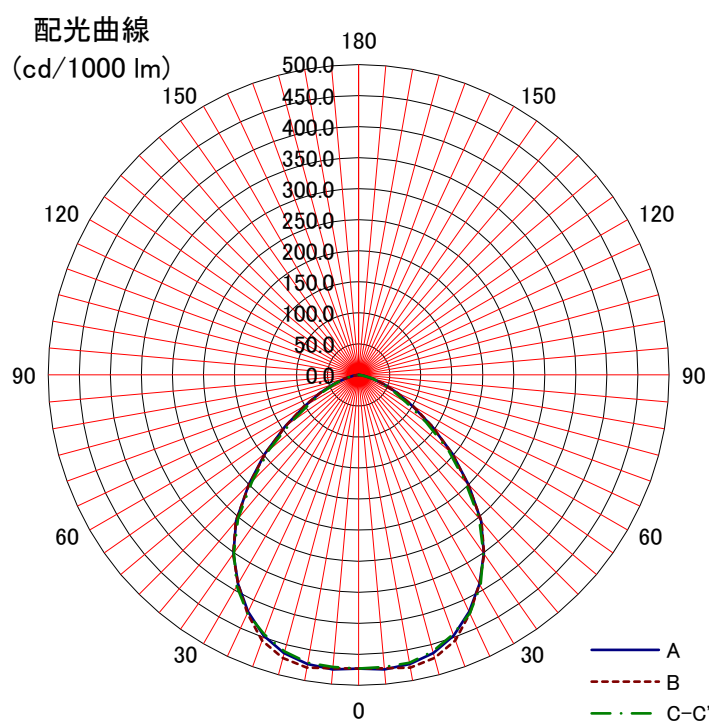


日立照明器具 照明特性																																																																																																																																								
名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																								
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: MTE28BMN-J24A		床	10%													0%																																																																																																																								
室指数 固有照明率 S/H=1.0 <備考> 姿図  光源形式 - 器具光束 26,500 lm	室指数	固有照明率 S/H=1.0																																																																																																																																						
	0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41																																																																																																																									
	0.8	0.75	0.65	0.59	0.74	0.65	0.59	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52																																																																																																																									
	1	0.81	0.72	0.66	0.80	0.72	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.61	0.59																																																																																																																									
	1.25	0.86	0.79	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.68	0.75	0.71	0.67	0.65																																																																																																																									
	1.5	0.90	0.83	0.78	0.89	0.82	0.78	0.74	0.81	0.76	0.73	0.79	0.75	0.72	0.70																																																																																																																									
	2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77																																																																																																																									
	2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81																																																																																																																									
	3	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83																																																																																																																									
	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87																																																																																																																									
5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90																																																																																																																										
7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93																																																																																																																										
10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.99	0.96																																																																																																																										
器具効率 Ft= 100%		単体照度分布(初期値)  A← 水平距離(m) →B																																																																																																																																						
上方光束 Fu= 0%																																																																																																																																								
下方光束 Fd= 100%																																																																																																																																								
最大取付間隔		配光曲線 (cd/1000 lm)  A← 水平距離(m) →B																																																																																																																																						
A-A 1.22 H																																																																																																																																								
B-B 1.22 H																																																																																																																																								
保守率	良	0.83	光度 (cd/1000 lm) <table><thead><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr></thead><tbody><tr><td>0</td><td>473</td><td>473</td><td>473</td><td></td><td></td></tr><tr><td>10</td><td>473</td><td>479</td><td>471</td><td></td><td></td></tr><tr><td>20</td><td>447</td><td>455</td><td>445</td><td></td><td></td></tr><tr><td>30</td><td>389</td><td>389</td><td>393</td><td></td><td></td></tr><tr><td>40</td><td>307</td><td>308</td><td>302</td><td></td><td></td></tr><tr><td>50</td><td>197</td><td>196</td><td>188</td><td></td><td></td></tr><tr><td>60</td><td>100</td><td>102</td><td>89</td><td></td><td></td></tr><tr><td>70</td><td>43</td><td>43</td><td>40</td><td></td><td></td></tr><tr><td>80</td><td>9</td><td>10</td><td>10</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></tbody></table>															A-0	B-B	C-0	A'-0	C'-0	0	473	473	473			10	473	479	471			20	447	455	445			30	389	389	393			40	307	308	302			50	197	196	188			60	100	102	89			70	43	43	40			80	9	10	10			90						100						110						120						130						140						150						160						170						180					
		A-0															B-B	C-0	A'-0	C'-0																																																																																																																				
	0	473															473	473																																																																																																																						
10	473	479	471																																																																																																																																					
20	447	455	445																																																																																																																																					
30	389	389	393																																																																																																																																					
40	307	308	302																																																																																																																																					
50	197	196	188																																																																																																																																					
60	100	102	89																																																																																																																																					
70	43	43	40																																																																																																																																					
80	9	10	10																																																																																																																																					
90																																																																																																																																								
100																																																																																																																																								
110																																																																																																																																								
120																																																																																																																																								
130																																																																																																																																								
140																																																																																																																																								
150																																																																																																																																								
160																																																																																																																																								
170																																																																																																																																								
180																																																																																																																																								
中	0.81																																																																																																																																							
否	0.76																																																																																																																																							