
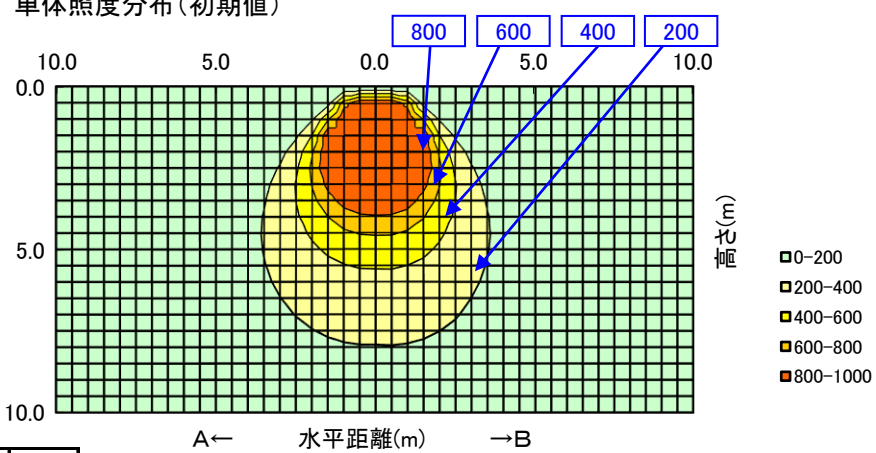
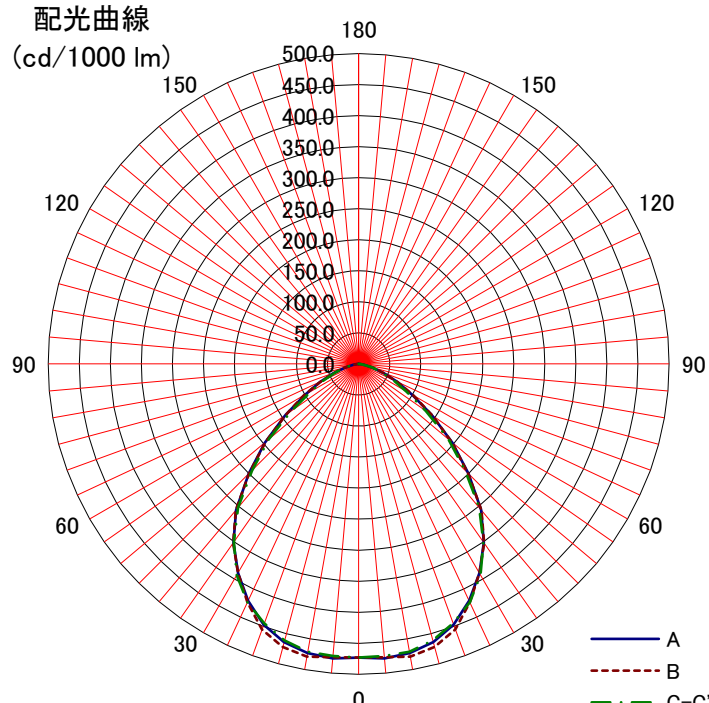


日立照明器具 照明特性																
名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	形式: MTE28BMN-X24A	床	10%													
姿図 	室指数	固有照明率 S/H=1.0														
	<備考>	0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41
		0.8	0.75	0.65	0.59	0.74	0.65	0.59	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52
		1	0.81	0.72	0.66	0.80	0.72	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.61	0.59
		1.25	0.86	0.79	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.68	0.75	0.71	0.67	0.65
		1.5	0.90	0.83	0.78	0.89	0.82	0.78	0.74	0.81	0.76	0.73	0.79	0.75	0.72	0.70
		2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77
		2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81
		3	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83
	光源形式	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87
-	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90	
器具光束	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93	
26,500 lm	10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.99	0.96	
器具効率 Ft= 100%		単体照度分布(初期値) 														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔		配光曲線 (cd/1000 lm) 														
A-A 1.22 H																
B-B 1.22 H																
保守率																
良	0.83															
中	0.81															
否	0.76															
光度 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0											
0	473	473	473													
10	473	479	471													
20	447	455	445													
30	389	389	393													
40	307	308	302													
50	197	196	188													
60	100	102	89													
70	43	43	40													
80	9	10	10													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																