
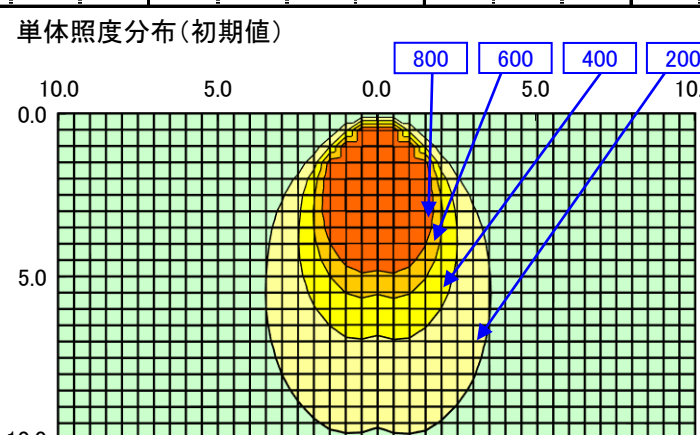
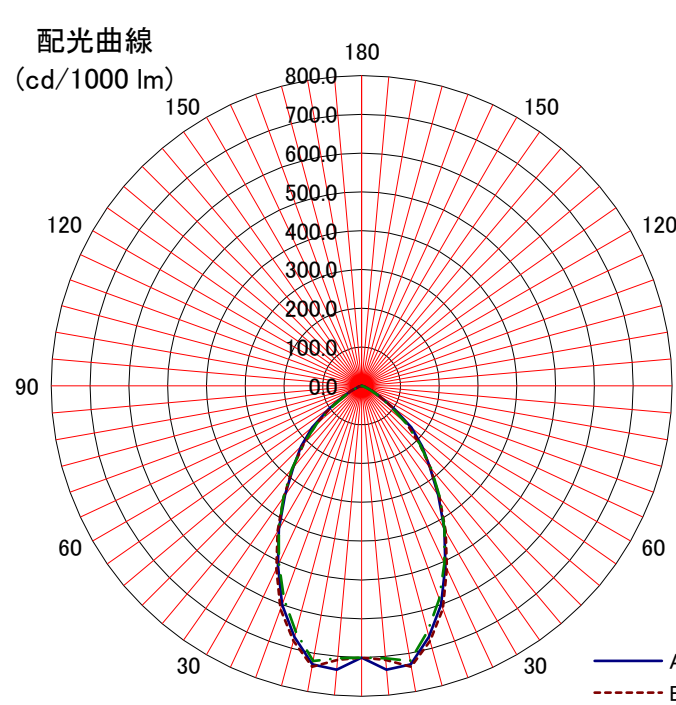


日立照明器具 照明特性

名称: 高天井用LED器具	天井 反射率	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: MTE28BNN-J24A	床 室指数	10%															0%
		固有照明率 S/H=1.0															
〈備考〉 	0.6	0.72	0.63	0.58	0.71	0.63	0.58	0.54	0.62	0.57	0.54	0.61	0.57	0.54	0.52		
	0.8	0.81	0.73	0.68	0.80	0.73	0.68	0.64	0.71	0.67	0.64	0.71	0.66	0.63	0.62		
	1	0.86	0.79	0.74	0.85	0.79	0.74	0.70	0.77	0.73	0.70	0.76	0.73	0.70	0.68		
	1.25	0.90	0.84	0.80	0.89	0.84	0.79	0.76	0.82	0.79	0.76	0.81	0.78	0.75	0.73		
	1.5	0.94	0.88	0.84	0.92	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.79	0.78		
	2	0.97	0.93	0.90	0.96	0.92	0.89	0.86	0.91	0.88	0.86	0.89	0.87	0.85	0.83		
	2.5	0.99	0.96	0.93	0.98	0.95	0.92	0.90	0.93	0.91	0.89	0.92	0.90	0.88	0.86		
光源形式 —	3	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.87		
	4	1.02	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90		
器具光束 26,500 lm	5	1.04	1.02	1.00	1.02	1.01	0.99	0.97	0.99	0.97	0.96	0.97	0.96	0.94	0.92		
	7	1.05	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.95		
	10	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97		
器具効率 Ft= 100%		単位照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔		配光曲線 (cd/1000 lm) 															
A-A 1.00 H																	
B-B 1.02 H																	
保守率	良	0.83															
	中	0.81															
	否	0.76															
光度 (cd/1000 lm)																	
	A-0	B-B	C-0	A'-0	C'-0												
0	700	700	700														
10	729	735	720														
20	600	612	585														
30	426	433	427														
40	273	276	280														
50	167	152	150														
60	57	55	45														
70	12	12	7														
80	3	3	3														
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	