
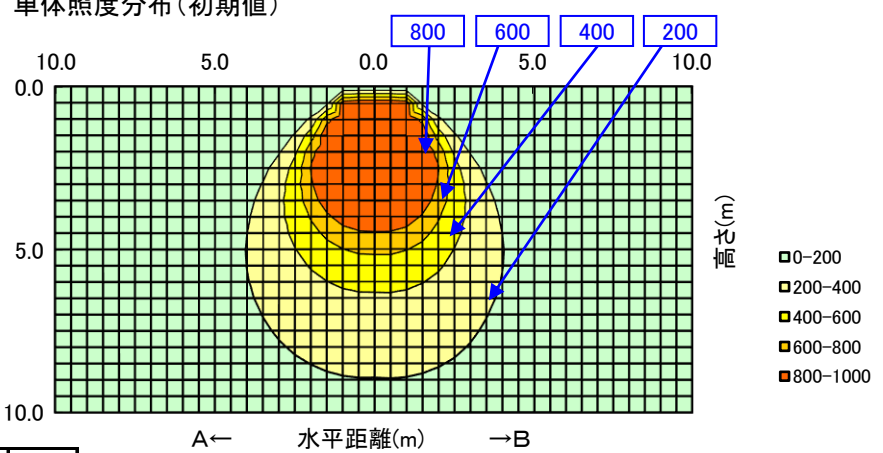
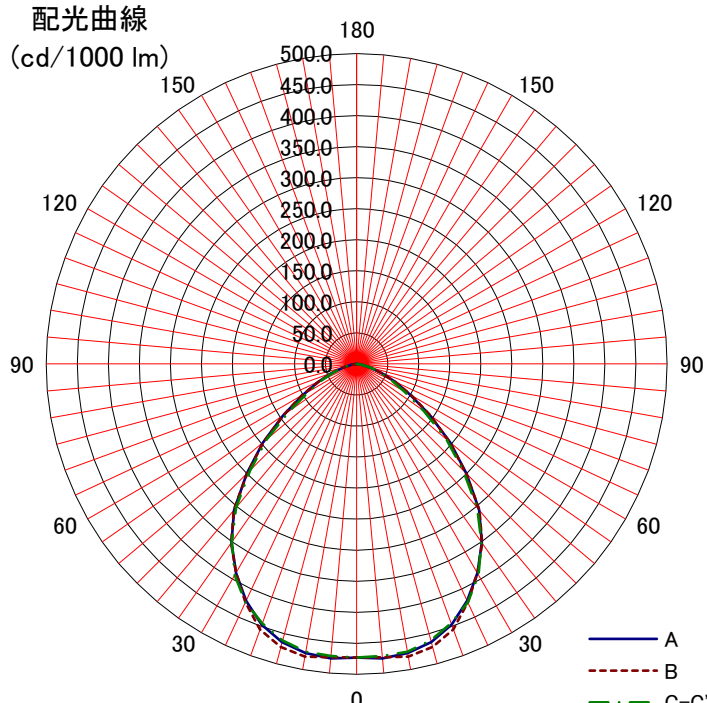


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井 壁 床	80%			70%				50%			30%			0%																																																																																																																								
				70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																								
形式: MTE34BMN-J24A		室指数	固有照明率 S/H=1.0															0%																																																																																																																							
10%																		0%																																																																																																																							
<備考>		0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41																																																																																																																									
		0.8	0.75	0.65	0.59	0.74	0.65	0.59	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52																																																																																																																									
姿図 		1	0.81	0.72	0.66	0.80	0.72	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.61	0.59																																																																																																																									
		1.25	0.86	0.79	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.68	0.75	0.71	0.67	0.65																																																																																																																									
		1.5	0.90	0.83	0.78	0.89	0.82	0.78	0.74	0.81	0.76	0.73	0.79	0.75	0.72	0.70																																																																																																																									
		2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77																																																																																																																									
		2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81																																																																																																																									
		3	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83																																																																																																																									
光源形式		4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87																																																																																																																									
-		5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90																																																																																																																									
器具光束		7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93																																																																																																																									
33,700 lm		10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.99	0.96																																																																																																																									
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																							
上方光束 Fu= 0%																																																																																																																																									
下方光束 Fd= 100%																																																																																																																																									
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																							
A-A 1.22 H																																																																																																																																									
B-B 1.22 H																																																																																																																																									
保守率																																																																																																																																									
良 0.83		光度 (cd/1000 lm) <table><tr><th></th><th>A-0</th><th>B-B</th><th>C-0</th><th>A'-0</th><th>C'-0</th></tr><tr><td>0</td><td>473</td><td>473</td><td>473</td><td></td><td></td></tr><tr><td>10</td><td>473</td><td>479</td><td>471</td><td></td><td></td></tr><tr><td>20</td><td>447</td><td>455</td><td>445</td><td></td><td></td></tr><tr><td>30</td><td>389</td><td>389</td><td>393</td><td></td><td></td></tr><tr><td>40</td><td>307</td><td>308</td><td>302</td><td></td><td></td></tr><tr><td>50</td><td>197</td><td>196</td><td>188</td><td></td><td></td></tr><tr><td>60</td><td>100</td><td>102</td><td>89</td><td></td><td></td></tr><tr><td>70</td><td>43</td><td>43</td><td>40</td><td></td><td></td></tr><tr><td>80</td><td>9</td><td>10</td><td>10</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>																	A-0	B-B	C-0	A'-0	C'-0	0	473	473	473			10	473	479	471			20	447	455	445			30	389	389	393			40	307	308	302			50	197	196	188			60	100	102	89			70	43	43	40			80	9	10	10			90						100						110						120						130						140						150						160						170						180					
	A-0																	B-B	C-0	A'-0	C'-0																																																																																																																				
0	473																	473	473																																																																																																																						
10	473																	479	471																																																																																																																						
20	447																	455	445																																																																																																																						
30	389																	389	393																																																																																																																						
40	307																	308	302																																																																																																																						
50	197																	196	188																																																																																																																						
60	100																	102	89																																																																																																																						
70	43																	43	40																																																																																																																						
80	9																	10	10																																																																																																																						
90																																																																																																																																									
100																																																																																																																																									
110																																																																																																																																									
120																																																																																																																																									
130																																																																																																																																									
140																																																																																																																																									
150																																																																																																																																									
160																																																																																																																																									
170																																																																																																																																									
180																																																																																																																																									
中 0.81																																																																																																																																									
否 0.76																																																																																																																																									