

日立照明器具 照明特性


名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
		床	10%													
形式: MTE34BMN-X24A	室指数	固有照明率 S/H=1.0														
〈備考〉	0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41	
	0.8	0.75	0.65	0.59	0.74	0.65	0.59	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52	
姿図	1	0.81	0.72	0.66	0.80	0.72	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.61	0.59	
	1.25	0.86	0.79	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.68	0.75	0.71	0.67	0.65	
	1.5	0.90	0.83	0.78	0.89	0.82	0.78	0.74	0.81	0.76	0.73	0.79	0.75	0.72	0.70	
	2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77	
	2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81	
	3	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83	
	光源形式	4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87
—	5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90	
器具光束	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93	
33,700 lm	10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.99	0.96	

器具効率 F_t =	100%
上方光束 F_u =	0%
下方光束 F_d =	100%

最大取付間隔		
A-A	1.22	H
B-B	1.22	H
保守率	良	0.83
	中	0.81
	否	0.76

光 度 (cd/1000 lm)			10.0		
	A-0	B-B	C-0	A'-0	C'-0
0	473	473	473		
10	473	479	471		
20	447	455	445		
30	389	389	393		
40	307	308	302		
50	197	196	188		
60	100	102	89		
70	43	43	40		
80	9	10	10		
90					
100					
110					
120					
130					
140					
150					
160					
170					
180					

单体照度分布(初期値)

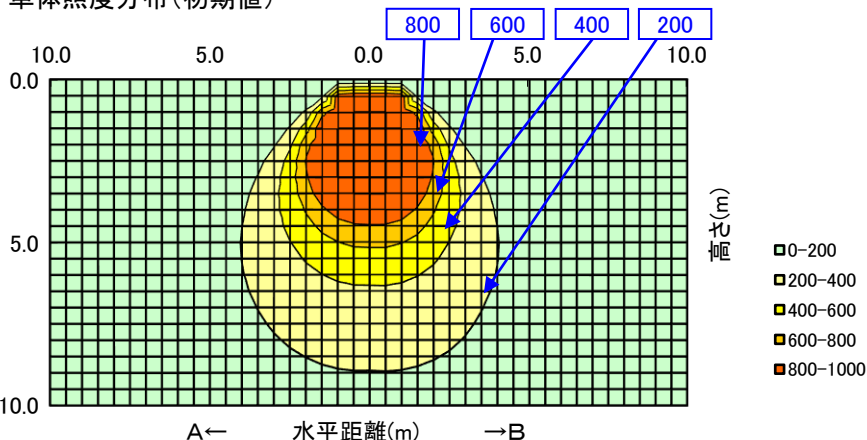

配光曲線
(cd/1000 lm)

