
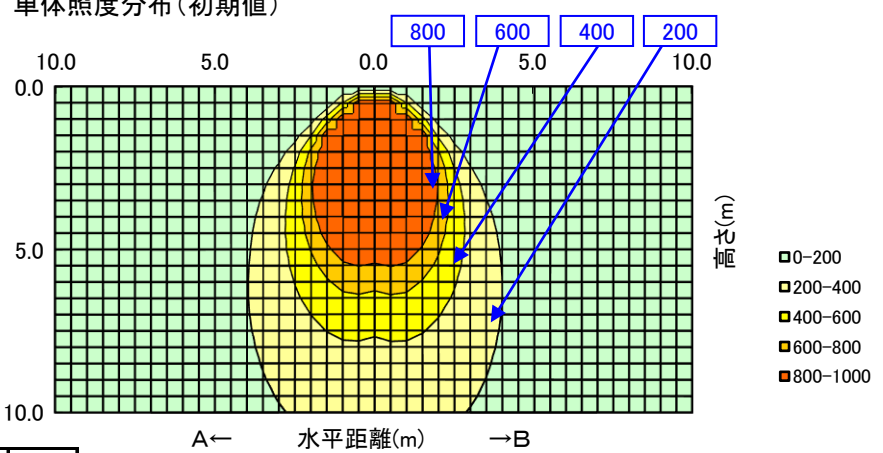
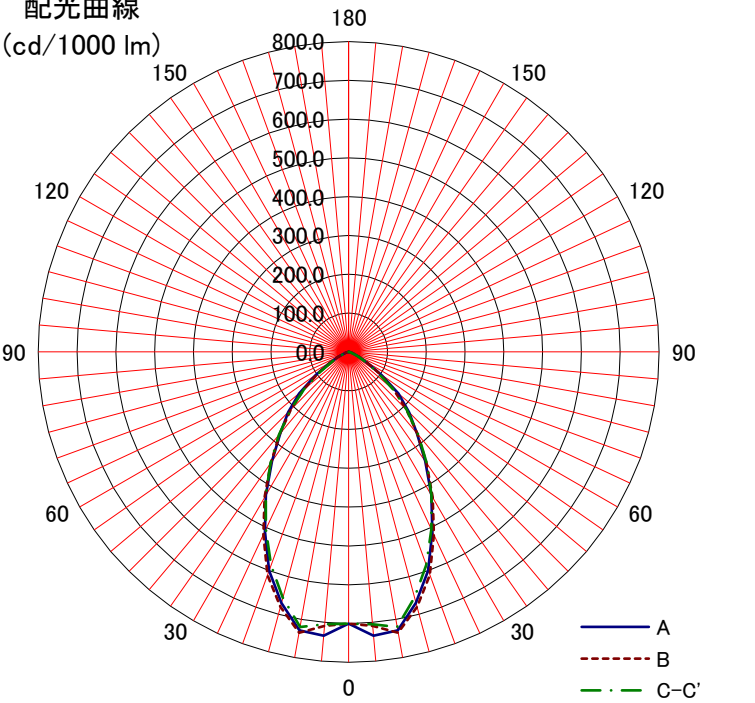


日立照明器具 照明特性

名称: 高天井用LED器具		天井 反射率	80%			70%				50%			30%			0%
			壁 70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
形式: MTE34BNN-J24A		床 10%	固有照明率 S/H=1.0													0%
			室指数													
〈備考〉		0.6	0.72	0.63	0.58	0.71	0.63	0.58	0.54	0.62	0.57	0.54	0.61	0.57	0.54	0.52
		0.8	0.81	0.73	0.68	0.80	0.73	0.68	0.64	0.71	0.67	0.64	0.71	0.66	0.63	0.62
姿図 		1	0.86	0.79	0.74	0.85	0.79	0.74	0.70	0.77	0.73	0.70	0.76	0.73	0.70	0.68
		1.25	0.90	0.84	0.80	0.89	0.84	0.79	0.76	0.82	0.79	0.76	0.81	0.78	0.75	0.73
		1.5	0.94	0.88	0.84	0.92	0.88	0.84	0.81	0.86	0.83	0.80	0.85	0.82	0.79	0.78
		2	0.97	0.93	0.90	0.96	0.92	0.89	0.86	0.91	0.88	0.86	0.89	0.87	0.85	0.83
		2.5	0.99	0.96	0.93	0.98	0.95	0.92	0.90	0.93	0.91	0.89	0.92	0.90	0.88	0.86
		3	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.90	0.87
光源形式 -		4	1.02	1.00	0.98	1.01	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90
		5	1.04	1.02	1.00	1.02	1.01	0.99	0.97	0.99	0.97	0.96	0.97	0.96	0.94	0.92
器具光束 33,700 lm		7	1.05	1.04	1.03	1.04	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.98	0.97	0.95
		10	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97
器具効率 Ft= 100%		単体照度分布(初期値)														
上方光束 Fu= 0%																
下方光束 Fd= 100%																
最大取付間隔																
A-A 1.00 H																
B-B 1.02 H																
保守率	良	0.83														
	中	0.81														
	否	0.76														
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm)														
	A-0	B-B	C-0	A'-0	C'-0											
0	700	700	700													
10	729	735	720													
20	600	612	585													
30	426	433	427													
40	273	276	280													
50	167	152	150													
60	57	55	45													
70	12	12	7													
80	3	3	3													
90																
100																
110																
120																
130																
140																
150																
160																
170																
180																