
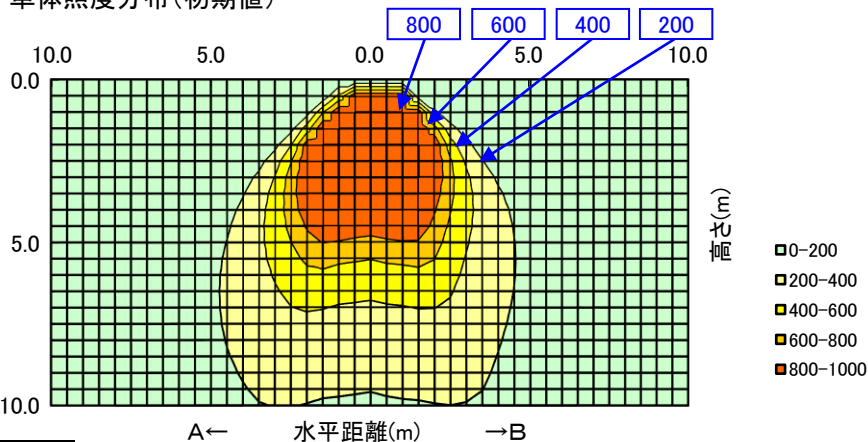
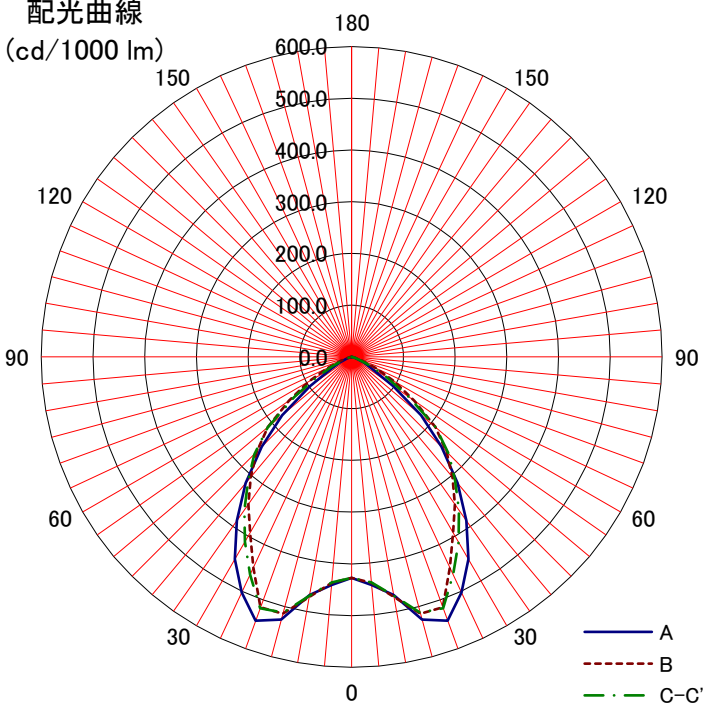


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%																																																																																																																							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																																																																																																																							
		床	10%														0%																																																																																																																						
形式: MTE44AMN-J24A	室指数	固有照明率 S/H=1.0																																																																																																																																					
<備考> 配光角(広角)	0.6	0.67	0.57	0.51	0.66	0.57	0.51	0.47	0.56	0.50	0.46	0.55	0.50	0.46	0.45																																																																																																																								
	0.8	0.77	0.68	0.62	0.76	0.68	0.62	0.58	0.66	0.61	0.57	0.65	0.61	0.57	0.55																																																																																																																								
姿図 	1	0.83	0.75	0.69	0.82	0.74	0.69	0.65	0.73	0.68	0.65	0.72	0.68	0.64	0.62																																																																																																																								
	1.25	0.88	0.81	0.76	0.87	0.80	0.75	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.69																																																																																																																								
	1.5	0.92	0.86	0.81	0.91	0.85	0.80	0.77	0.83	0.79	0.76	0.82	0.78	0.76	0.74																																																																																																																								
	2	0.96	0.91	0.87	0.95	0.90	0.87	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.80																																																																																																																								
	2.5	0.99	0.94	0.91	0.97	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.88	0.85	0.83																																																																																																																								
	3	1.00	0.96	0.93	0.99	0.95	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86																																																																																																																								
光源形式	4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.93	0.91	0.89																																																																																																																								
	5	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.97	0.95	0.96	0.95	0.94	0.91																																																																																																																								
器具光束 43,000 lm	7	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94																																																																																																																								
	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97																																																																																																																								
器具効率 Ft= 100%		単体照度分布(初期値) 																																																																																																																																					
上方光束 Fu= 0%																																																																																																																																							
下方光束 Fd= 100%																																																																																																																																							
最大取付間隔		配光曲線 (cd/1000 lm) 																																																																																																																																					
A-A 1.40 H																																																																																																																																							
B-B 1.32 H																																																																																																																																							
保守率	良															0.81																																																																																																																							
	中															0.79																																																																																																																							
	否															0.75																																																																																																																							
光度 (cd/1000 lm)																<table><tr><td></td><td>A-0</td><td>B-B</td><td>C-0</td><td>A'-0</td><td>C'-0</td></tr><tr><td>0</td><td>427</td><td>427</td><td>427</td><td></td><td></td></tr><tr><td>10</td><td>467</td><td>471</td><td>468</td><td></td><td></td></tr><tr><td>20</td><td>543</td><td>515</td><td>517</td><td></td><td></td></tr><tr><td>30</td><td>452</td><td>392</td><td>413</td><td></td><td></td></tr><tr><td>40</td><td>319</td><td>303</td><td>311</td><td></td><td></td></tr><tr><td>50</td><td>175</td><td>211</td><td>212</td><td></td><td></td></tr><tr><td>60</td><td>46</td><td>95</td><td>77</td><td></td><td></td></tr><tr><td>70</td><td>11</td><td>22</td><td>15</td><td></td><td></td></tr><tr><td>80</td><td>1</td><td>3</td><td>1</td><td></td><td></td></tr><tr><td>90</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>100</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>110</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>120</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>130</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>140</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>150</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>160</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>170</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>180</td><td></td><td></td><td></td><td></td><td></td></tr></table>															A-0	B-B	C-0	A'-0	C'-0	0	427	427	427			10	467	471	468			20	543	515	517			30	452	392	413			40	319	303	311			50	175	211	212			60	46	95	77			70	11	22	15			80	1	3	1			90						100						110						120						130						140						150						160			
	A-0	B-B	C-0	A'-0	C'-0																																																																																																																																		
0	427	427	427																																																																																																																																				
10	467	471	468																																																																																																																																				
20	543	515	517																																																																																																																																				
30	452	392	413																																																																																																																																				
40	319	303	311																																																																																																																																				
50	175	211	212																																																																																																																																				
60	46	95	77																																																																																																																																				
70	11	22	15																																																																																																																																				
80	1	3	1																																																																																																																																				
90																																																																																																																																							
100																																																																																																																																							
110																																																																																																																																							
120																																																																																																																																							
130																																																																																																																																							
140																																																																																																																																							
150																																																																																																																																							
160																																																																																																																																							
170																																																																																																																																							
180																																																																																																																																							